ASTRONOMY NUMBER

Sept.

Science and Invention

25 cents

FORMERLY
ELECTRICAL EXPERIMENTER

TOTAL ECLIPSE OF THE SUN SEPT. 10th

See Page 430

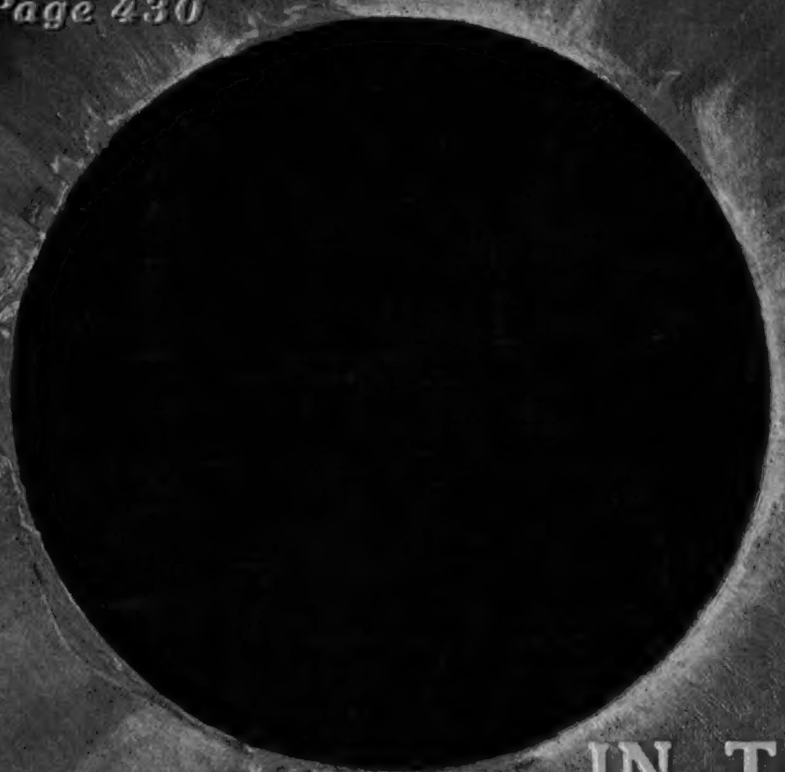

IN THIS ISSUE

Articles by

Prof. William H. Pickering, Ph.D.; L.L.D.
Of the Harvard Observatory

Isabel M. Lewis, M. A.
Of the U. S. Naval Observatory

Professor Vladimir Karapetoff

Professor Harold F. Richards, Ph.D.

E. B. "Farmer" Dunn

Clement Fezandié

Dr. Ernest Bade

Professor Joseph Dunninger

Digitized by Google
Original from UNIVERSITY OF CHICAGO

Your Job!

Make it Pay You $70 to $200 a Week

Be a Certificated Electrical Expert

Free **Electrical Working Outfit, Radio Course Employment Service**

I give each student a splendid Outfit of Electrical Tools, Materials and Measuring Instruments absolutely FREE. You do PRACTICAL work—AT HOME with this Outfit. You start right in after the first few lessons to WORK AT YOUR PROFESSION in a practical way. I also give free a complete Radio course and a special course for men going into business for themselves.

Get Started Now — MAIL COUPON

I want to send the "Vital Facts" of the Electrical Industry including my Electrical Book, Proof Lessons and a sample of my guarantee bond FREE. These cost you nothing and you'll enjoy them. Make the start today for a bright future in Electricity. Send in the coupon — NOW.

L. L. COOKE, Chief Engineer
Chicago Engineering Works
Dept. 26 — 2150 Lawrence Ave., Chicago

Use this Free Outfit Coupon!

L. L. COOKE, Chief Engineer
Chicago Engineering Works, Dept. 26
2150 Lawrence Avenue, Chicago, Illinois

Dear Sir:—Send me at once the "Vital Facts" containing Sample Lessons, your Big Book and full particulars of your Free Outfit and Home Study Course —all fully prepaid, without obligation on my part.

Name .....

Address .....

City and State .....

Occupation ..... Age .....

It's a shame for you to work for small pay when Trained "Electrical Experts" are in great demand at such high salaries, and the opportunities for advancement and a big success in this line are the greatest ever known. "Electrical Experts" earn $70 to $200 a week. Fit yourself for one of these big paying positions.

Learn at Home to Earn $12 to $30 a Day

Today even the ordinary Electrician—the "screwdriver" kind—is making money—big money. But it's the trained man—the man who knows the whys and wherefores of Electricity — the "Electrical Expert" — who is picked out to "boss" ordinary Electricians—to boss Big Jobs—the jobs that pay. You, too, can learn to fill one of these jobs —spare time only is needed. BE AN "ELECTRICAL EXPERT"—earn $70 to $200 a week.

Other Men Are Doing It—You Can Do It Too

J. R. Morgan of Delaware, Ohio, earns from $30.00 to $50.00 a day since completing my course. He used to earn $5.00 a day as a carpenter's helper. W. E. Pence, a $35.00 a week mechanic of Chehalis, Wash., made almost $10,000.00 last year doing electrical work in a town where he didn't think he could earn a dime. Harold Hastings, of Somers, Mass., only 21 years old, cleans up $480.00 a month. He was still in high school when he started on my course. Joe Cullari, 523 N. Clinton Ave., Trenton, N. J., increased his income 300% in one year and frequently makes the entire cost of his course back in one day's time. Fred Fritchman, 3959 Amundson Ave., New York City, makes $450.00 every month. He was a $15.00 a week man when he first came to me for help.

Age or Lack of Experience No Drawback

You don't have to be a College Man; you don't have to be a High School graduate. If you can read and write English, my course will make you a big success. It is the most simple, thorough and successful Electrical Course in existence, and offers every man, regardless of age, education, or previous experience, the chance to become in a very short time an "Electrical Expert," able to make from $70 to $200 a week.

I Give You a Real Training

As Chief Engineer of the Chicago Engineering Works, I know exactly the kind of training a man needs to get the best positions at the highest salaries. Hundred of my students are now earning $3,500 to $10,000 a year. Many are successful ELECTRICAL CONTRACTORS.

Your Satisfaction Guaranteed

So sure am I that you can learn Electricity —so sure am I that after studying with me, you too, can get into the "big money" class in electrical work, that I will guarantee under bond to return every single penny paid me in tuition if, when you have finished my course, you are not satisfied it was the best investment you ever made.

The "Cooke" Trained Man is the "Big Pay" Man

Digitized by Google
Original from UNIVERSITY OF CHICAGO

BE AN ELECTRICAL TECHNICIAN

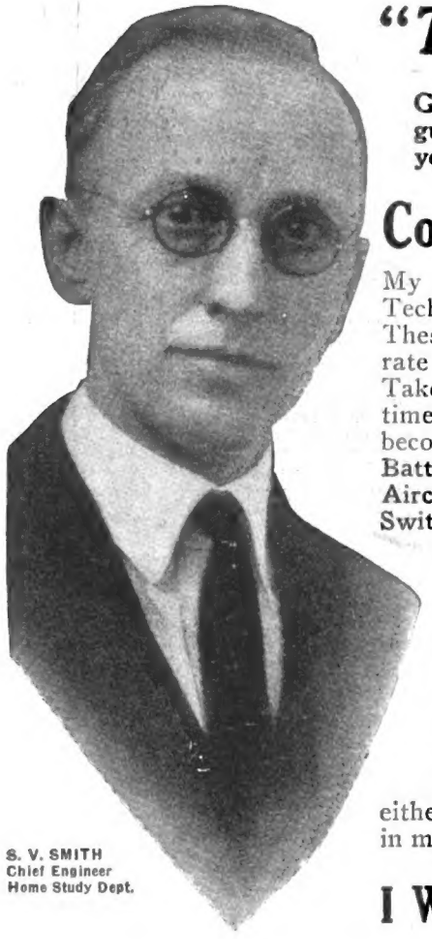

S. V. SMITH
Chief Engineer
Home Study Dept.

"The Highest Paid Electrical Expert"

Get your Electrical Technician's Certificate through me, and you will be guaranteed the aid of my organization to secure you a position paying you the highest salary you ever received to start.

Command $250 to $600 Monthly

My course is designed to fit you for a position as Electrical Technician, Supervisor, Foreman or Manager of Equipment. These positions cover the Electro-technical field and pay a rate of compensation running into thousands of dollars a year. Take my Home Study Course and prepare yourself in spare time by this most simple, direct and inexpensive method, to become an expert in **Motor Maintenance, Armature Winding, Battery, Sub-Station and Power House Work, Automotive, Aircraft, Tractor and Illuminating Engineering, Generator, Switchboard and House-Wiring, Transmission, Installation and Line Construction,** and I will not only guarantee your success in this study, but I will undertake to train you until you are actually earning $3000.00 a year. More than that, when you graduate, and are qualified to receive your Electrical Technician's Certificate from me, if you are not more than pleased with your training, if you are not fully convinced your earning power has been GREATLY INCREASED, or if you are not completely satisfied you can hold down a high-class job at the highest rate of compensation paid men of your experience—either you may come in with me and finish your training here in my plant—at no cost to you—or—

I WILL GIVE YOU MY COURSE—FREE

The Only Course in America Publicly Endorsed by Its Students

READ THIS

We, the undersigned, a committee representing students of the S. & H. Electrical Works, now actually taking this course, do hereby certify that it is *equal* and also *superior* to all claims, and that Mr. S. V. Smith *can* and *will* do all he agrees.

Signed:
J. H. KILLIAN,
GEORGE DOBRUSIN,
STANLEY BERGER,
KENNETH E. JONES,
JOE LONDO.

There are not "ifs" nor "buts" about this offer. If you have a common school education, and will agree to study a little evenings for a few months, I guarantee to train you to be a first-class man, or the course need not cost you one penny. Therefore, write at once, or mail the coupon, for full details of my truly remarkable proposition. Do this NOW, to avoid possible disappointment.

Splendid Outfit Free with My Course

I will ship to you from stock a commercial-sized ELECTRICAL MOTOR and a working outfit of electrical instruments, new material, wire, appliances and apparatus, freight prepaid and absolutely FREE. Simply send me the coupon, or write me, AT ONCE, and become a student of this simplified, Home Study Course, and this outfit becomes yours without one extra penny cost to you. It will enable you to do experimental and practical electrical work right in your own home, and, in conjunction with my unlimited, personal supervision, should aid you to be actually making money within a very short time.

RADIO FREE In addition to the wonderful electrical outfit mentioned above, if you reply to this ad promptly, I shall also give you, without cost to you, a complete EXPERT'S training in Radio. With this up-to-the-minute, FREE course in Radio (covering Construction, Operation and Installation), and my help—it is possible for you to make 50.00 a week right in your own home town, while learning. This is a wonderful opportunity for you, for I shall supply what you need to do this at no expense to you, and you can start RIGHT IN—AT ONCE. Get details NOW—Send Coupon, or write me—TODAY. ACT—for results.

S. V. SMITH, Chief Engineer

Home Study Department, S. & H. Electrical Works

Desk KK-3

308 So. Green Street - - - - Chicago, Ill.

MAIL THIS FOR BIG FREE OFFER

Desk KK-3,
S. V. SMITH,
Chief Engineer
Home Study Dept.
S. & H. Electrical Works
308 So. Green Street,
Chicago.

Dear Sir: I am interested in your guaranteed Home Study Course of training in the best-paid divisions of electricity; also how you aid me free to make money while learning. Send particulars at once free of charge.

Name.....
Address.....
.....

Digitized by Google
Original from UNIVERSITY OF CHICAGO

Vol. XI
Whole No. 125

Science and Invention

FORMERLY

ELECTRICAL EXPERIMENTER

September, 1923
No. 5

PUBLICATION OFFICE: 542 Jamaica Ave., Jamaica, N.Y.
EDITORIAL & GENERAL OFFICES: 53 Park Place, New York City

Published by Experimenter Publishing Company, Inc. (H. Gernsback, Pres.; S. Gernsback, Treas.; R. W. DeMott, Sec'y).
Publishers of SCIENCE AND INVENTION, RADIO NEWS, and PRACTICAL ELECTRICS

Table of Contents for September

POPULAR SCIENTIFIC ARTICLES

EDITORIAL 423
HYPNOTISM BY RADIO NOW POSSIBLE 425
By Edward H. London
HOW SUBMARINES DIVE AND RISE 426
By Irwin R. Fahrlaender
IMPORTANT ANNOUNCEMENT OF CHANGE IN SCIENCE & INVENTION, Beginning With the October Number 427
WHAT WE DIE OF 428
WHAT TEMPERATURE CAN WE STAND? 429
By Joseph H. Kraus, Staff Medical Expert

ASTRONOMY ARTICLES

POPULAR ASTRONOMY—THE TOTAL SOLAR ECLIPSE OF SEPT. 10th VISIBLE IN THE UNITED STATES AND MEXICO 431
By Isabel M. Lewis, M.A., of the U. S. Naval Observatory.
THE PLANET MARS 432
By Prof. William H. Pickering, Harvard College Observatory, Mandeville, Jamaica, B.W.I.
THE LARGEST AND SMALLEST PLANETS 433
By Charles Nevers Holmes
AROUND THE UNIVERSE—THIRD INSTALLMENT 434
By Ray Cummings
DR. HACKENSAW'S SECRETS—No. 20—A Car for the MOON 436
By Clement Fezandié
VARIABLE STARS 437
By Rufus O. Suter, Jr.
STAR CLUSTERS 438
By Basil Newcomb, of the Harvard College Observatory.
HIGH POWER TELESCOPE FOR YOUR GARDEN 439
THE PARIS OBSERVATORY 440
A RIGID CELESTIAL TELESCOPE MOUNT 441
By George A. Luers
EINSTEIN'S RESTRICTED THEORY OF RELATIVITY EXPLAINED ON A MODEL 442
By Vladimir Karapetoff, Professor Electrical Engineering, Cornell University.
HOW TO FORECAST THE WEATHER 443
By E. B. "Farmer" Dunn.
SPECTROSCOPES—HOW TO BUILD THEM 444
By C. E. Barns.
MAN AND THE STARS 445
By J. S. Dow.
TANTALUM—ALL ABOUT IT 446
By O. Ivan Lee, B.Sc.
BIRDS THAT HAD TEETH 448
By Carroll Lane Fenton
UNBREAKABLE GLASS OF THE FUTURE 448
CAMERA OBSCURA FOR PUBLIC USE 449
By Lewis Yeager
LIQUID AND SOLID HYDROGEN IN QUANTITY PRODUCTION 449
By S. R. Winters.
OXYGEN APPARATUS FOR MOUNTAIN CLIMBERS 450
By Dr. Albert Neuburger.
WEIGHING OF PRECIOUS STONES SUPPORTS EINSTEIN 450
By S. R. Winters.
SPEED—PART 4 451
By Harold F. Richards, Ph.D.
LUMINOUS WATER SIGNS 452
PARACHUTE FOR MOUNTAIN CLIMBERS 453
FISH LINE INDICATES 'PLANE'S HEIGHTS 453
MOTOR CAR LEAPS, LOOPS, AND SKIDS 454
By Harold F. Richards, Ph.D., of the Graduate College, Princeton, N. J.
SCIENTIFIC PROBLEMS AND PUZZLES—NO. 10 OF A SERIES 456
By Ernest K. Chapin.
MAGIC FOR EVERYBODY 457
By Prof. Joseph Dunninger.
EXPERIMENTAL ELECTRO-CHEMISTRY 458
By Raymond B. Wailes.
PRACTICAL CHEMICAL EXPERIMENTS—INTERESTING FACTS ABOUT SULPHUR 459
By Raymond B. Wailes.

PRIZE CONTESTS

HOW-TO-MAKE-IT DEPARTMENT — $30.00 IN PRIZES MONTHLY 465
WRINKLES RECIPES AND FORMULAS — $5.00 PRIZE MONTHLY 466
Edited by S. Gernsback.

AUTOMOBILES

MOTOR CAR LEAPS, LOOPS, AND SKIDS 454
By Harold F. Richards, Ph.D., of the Graduate College, Princeton, N. J.

ELECTRICITY

HOW SUBMARINES DIVE AND RISE 426
By Irwin R. Fahrlaender, Late of the U. S. Navy, Submarine Division.
TANTALUM—ALL ABOUT IT 446
By O. Ivan Lee, B.Sc.
SPEED—PART 4 451
By Harold F. Richards, Ph.D.
LUMINOUS WATER SIGNS 452
SCIENTIFIC PROBLEMS AND PUZZLES—No. 10 OF A SERIES 456
By Ernest K. Chapin.
EXPERIMENTAL ELECTRO-CHEMISTRY 458
By Raymond B. Wailes.
SELENIUM STAR PHOTOMETER 460
By Lewis J. Boss.
HOW-TO-MAKE-IT DEPARTMENT — $30.00 IN PRIZES MONTHLY 465
LATEST PATENTS 478
THE ORACLE 479
PATENT ADVICE 501

RADIO ARTICLES

HYPNOTISM BY RADIO NOW POSSIBLE 425
By Edward H. London.
COLONEL HEEZALIAR FLIRTS WITH RADIO 467
UNTILIZING WIRED RADIO FOR BROADCASTING 468
By Bert T. Bonaventure.
RADIO FOR THE BEGINNER—XIX AMPLIFICATION 469
By Armstrong Perry.
A ONE TUBE REGENERATIVE RECEIVER 470
By Bert T. Bonaventure.
NEW VACUUM TUBE WITH NINE LIVES 471
A "DX" PORTABLE RECEIVER WITH NOVEL TUNER 473
By P. A. Price.
PITFALLS OF THE RADIO INVENTOR 474
By Everett N. Curtis.
BROADCAST STATION PHOTOS 475
RADIO ORACLE 476
LATEST PATENTS 478

CONSTRUCTOR ARTICLES

A RIGID CELESTIAL TELESCOPE MOUNT 441
By George A. Luers.
SPECTROSCOPES—HOW TO BUILD THEM 444
By C. E. Barns.
SELENIUM STAR PHOTOMETER 460
By Lewis J. Boss.
ETCHING WITHOUT COPPER PLATES 462
By Harry Dunn.

SCIENCE AND INVENTION is published on the 25th of each month. There are 12 numbers per year. Subscription price is $2.50 a year in U. S. and possessions. Canada and foreign countries $3.00 a year. U. S. coin as well as U. S. Stamps accepted (no foreign coin or stamps). Single copies, 25 cents each. A sample copy will be sent gratis on request. Checks and money orders should be drawn to order of EXPERIMENTER PUBLISHING CO., Inc. If you change your address notify us promptly, in order that copies are not miscarried or lost.

All communications and contributions to this journal should be addressed to Editor, SCIENCE AND INVENTION, 542 Jamaica Avenue, Jamaica, New York, or 53 Park Place, New York City, N. Y. Unaccepted contributions cannot be returned unless full postage has been included. ALL accepted contributions are paid for on publication. A special rate is paid for novel experiments; good photographs accompanying them are highly desirable.

SCIENCE AND INVENTION. Monthly. Entered as second-class matter at Jamaica, N. Y., Post Office, under act of Congress of March 3, 1879. Title Registered at the Patent Office. Copyright, 1923, by E. P. Co., Inc., New York. The Contents of this Magazine are copyrighted and must not be reproduced without giving full credit to the publication.

SCIENCE AND INVENTION is for sale at all newsstands in the United States and Canada; also at Brentano's, 37 Avenue de l'Opera, Paris. Member of the Audit Bureau of Circulation.

New York City. General Advertising Dept., 53 Park Place.
Western Advertising Representatives. Finucan & McClure, 720 Cass St., Chicago, Ill.
Pacific Coast Advertising Representatives, A. J. Norris Hill Co., Hearst Bldg., San Francisco, Calif.
Kansas City Advertising Representative, George F. Dillon, Republic Building, Kansas City, Mo.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

SCHOOL of ENGINEERING of Milwaukee

America's Greatest Institution of Electrical Education

Become an Electrical Expert in ½ Year

Or Learn an Electrical Trade in Three Months

Experts Train You in Our Big Laboratories

Come to this great school where practical applied electricity is taught in all its phases, quickly and thoroughly. Here under the guidance of our Staff of Electrical Engineers and Practical Experts, in the most elaborately equipped school laboratories in America, you can become an expert Electrician in ½ year or learn an Electrical Trade in three months.

For over 18 years the School of Engineering of Milwaukee has been training men for brilliant success in all branches of electricity. This great school is devoted exclusively to electrical education and offers you advantages not to be found anywhere else. A large four-story concrete building houses its electrical automotive and chemical laboratories, lecture halls and drafting rooms. Thousands of dollars of equipment, including motors, dynamos, switchboards, ignition, starting and lighting systems, headlight testing laboratories, Radio Broadcasting Station W.I.A.O., etc., etc., are features of the School of Engineering of Milwaukee's magnificent laboratory system. Here the student is thoroughly trained in both the theory and practice of all types of electrical work. He leaves the School fitted for a high salaried position as an electrical expert.

The great field of electricity offers unbounded success to the ambitious, properly trained man. The electrical industry has developed so rapidly that there exists today a great shortage of properly electrically trained men. Decide to train now for a high-paid position in this great, fascinating, uncrowded field. Join our ambitious students—fine, strapping young fellows from every State in the Union—who after a short, intensive training will enter big jobs as electrical experts.

Our school is located in the heart of Milwaukee, a large, up-to-date city with the added attraction of bathing and boating on beautiful Lake Michigan and other lakes in the surrounding country. Our students engage in football, baseball, basketball and other sports; Fraternities, School Band, etc. You will enjoy your training at the School of Engineering of Milwaukee and your time here will pay you golden dividends all the rest of your life in increased earning power and bigger opportunities.

What You Learn

The man who succeeds today must specialize/ He must center his thoughts and efforts on one calling and then stick to it. That's why School of Engineering of Milwaukee first grounds the student in the general theory and practice of electricity, then trains him for whatever branch of the work which he desires to specialize. This makes him both a good electrician and a specialist who can solve the great electrical problems and work for which the high salaries are paid. The highly specialized courses offered by School of Engineering of Milwaukee give you complete, expert knowledge in each particular branch.

Practical Electricity

Course requires six months for completion and gives the student both principles and practice in the application of electricity. The course includes house, factory and theatre wiring, testing and meter work, D. C. and A. C. Armature Winding, motors, generators, transformers, efficiency tests, installation and care of commercial electrical equipment and machinery.

Armature Winding

A three months' course—brief but intensely practical and leading to well paying positions. Instruction under experts who have made thorough studies of most practical and expedient methods in this field. A very popular course among men who desire a short period of intensive training.

Automotive Electricity

A very complete, practical course covering three months' time. Teaches every phase of electric starting, lighting, ignition and storage battery work for automobiles, trucks, tractors, motorcycles, aircraft, etc. Opens up the way to big pay positions in the automotive industry.

Electrical Engineering

with B.S. degree in three years. A faculty of specialists is leading hundreds of young men to sure success. Why not you? Full provision is made for making up deficient high school credits. Don't delay ACTION.

Electrotechnics

Become an Electrotechnician—a special type of expert qualified to fit electricity to the demands of modern industry. Practical electrical training of 1 to 2 years which leads to positions such as superintendent of maintenance, director of construction, radio engineer, superintendent of testing and installing. All of these positions pay extremely well and the work itself is intensely fascinating.

Commercial Electrical Engineering in ONE YEAR

Unparalleled opportunities for brilliant, successful careers in the new field of Commercial Electrical Engineering. To meet the extraordinary present-day demand for trained electrical business men, Consulting and Efficiency Engineers, we offer this thorough, condensed and very practical training, especially adapted to high school graduates and Electrotechnicians.

Term Openings Sept. 4th and Oct. 1st

Your Passport to Success

Mail Coupon Now.

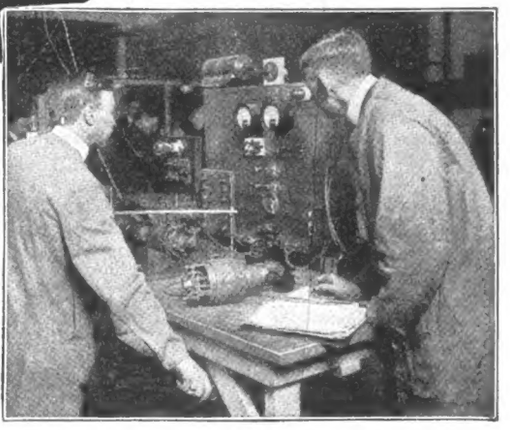

Mail the coupon today for our FREE 72-page Illustrated catalog. Tell us what course interests you most and we will send you special information. Find out about the great opportunity in Electricity today. Learn how we can help you to a permanent and lasting success. Don't put it off! Mail the coupon now!

SCHOOL OF ENGINEERING OF MILWAUKEE
SI—923, 415-417 Marshall St., Milwaukee, Wis.

Please send me without cost or obligation, your big free illustrated book and details of the course which I have indicated below.

Course .....

Name .....

Address .....

City .....State .....

Age ..... Education .....

SCHOOL of ENGINEERING of Milwaukee

S. I.-923, 415-17 Marshall St., Milwaukee, Wisconsin

Digitized by Google Original from UNIVERSITY OF CHICAGO

JUST OFF THE PRESS

12th Edition

WIRELESS COURSE IN 20 LESSONS

By S. GERNSBACK, A. LESCARBOURA and H. W. SECOR

Very Greatly Enlarged

Price
$2.00
Postpaid

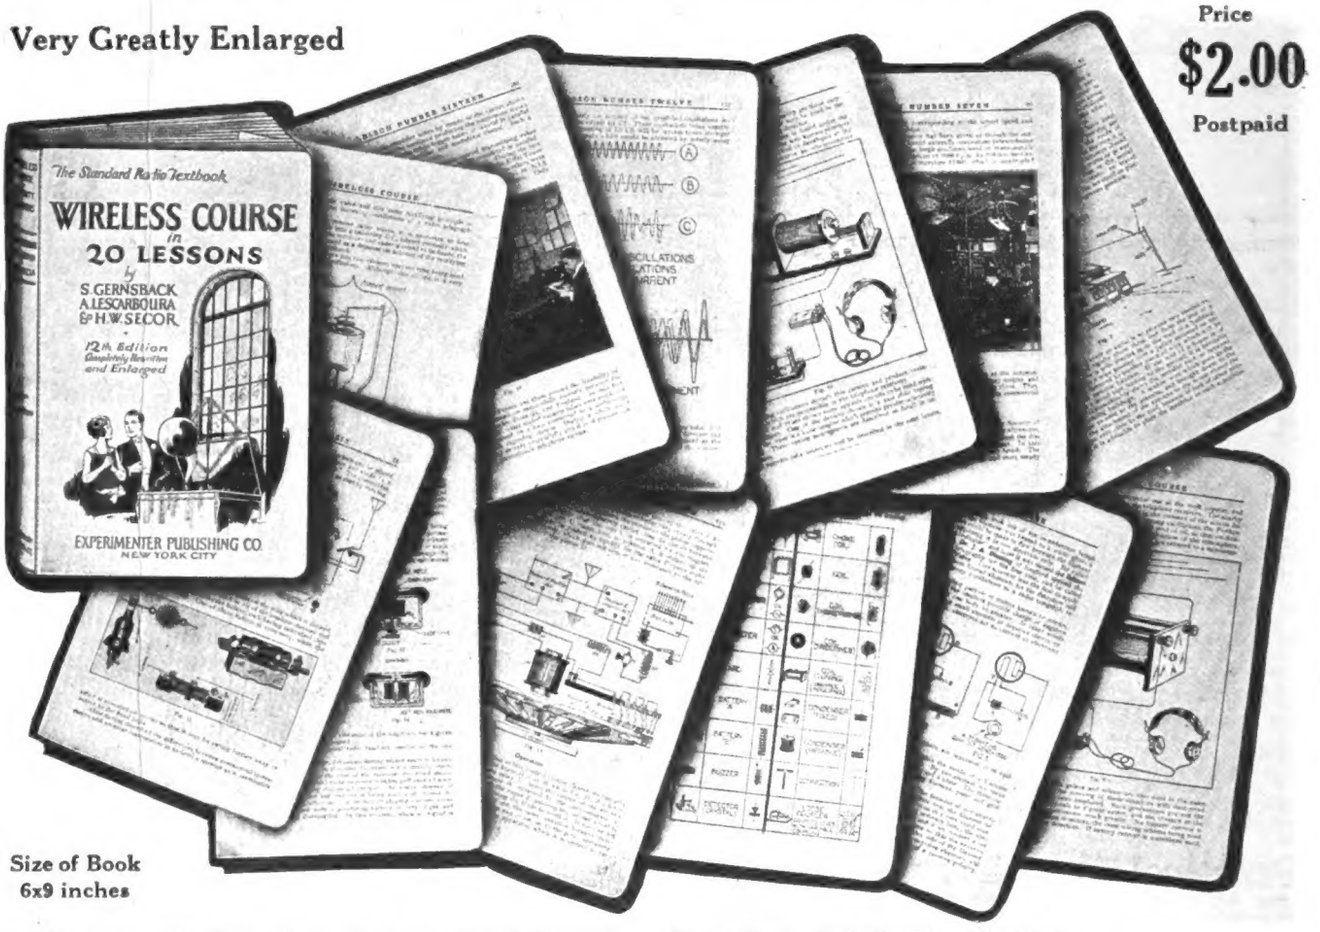

Size of Book
6x9 inches

264 pages. 500 illustrations, diagrams and photographs. Binding de luxe; black leatherette cover, genuine gold stamped; multi-colored jacket; red edges; round corners; semi-flexible covers.

This new edition contains over 100 pages more than the previous editions, of which over 100,000 were sold. It is printed in a larger type, on better paper and has better and more illustrations.

Lesson No. 1: Principles of Electricity:
History and Explanation of Electricity, etc.
Lesson No. 2: Principles of Magnetism:
The History and Explanation of Magnetism, etc.
Lesson No. 3: Dynamos, Motors, Generators, and Wiring:
Explanation of Construction and Operation of each of the above, etc.
Lesson No. 4: Principles of Wireless Telegraphy:
History and Explanation of the Wave Transmission and those concerned in the development of early radio, etc.
Lesson No. 5: Amateur Transmitting Sets and Apparatus:
Apparatus and Circuits used by Amateurs in the early days of radio telegraphy, etc.
Lesson No. 6: Transmitting Sets (Continued):
Apparatus and Circuits of Transmitting Apparatus, etc.
Lesson No. 7: Commercial Transmitting Systems:
Apparatus and their operation, etc.
Lesson No. 8: Aerials and Underwriters Installing Regulations:
Explanation of the Antenna System and Constructional details of the various types used. Official regulations, etc.
Lesson No. 9: Radio Receiving Apparatus:
Description of the Various Types of Receiving Apparatus with an explanation of their operation, etc.
Lesson No. 10: The Detector:
An explanation of the various types of detectors used for reception purposes, including circuits, etc.
Lesson No. 11: The Vacuum Tube as a Detector:
Principles of operation of the vacuum tubes, etc.
Lesson No. 12: Regenerative Receiving Set:
Description and explanation of various vacuum tube circuits, etc.
Lesson No. 13: The Vacuum Tube as an Amplifier:
Operation of the types of amplifiers as in conjunction with tuners. Loud Speakers, etc.
Lesson No. 14: Practical Vacuum Tube Circuits:
An explanation of various up-to-date Circuits used in Radio, etc.
Lesson No. 15: Super-Regenerative Receiver:
Operation of the Super-Regenerative Receiver, etc.
Lesson No. 16: Vacuum Tube Transmitter:
Vacuum Tube Transmission and Broadcasting Systems, etc.
Lesson No. 17: Radio Compass—The Wavemeter—Radio Control:
The Radio Compass. Principles and operation of the Wavemeter and Radio Control, etc.
Lesson No. 18: Learning to Operate—The Codes—The Wireless Law:
Methods of learning the International Code. Appendix: Detailed regulations of the wireless law, etc.
Lesson No. 19: History of the Development of Radio:
A progressive history of radio and those concerned in its progress, etc.
Lesson No. 20: Mathematics of Wireless Telegraphy and Appendix:
Formulas for the Calculation of Wave-length, Inductance, Capacity, and other measurements, etc.

Sent postpaid upon receipt of $2.00

If your Dealer cannot supply you, order direct from us, giving Dealer's name and address

Experimenter Publishing Co., 53 Park Place, New York, N.Y.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

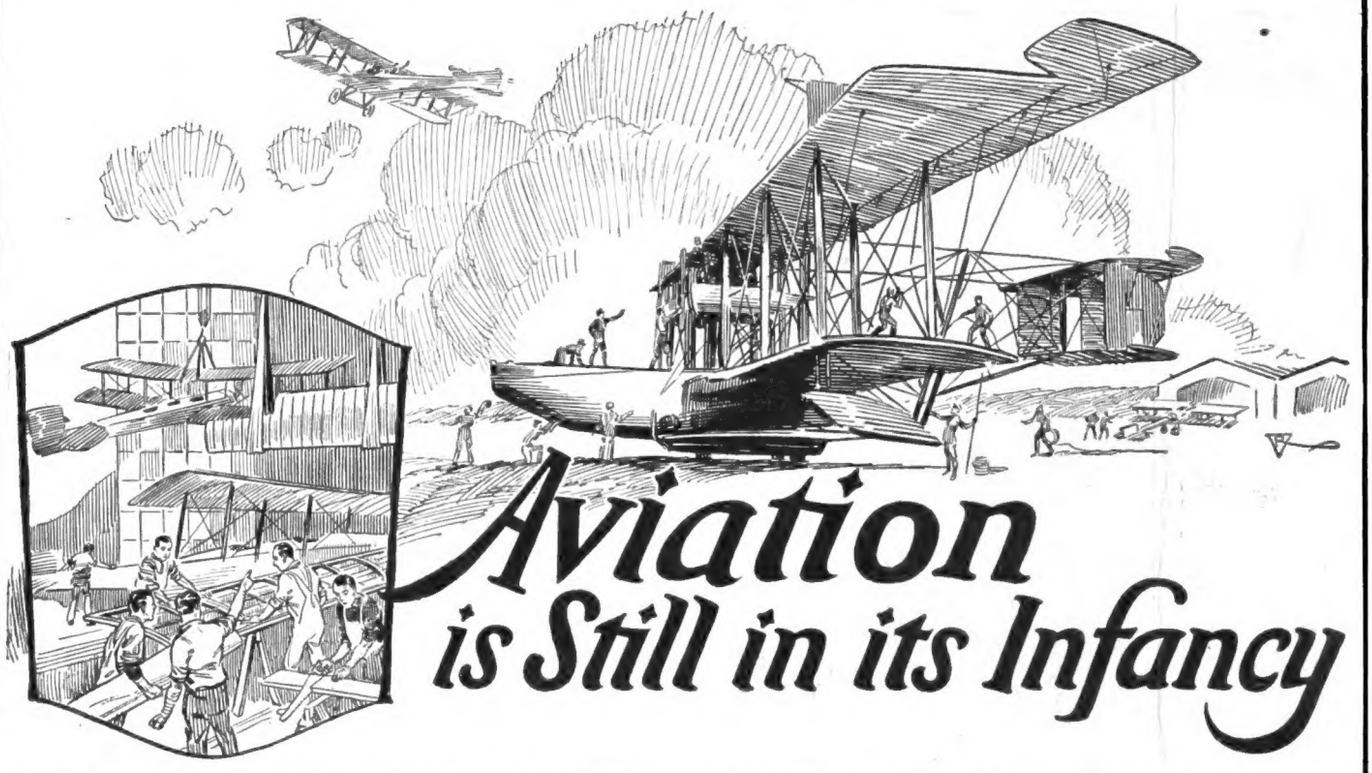

Aviation is Still in its Infancy

You all remember the rapid advancement and the unlimited opportunities the automobile industry offered to those who got in early a few years ago. To-day aviation is in the same position. The art of flying is still in its swaddling clothes. Aerial freight transportation is the only solution of our traffic ills. Airplane passenger transportation is the only means by which we can cut traveling time. The growth of the aviation industry is assured because the need for its development is so urgent.

Learn Aviation At Home

Keep right on with the work you are doing now. A little of your spare time is all you need. Our Special Course is simplified for home instructions and is endorsed by airplane manufacturers, aeronautical experts, aviators and the leading aero clubs. Any man who can read English can understand it. The Lessons are self-explanatory and are made plain as day with Blueprints, Diagrams, etc. Our Advisory Council and Instructors are behind you all the time giving you everything you must know. The entire field of Practical Aeronautics and Science of Aviation is laid right before your eyes. You are bound to succeed with this training. This means for you a man's size job with a man's size pay.

Airplane Mechanics Must Be Trained To Fill The Increased Demand

The airplane industry is going forward by leaps and bounds. Transportation—passenger carrying and mail carrying lines are being opened up everywhere. This means men—men—men! Trained men only are wanted—men who know what's what. Get ready now to make big money. The industry is calling for real red-blooded fellows—heed the call—*now* is the time to get started—while the industry is still in its infancy.

Just a Few Jobs That Will Pay $50.00 to $250.00 Per Week

Aeronautical Instructor	Aeronautical Contractor
Aeronautical Engineer	Airplane Repairman
Airplane Mechanician	Airplane Inspector
Airplane Salesman	Airplane Assembler
Airplane Builder	

Personal Instruction By Experienced Men

Men who have had actual experience give you personal attention. They select the lessons, lectures, blueprints and bulletins. They tell you things that are essential in everyday practice. Each lesson is easy to read and understand. You are bound to succeed because these men give you the full benefits of their vast experience.
Full particulars of our unique method of training are contained in our free book. Send for it to-day!

American School of Aviation
Dept. 7746 3601 Michigan Avenue, Chicago, Ill.

BIG BOOK OF OPPORTUNITIES
FREE!

Send for our big free book showing just what is going on in the Airplane Industry. It also shows what other men have done in this fascinating field and what you can do, too. It gives a list of some large manufacturers and dealers in airplanes and some of the jobs that are open to trained men. With the book we will send you a special offer that you will be glad to know about. This special offer may be withdrawn at any time without notice.

Send the coupon now and take advantage of this offer.

Mail This Coupon For FREE BOOK

AMERICAN SCHOOL OF AVIATION
Dept. 7746
3601 Michigan Ave.
Chicago

Without obligation on my part you may send me your book entitled "Opportunities in the Airplane Industry" and your SPECIAL Limited offer.

Name.....
Address.....
City..... State.....

Digitized by Google
Original from UNIVERSITY OF CHICAGO

Master Electricity By Actual Practice

The only way you can become an expert is by doing the very work under competent instructors, which you will be called upon to do later on. In other words, *learn by doing*. That is the method of the New York Electrical School.

Five minutes of actual practice properly directed is worth more to a man than years and years of book study. Indeed, Actual Practice is the only training of value, and graduates of New York Electrical School have proved themselves to be the only men that are fully qualified to satisfy EVERY demand of the Electrical Profession.

The Only Institution of the Kind in America

At this "Learn by Doing" School a man acquires the art of Electrical Drafting; the best business methods and experience in Electrical Contracting, together with the skill to install, operate and maintain all systems for producing, transmitting and using electricity. A school for Old and Young. Individual instruction.

Over 8,000 Graduates are Successful Men in the Electrical World

No previous knowledge of electricity, mechanics or mathematics is necessary to take this electrical course. You can begin the course now and by steady application prepare yourself in a short time. You will be taught by practical electrical experts with actual apparatus, under actual conditions.

The N. Y. E. S. gives a special Automobile Ignition Course as an advanced training for Auto Mechanics, Garage Men and Car Owners. The course covers completely all Systems of Ignition, Starters, Lighting and other electrical equipment on automobiles, motor boats, airplanes, etc.

Let us explain our complete courses to you in person. If you can't call, send now for 64-page book—it's FREE to you.

New York Electrical School
29 W. 17th St., New York, N. Y.

Please send FREE and without obligation to me your 64-page book.

..... NAME

..... STREET

.....CITY .....STATE

New York Electrical School

29 West 17th Street, New York

Digitized by Google

Original from UNIVERSITY OF CHICAGO

Volume XI
Whole No. 125

Science and Invention

H. GERNSBACK, EDITOR AND PUBLISHER
H. WINFIELD SECOR, ASSOCIATE EDITOR
T. O'CONOR SLOANE, Ph.D., ASSOCIATE EDITOR
Editorial and General Offices, - - - 53 Park Place, New York

SEPTEMBER
1923
No. 5

"Those Who Refuse to Go Beyond Fact Rarely Get As Far As Fact"--HUXLEY

What Good Is Astronomy?

THE average man, and there are millions like him, is apt to regard Astronomy as something unworthy of his attention. To the majority of people, even in this supposed enlightened age, the word Astronomy immediately suggests a shudder, and to most of the others it is a closed book with seven seals.

All these people may be compared to busy ants in an ant-hill who are so engrossed with their universe—the ant hill—that they never find time to see what goes on across the creek. To the ant, a distance of five miles is infinite. He is not even aware that such a thing as man, who prides himself as being the most glorious thing in creation, is in existence. Billions of ants never even see a man, and know nothing of his puny handwork.

The average man on the other hand, is either too lazy or too self-engrossed to lift his head to the stars and speculate as to what lies behind *his* mental creek. As for Astronomy, he is not at all interested in it, because it means nothing in dollars and cents to him. He knows there are such things as the sun, moon, and stars, and he is glad to leave well enough alone. If Astronomy could be expressed in dollars and cents, there would not be enough printing presses to print astronomical news. Unfortunately, so far, the money value of Astronomy has been practically nil to the public, but the time is coming when the average man will no longer see the stars as they are, but will see them as gold coins and valuable gems.

Let us therefore enumerate some of the actual everyday uses of Astronomy.

We might first mention that Astronomy has done away with a good deal of superstition that existed as late as 100 years ago. A solar eclipse four or five generations ago was a terrifying event and was looked upon as a vengeance of God, punishment of the devil, and what not. Since then, people know that the solar eclipse is caused by the moon getting between the earth and the sun. By our mathematics an eclipse can be predicted accurately to the day, hour, minute, and second, 100 or 1,000 years ahead, so that is a very natural affair to the astronomer. Astronomy, therefore, has been the cause which has delivered us from some of our superstitions.

We used to kill a lot of people sending them up in balloons that were filled with hydrogen. You will remember the many disasters of exploding air ships. All of this will be soon a thing of the past due to Astronomy, and particularly to spectrum analysis. The gas which is going to save us from death in dirigibles is called Helium. The gas is present in the sun in rather small quantities, and was unknown to earth until the spectroscope showed us its presence in the sun and now it has been found in quantities in the earth. In other words, Astronomy led us to the sun first and back to the earth in our practical quest of knowledge.

We have discovered several other gases in the sun which have not been found on earth as yet, but we know from experience that if a gas exists in the sun, it is reasonably sure that sooner or later it will be found on earth.

Our solar eclipse expeditions of what good are they? Why is so much money expended on them, just to look at the total eclipse for two or three minutes at an expense totaling tens of thousands of dollars? For one thing, there is the mysterious Corona which may be studied on the front cover of this magazine. We also know that in a total eclipse, spectrum analysis shows that there is present in this Corona, a gas termed "Coronium." So far it has not been put to any practical use because we have not been able to demonstrate its presence on earth, but we are getting there by degrees and once we have it, we shall no doubt put it to work making dollars and cents for someone. Also during a total eclipse, we expect to learn something about the mystery, about what keeps the sun hot. Good "Old Sol" has been giving out a tremendous volume of heat for at least a million years and possibly longer. So far, our puny efforts have not succeeded in unravelling the mystery as to just why the sun keeps hot. Its heat is estimated to run above 10,000 degrees C. No new fuel is added, still the titantic heat keeps up century after century, undiminished. Here is a secret that is worth, not thousands, but billions of dollars to the scientist who solves it. Suppose manufacturers could sell a little furnace or stove that would give out a tremendous heat for thousands of years, *at no cost whatsoever and without adding any fuel.* This is exactly what the sun does today, and some day we hope to wrest this secret from it, and if we do, it will be thanks to Astronomy.

In every factory where optical goods are made, such as your eye-glasses, knowledge of velocity of light is of prime importance. Its velocity was determined by means of Astronomy. So you see that even your eye-glasses have their foundation upon Astronomical knowledge.

Outside of this, however, and the dollars and cents value of Astronomy, it may be said that there is nothing more enobling and more mind-elevating than the study of Astronomy. It purifies the mind and gives you an entirely different outlook upon the world. Cease being an ant looking across a rivulet of water! EDITOR.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

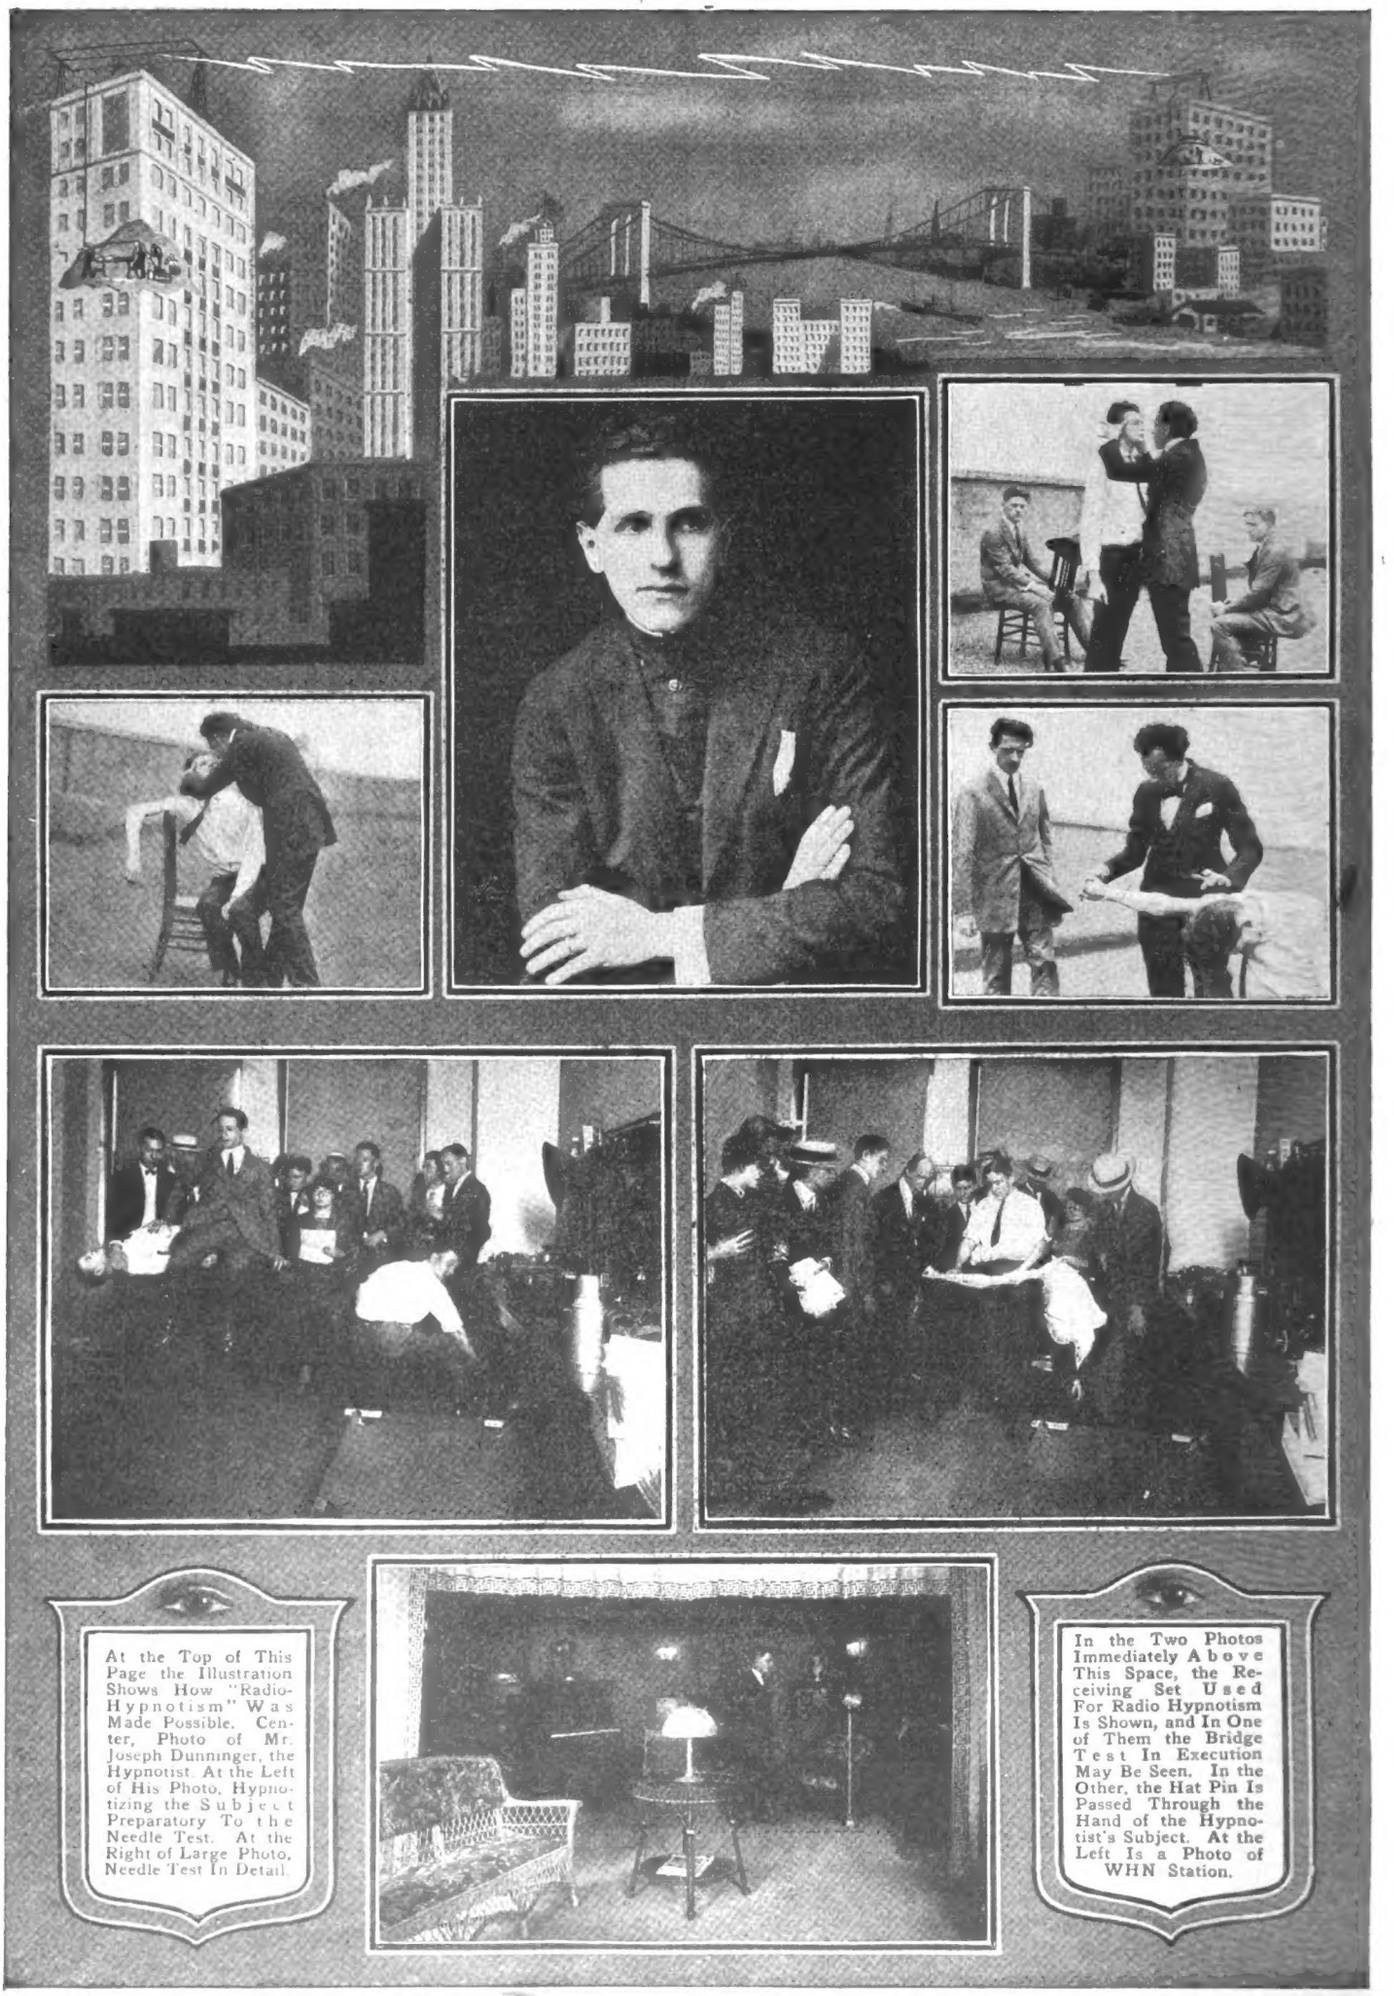

At the Top of This Page the Illustration Shows How "Radio-Hypnotism" Was Made Possible. Center, Photo of Mr. Joseph Dunninger, the Hypnotist. At the Left of His Photo, Hypnotizing the Subject Preparatory To the Needle Test. At the Right of Large Photo, Needle Test In Detail.

In the Two Photos Immediately Above This Space, the Receiving Set Used For Radio Hypnotism Is Shown, and In One of Them the Bridge Test In Execution May Be Seen. In the Other, the Hat Pin Is Passed Through the Hand of the Hypnotist's Subject. At the Left Is a Photo of WHN Station.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

Hypnotism By Radio Now Possible

By EDWARD H. LONDON

LONG distance hypnotism via radio has been successfully demonstrated by SCIENCE AND INVENTION MAGAZINE and Radio Station WHN, located at Ridgewood, L. I. Never before in the history of radio has any such attempt been made, and that it was a success all those who were present will concede, except one newspaper reporter on the staff of a miniature publication, who would not be convinced that the subject was hypnotized, even if she herself had fallen into a trance alongside of him. Nevertheless more than a dozen newspaper reporters, two medical doctors, who would not permit their names to be published, and who arrived incognito at the SCIENCE AND INVENTION offices, at least as far as the newspaper reporters were concerned, and one eminent hypnotist, besides other spectators were present at the demonstration. All of these were enthusiastic at the success of the experiment.

GETTING READY FOR THE TEST

On Saturday, July 14th, at 10.00 o'clock in the morning, station WHN, which participated in this test, to the extent of opening up the transmitting station at full power, played several test numbers, so that we could tune in for them at the laboratories of SCIENCE AND INVENTION MAGAZINE, ten miles from the station. At the Ridgewood station, Mr. Joseph Dunninger, who needs no further introduction, as he is already well-known to the readers of this publication by his series of articles on "magic" now appearing, and by the fact that he is chairman of our investigative board on spiritualistic matters, was at the station.

Leslie B. Duncan, the subject, was stationed at the SCIENCE AND INVENTION offices in the presence of the newspaper reporters, physicians, and other spectators. After a short lecture, Mr. Dunninger, speaking into the transmitter at WHN, conveyed his voice to thousands of listening ears, but to one pair which they particularly impressed, inasmuch as his voice was directed to Duncan only.

THE HYPNOTIST SPEAKS

"Duncan," the command came, "I am speaking to you only. Look directly into the horn of the loud-speaker. You see my eyes looking into yours. You see me here before you. I forbid you to move. Your eyes are watering; they are tired. Your eyelids are drooping. Your body is becoming rigid—very rigid. You will remain standing, your arms at your side."

Then his voice addressing one of the attendants said: "Now, place the subject directly in front of you, his eyes open, and see whether or not his eyelids will twitch when the flame of a match is passed rapidly before them."

This effect was attempted, but it was not entirely successful, as there was a movement of the eyes. One of the reporters stepped forward and examining Duncan, stated that his muscles were not absolutely rigid. So word was sent to Mr. Dunninger at station WHN via a private telephone wire, connecting our office with that of station WHN that Duncan should be brought out of the trance and the effect tried again. The voice then came through the loud-speaker via radio again.

FIRST ATTEMPT NON-SUCCESSFUL

"To my listeners: I have just been informed that my first experiment was not an entire success. I will try it again in a few moments. Duncan, I am now speaking to you. I want you to relax."

Duncan did. He fell limply and almost to the floor, were it not for the fact that several sprang forward to hold him. In spite of several sharp slaps across the face he could not be aroused.

DUNCAN FAILS TO RALLY

Needless to say excitement reigned supreme for the moment. Rushing to the phone, Mr. Dunninger was informed by the attendant that Duncan had not come out of the trance, although he had relaxed as commanded. A discussion followed, during which it was discovered that the command to awake had not been given, but only the command of relaxation had passed through the air.

Scientific Humor

is coming back to SCIENCE AND INVENTION with the October issue. The reason—our readers want it.

A recent circular letter addressed to a great many of our old subscribers brought out the fact that they wanted "SCIENTIFIC HUMOR" which was running for two years in SCIENCE AND INVENTION and wanted it badly. So "SCIENTIFIC HUMOR" is coming back with flying colors.

Those who remember the page on scientific fun know exactly what is wanted. We want snappy scientific jokes and clever sayings, but remember, none can be accepted unless they are connected in one way or other with Science. Look up back numbers of SCIENCE AND INVENTION for full information.

$50.00 in Prizes

Yes! We will pay for these jokes—$1 apiece for all published, and $10 for each prize winner every month.

Address all jokes to "SCIENTIFIC JOKE EDITOR," care this publication.

Again from WHN's station, came the words. "Duncan, I am your commander; I command you to awake when you receive a sharp slap on your cheek." Duncan did awake, but was not in a fit condition to undergo the second test for at least five minutes.

Bear in mind that Mr. Dunninger had not seen Duncan that morning, and there was absolutely no prearrangement of this experiment. It was an error that the first signal transmitted from station WHN was a command to relax rather than awake, and it was not until the complete resumé of commands was made, that we discovered the proper one had not been transmitted. At first we all thought that Duncan would stay in the trance and remain there until the hypnotist arrived at our offices and personally brought his subject back to consciousness.

A HUMAN BRIDGE

Five minutes later the commanding voice from WHN station again directed Duncan to stand before the loud-speaker. He was again placed in a state of catalepsy, his muscles rigid, and his shoulders on one chair and his feet on another, forming a veritable bridge upon which an individual could sit with ease. This effect is clearly shown in our photographs. Duncan promptly rallied to Mr. Dunninger's command, and after a short intermission was ready for the third test. This test without a doubt demonstrated the possibility of long distance hypnotism.

BLOODLESS AND PAINLESS NEEDLE TEST.

The subject was placed on a chair, his arm dangling over the side, and went into a state of catalepsy again at Mr. Dunninger's command, the muscles of his arm becoming perfectly rigid while those of the rest of his body were relaxed. A spot on his arm was sterilized, as was a lady's veil pin, and this was then plunged through the skin of the arm, which skin was lifted for the test. The pin punctured the skin very close to one of the superficial veins. In fact it even seemed to puncture the superficial vein and came out of the skin more than three-quarters of an inch away from its entrance. The subject did not flinch, and when the pin was withdrawn, there was no trace of blood seen coming out of the punctured marks. SCIENCE AND INVENTION did not like to conduct this last test, but the newspaper reporters were hardened. They wanted it proved that Duncan was absolutely in a hypnotic trance, and if this test, successful as it was, did not convince all of them, it convinced all but one. Undoubtedly readers of this article have already read the reports which were published in nearly every newspaper throughout the United States.

THE OBJECT OF THE TESTS

The tests proved conclusively that hypnotism may be successfully produced by radio, and that it now becomes possible for a good hypnotist, a medical doctor, to go to the nearest transmitting station and treat thousands of patients at one and the same time by means of this art. Each of the doctor's patients can have a small receiving set at home, and by listening to the voice of the radio, can be treated for insomnia with beneficial results, and by post-hypnotic suggestion for many other ailments. The treatment of chronic alcoholism and drug addicts has heretofore been successfully demonstrated by hypnotism. And why shouldn't hypnotism by radio be as successful as hypnotism by telephone? Radio has advanced to such a stage that the voice is as clear as over the telephone. With a multi-stage amplifier it is many times louder than the telephonic voice. Suppose that a very good hypnotist, internationally known, were to travel through the country giving hypnotic treatments and leaving his old patients behind in cities through which he has passed. He could then continue to administer further treatments from nearby broadcasting stations to his old patients and at the same time administer two or three personal treatments to each new subject. That this treatment may be developed more fully, and may be conducted throughout the United States at one and the same time by an efficient hypnotist, is the next step, the gap to which has already been bridged by SCIENCE AND INVENTION MAGAZINE, which has shown how this can be done. Further steps will soon be taken to develop more pronounced and lasting results following radio administered hypnotism.

This magazine wishes publicly to thank the operators and managers of Radiophone Station WHN for their kind and courteous cooperation in assisting in the first successful attempt at long-distance radio-hypnotism.

Digitized by Google

Original from UNIVERSITY OF CHICAGO

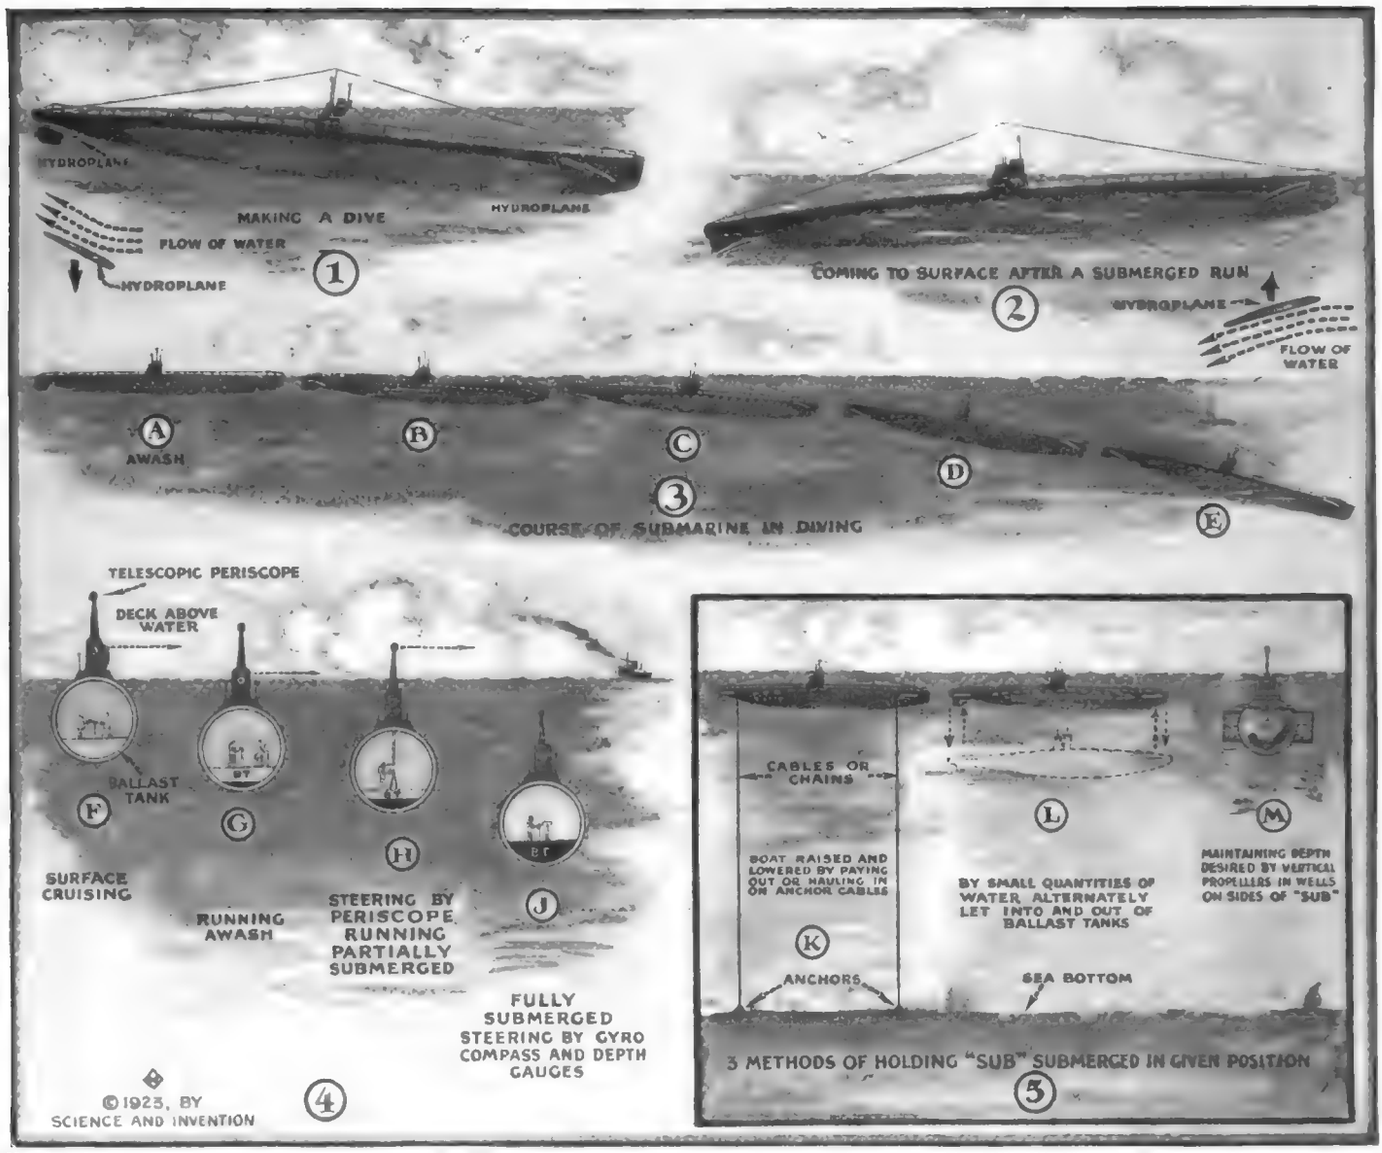

How Submarines Submerge, Travel At a Given Depth and Rise To the Surface: Fig. 1 Shows Submarine Diving At Slight Angle Usually About ½° Or Slightly More, By Depressing Horizontal Tail Rudders and Forward Hydroplanes. Fig. 2 Shows "Sub" Rising To the Surface. The Action of the Water On the Hydroplanes Is Explained In the Diagrams, With Resultant Upward and Downward Pressures. Fig. 3 Shows Successive Positions of Submarine Diving. Fig. 4 Shows Cross Section View of "Sub" and How Additional Water Is Taken Into Ballast Tanks To Reduce Buoyancy For Different Depths of Submerging. Submarines Are Made To Dive By Trimming To the "Awash" Condition, and Turning the Hydroplanes and Horizontal Tail Rudders Or Aft Hydroplanes To Proper Angles With Boat Underway. "Sub" May Navigate At Any Desired Depth By Suitable Adjustment of Water In Ballast Tanks and Hydroplanes. Fig. 5 Shows Three Ways of Maintaining "Sub" At Any Fixed Depth In Stationary Position—A, By Sinking Anchors and Taking Out Or Hauling In On Anchor Cables; B, By Alternately Blowing Out and Taking In Small Quantities of Water In Ballast Or Trim Tanks; and C, By Utilizing Vertical Propellers In Wells Extending From Sides of Hull, Sufficient Upward Or Downward Thrust Being Obtained As Required, By Varying the Speed and Direction of the Propellers.

How Submarines Dive and Rise

By IRWIN R. FAHRLAENDER

LATE OF THE U. S. NAVY SUBMARINE DIVISION

A SUBMARINE, in the most general acceptance of the term, is a vessel designed to operate at pleasure on the surface or submerged. All submarines involve the following principles:

Surface buoyancy, or displacement is destroyed by the admission of water ballast into specially constructed tanks called ballast tanks. The tanks are so located and of such size that the boat will naturally submerge on an even keel, and when these tanks are full the boat will have a very small percentage of positive buoyancy left, as about 75 per cent of her buoyancy is destroyed when fully flooding the main ballast tanks.

HOW A SUBMARINE DIVES

I will try to describe how a submarine makes a stationary dive.

We are running on the surface on the main engines when the following orders are given by the commissioned officer:

"Rig for diving."

Everything about the decks is secured, lines stowed, deck locker and gun secured, the colors taken down, the diving flag put up, and all navigating instruments are sent below.

All hands except the commanding officer and quartermaster, go below to their stations and see that everything is in readiness by actual test.

All hatches are closed, except the conning tower hatchway.

The next orders are:

"Stations for trimming down,"

"Silence in the boat."

Everybody stands by for further orders.

The commissioned officer stops engines, and goes below, also the quartermasters.

Reports come in from all diving stations. *"Ready forward"; "ready aft,"* etc., are further orders.

"Flood M. B. T." (M. B. T. means main ballast tanks.)

This last named operation occupies less than a minute, when the said tanks are reported full; the air in the tanks has been expelled and replaced by water.

But still we are not ready to run. We still have about 25 per cent of buoyancy which must be cut down to enable us to handle the boat with ease as we flood our auxiliary and regulator tanks, which can be so regulated that the boat will be perfectly balanced at what is called neutral buoyancy. In other words, the boat now at neutral buoyancy is, as it were, suspended in a sort of indifferent buoyancy. In fact, if it were possible for a man to get outside of and

(*Continued on page* 491)

Digitized by Google

Original from UNIVERSITY OF CHICAGO

Important Announcement!

THE October issue of SCIENCE AND INVENTION will witness an important and far-reaching innovation in the magazine field.

IN order to give our readers greater value for their money, the October issue, and subsequent issues of SCIENCE AND INVENTION, will contain almost *three times as much matter* as has been published in any previous issue.

THE editorial policy of SCIENCE AND INVENTION remains unchanged. The same material, only *three times as much of it in an entirely new form*, will be presented to our readers.

INCIDENTALLY, SCIENCE AND INVENTION will appear in a new make-up which will make its reading far more fascinating and interesting than it has ever been in the past.

THE EDITORS

Digitized by Google
Original from UNIVERSITY OF CHICAGO

What We Die Of

THE past year was the healthiest one in the history of the United States and Canada of any save one, the exception being 1921, and the margin between the two years is insignificantly small. The Metropolitan Life Insurance Company, who issue a statistical bulletin, in which they carefully record the mortality figures of their policy holders, have found that the death rate of these millions of insured persons was 8.8 per thousand lives in 1922, and 8.7 per thousand lives in 1921. These figures differ from those issued by the Government, but the general proportion is maintained. The reason that this year fell back slightly was because of the influenza outbreak in the early months of 1922, which made the record higher than that in 1921, although the latter half of the year showed the best health record ever made during the past fifteen or twenty years.

There was a sharp decline in deaths from tuberculosis, which eleven years ago was way in the lead as a cause of mortality. From this ranking position it has been displaced, so that now it is second in importance to organic heart diseases. The decline in deaths from tuberculosis was not so marked among white individuals as among colored persons. Typhoid fever was lower among insured wage-earners in 1922, and the communicable diseases of children, such as diphtheria, scarlet fever and whooping cough, show a lower death-rate during the year, although the measles death-rate rose slightly. The diphtheria death-rate was the lowest recorded in the past eleven years among insured wage-earners, and the same is true of the whooping cough. The scarlet fever rate was lower than in the year 1919, 1920 or 1921. Diarrheal conditions likewise took a marked slump, and there were fewer deaths this year than in former years from accidents not specified in the following sentence, drowning, burns, suicides and homicides. Deaths from drowning and burning have shown a downward trend ever since 1911. Influenza, pneumonia, organic diseases of the heart, diabetes, automobile accidents, and machinery accidents increased, the mortality statistics showing that 1922 was not as favorable as 1921 for these diseases and accidents. The upward movement of heart disease mortality occurred beyond the forty-fifth year, while in children and in adolescents the rating was normal. Cerebral hemorrhages were slightly higher this year than last year. The diabetes rate increased ten per cent during 1922, the highest recorded in twelve years, and alcoholism due to ordinary liquors, not to wood alcohol poisoning, rose as indicated by the statistical bulletin above referred to, from .9 per one hundred thousand to 2.1, or an increase of one hundred and thirty-three per cent. This is the highest death rate recorded for alcoholism since 1917, but it is still much lower than the rates in the years prior to 1918. These figures would indicate, therefore, that prohibition was of value in causing a marked decrease in the number of deaths due to alcoholism, because from 1917 to 1920 there was a downward trend in such mortality. Seventy-one individuals died of wood alcohol poisoning in 1921, but the record of victims of this drug have not been tabulated for 1922 up to the present time. Cirrhosis of the liver also declined. Machinery accidents recorded a sixty per cent increase.

And now we have a challenge to the instinct of self-preservation of the American and Canadian populations. During 1922 the number of deaths caused by automobile accidents increased 10.7 per cent over the 1921 figure. The 1922 record caused the loss of lives at nearly six times the rate of 1911, and (you may write this on your cuff) forty-eight per cent of the deaths were of children under fifteen years of age.

In the general population for the registration area, exclusive of Hawaii, we find (the figures of which are given on our drawing) that the death-rate for 1920 was lower than for any year since the publication of annual reports in three of the items listed. Remember that now we are talking about the general population, not insured wage-earners alone which occupied our attention in the previous part of this article. These three are typhoid fever, diarrhea enteritis, and tuberculosis. On the other hand, the rate from diphtheria, croup and cancer is higher.

Very interesting information is given by the John Wiley publication, "Vital Statistics," by George Chandler Whipple, a standard text work on the science of demography. It would be well for anyone interested in living long to read this most excellent work. We find that the ideal family, according to the author in question, would consist of a father, a mother, three children and an occasional grandfather, grandmother, aunt or uncle. As the average number of persons per family in the United States is only 4.3, it is evident that our nation's families are much smaller than the ideal. It is surprising to note the number of persons about .14 per cent who really do not know their own age, and also that the population of the United States is increasing in spite of the rather difficult times. For instance, in 1918 there were seventy-three deaths for each one hundred births, but this was a high rate of mortality, effected by the influenza epidemic, which reigned at that time. In 1919 there were only fifty-eight deaths per one hundred births in the United States. In England the figures were ninety-two and seventy-three for the two years, respectively, whereas in Vienna and France the death-rate was appallingly high. In the non-invaded portions of France there were one hundred and ninety-eight deaths per one hundred births for the year 1918, which means that the population of France is decreasing rapidly, and in Vienna two hundred and twenty-nine and one hundred and sixty-two were the figures, respectively, for the two years mentioned per one hundred births.

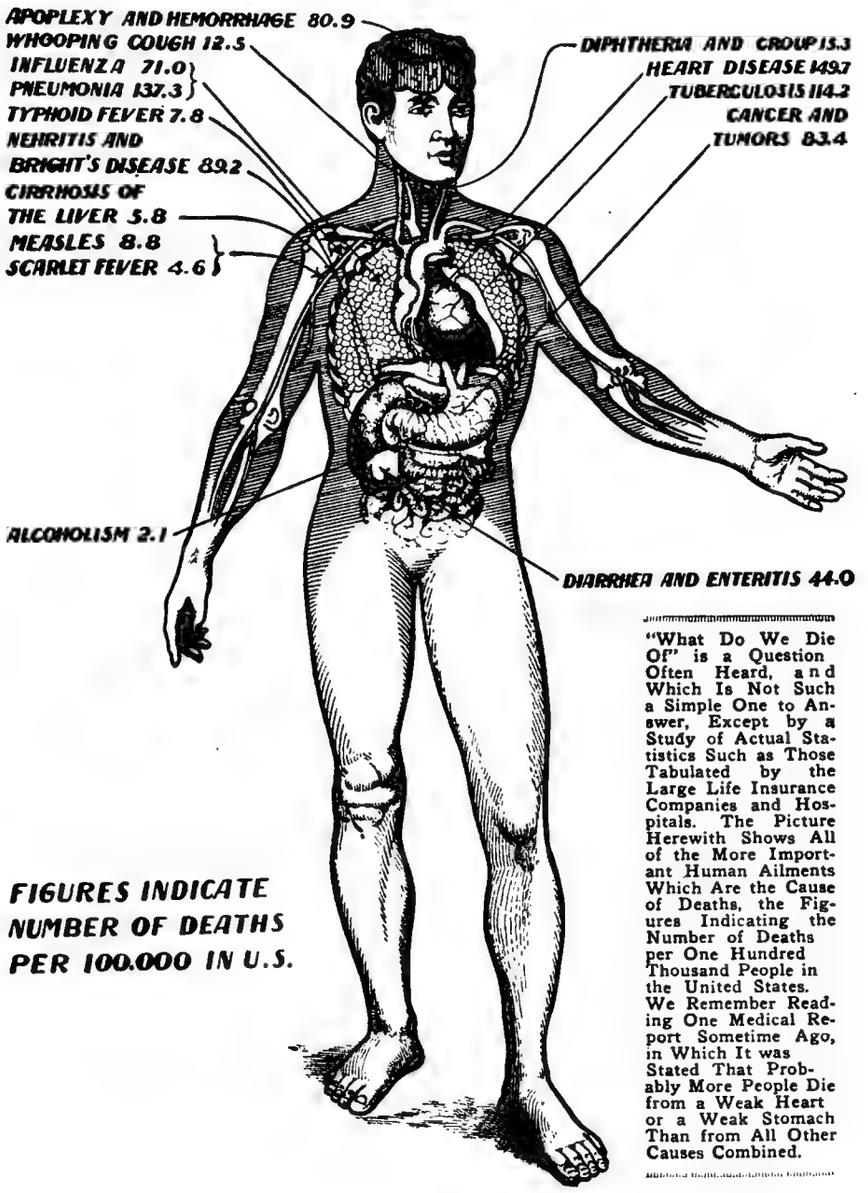

"What Do We Die Of" is a Question Often Heard, and Which Is Not Such a Simple One to Answer, Except by a Study of Actual Statistics Such as Those Tabulated by the Large Life Insurance Companies and Hospitals. The Picture Herewith Shows All of the More Important Human Ailments Which Are the Cause of Deaths, the Figures Indicating the Number of Deaths per One Hundred Thousand People in the United States. We Remember Reading One Medical Report Sometime Ago, in Which It was Stated That Probably More People Die from a Weak Heart or a Weak Stomach Than from All Other Causes Combined.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

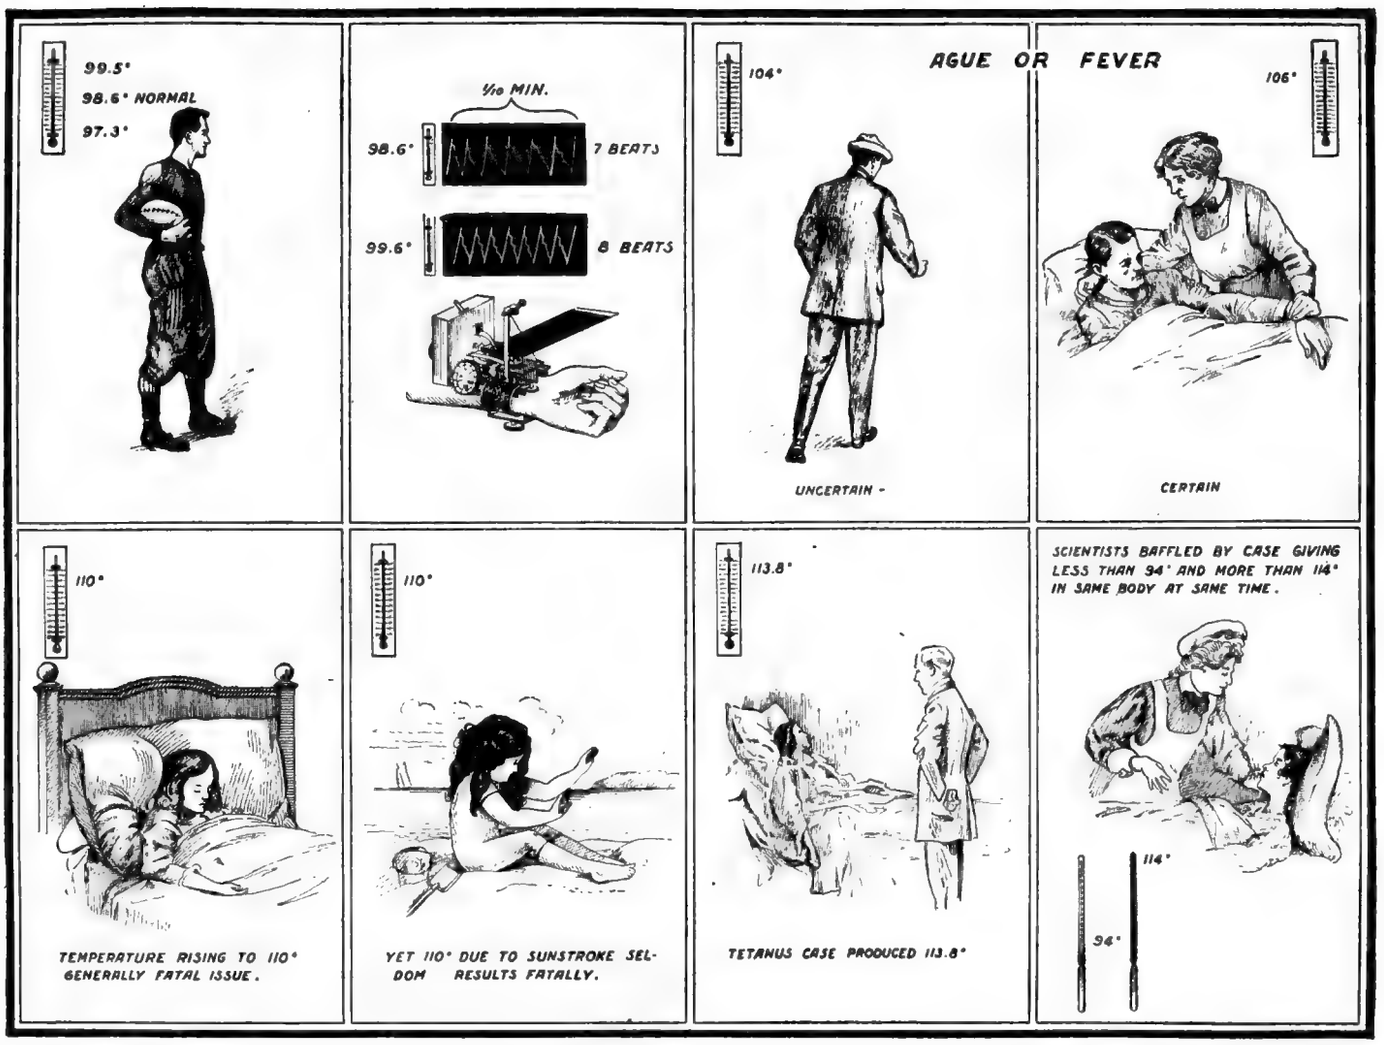

The Body Has a Normal Temperature of 98.6° Which May Vary Between 97.3° and 99.5° F. With An Increase of Temperature of 1°, the Pulse Shows Ten Beats More Each Minute, As Indicated In the Second Illustration In the Top Row. A Person Can Walk Around In Seeming Health With a Temperature of 104, But When the Temperature Reaches 106, He Invariably Finds It Necessary To Go To Bed. In the Lower Row We Find That a Temperature of 110° Will Generally Result Fatally, Yet the Same Temperature Due To Sunstroke Seldom Causes Death. Very High Temperatures Have Been Recorded. A Tetanus Case Developed 113.8° Before the Patient Succumbed, Whereas a Patient Having Various Temperatures In Different Sections of the Body, Registering More Than 114° and Less Than 94°, At the Same Time, Is Still Alive.

What Temperature Can We Stand?

By JOSEPH H. KRAUS

STAFF MEDICAL EXPERT

NO doubt you have all read of the sudden rise to fame of Miss Evelyn Lyons, the "Michigan Marvel," from Escanaba, Michigan. Miss Lyons was called "the girl with a temperature of 114°." On May 7th physicians were baffled with the abnormally high temperature which a thermometer registered, when held under the arm by the girl. The ordinary clinical thermometer will read to 110°, and is not graduated beyond that point, although it will require a temperature of approximately 114° to cause the mercury to reach the end of the capillary tube. When Miss Lyons placed the thermometer under her arm it lasted a few seconds, and was then cracked by the expanding mercury. The Weather Bureau had to come to the physician's assistance, furnishing longer range thermometers for the tests.

Medical men from all over the country were making guesses as to why her fever was so high. She had an unusually good appetite, was loath to remain in bed, and reports would have it that she even ran out and lay down in a snow bank in order to cool off. The proper cooling procedure would have been for Papa Lyons to have turned young Miss Evelyn over on his knee and administered a little additional heat, because Evelyn was found fooling the best physicians in the country by means of an ordinary hot water bottle. The miniature hot water bottle was concealed by the patient, being held under her arm, so physicians, who had figured that pressure on the thermal center, or that peritonitis, or that a thousand and one other causes were responsible for the fever, returned home baffled.

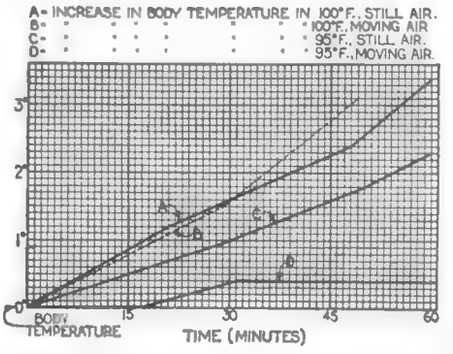

Each of the Curves On the Above Chart Indicates the Increase In Body Temperature When the Patient Is Placed In a Room Containing Still Air of a High Temperature, Or Moving Air of the Same Temperature. The Normal Temperature Is Taken As Zero On the Graph.

SIGNIFICANCE OF HIGH TEMPERATURE

One often desires to determine what the effects of high temperatures in the body or on the body would actually be. The normal temperature of the human body is 98.6° F., which varies a few tenths in either direction in different climates. Should there be a persistent elevation or depression in the temperatures above 99.5 or below 97.3, both in degrees F., one may be quite certain that a diseased condition is present. The average temperature of the human body is 1° higher in the tropics than in temperate regions. This increase of 1° generally increases the pulse beat, so that the pulse averages ten more beats per minute.

In cases of ague, the temperature of the body begins to rise and after the disease has been practically cured, this temperature is still found to be quite high. As long as it remains above normal, the patient is not entirely cured.

Supposing that a person of good habits and who only a few hours ago was perfectly healthy, develops a temperature of 104°F. It is an almost positive sign that he has developed an attack of ephemeral fever, or that ague is coming on. This temperature may further increase to 106°

(*Continued on page* 495)

Digitized by Google
Original from UNIVERSITY OF CHICAGO

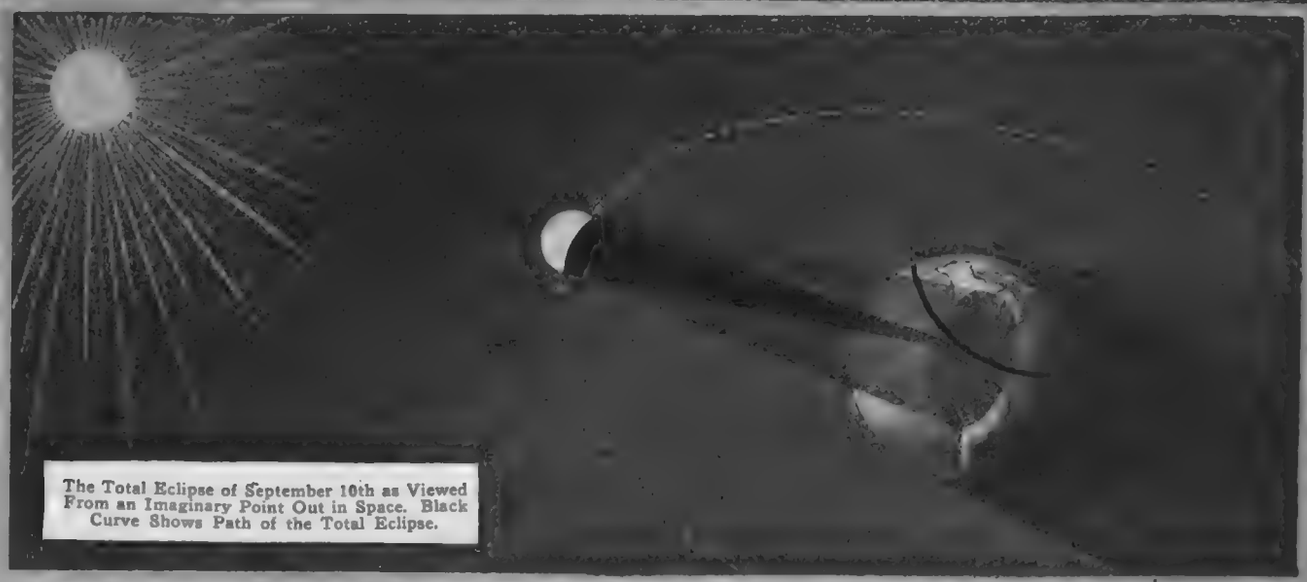

The Total Eclipse of September 10th as Viewed From an Imaginary Point Out in Space. Black Curve Shows Path of the Total Eclipse.

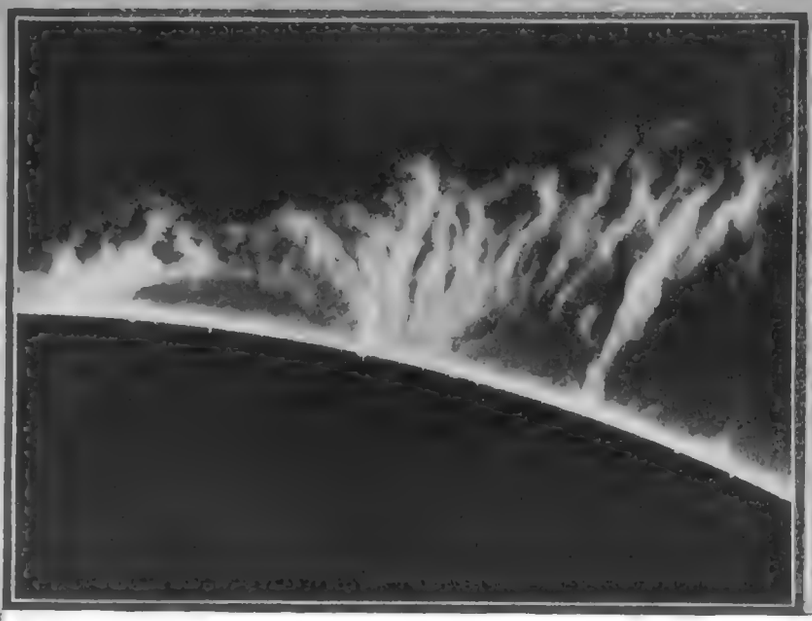

Solar Prominences of Incandescent Hydrogen 80,000 Miles High Rising From the Chromosphere. It Is Now Possible to Photograph These Great Eruptive Prominences Without the Aid of a Total Eclipse. The Dark Disk in This Photograph Is NOT the Moon, and This Was NOT Taken at Time of Total Eclipse, Though Such May Appear to be the Case.

As the Sun Will Look on September 10th in Certain Parts of This Country. This Is a Partial Eclipse. In Other Words, the Disk of the Moon Does Not Cover the Entire Sun.

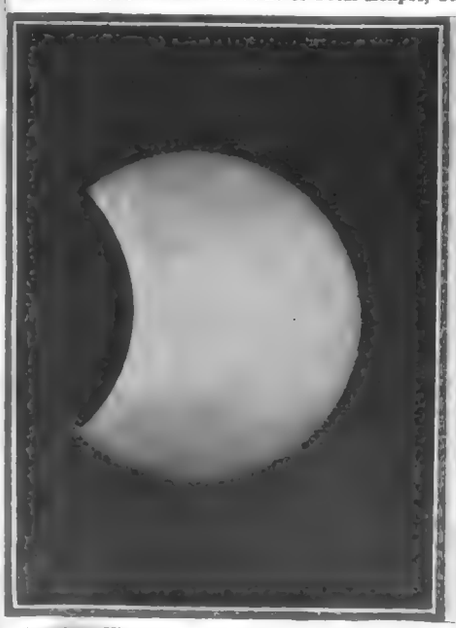

Another View of the Partial Eclipse Which Is Even Less Than Last Illustration.

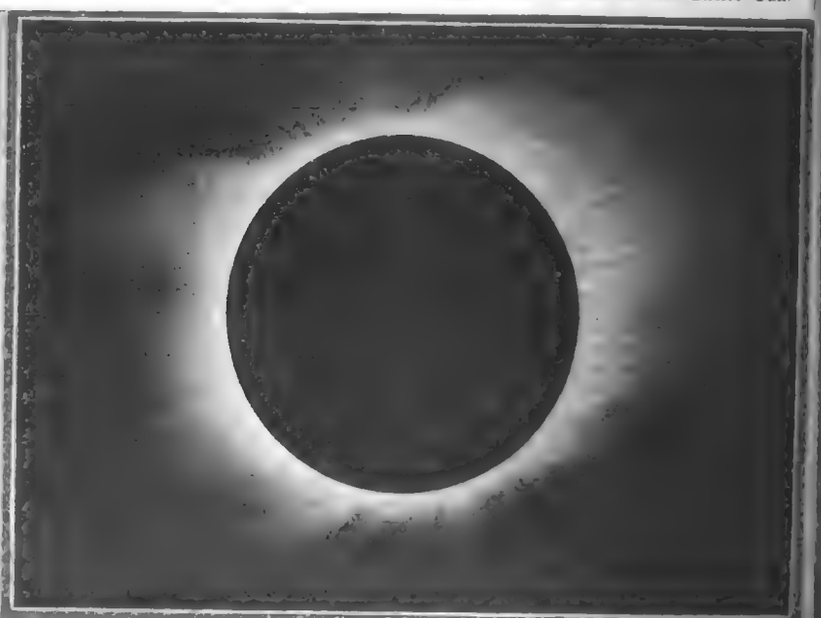

Total Eclipse of the Sun May 28th, 1900, Photographed by Yerkes. The White Streamers Are the Corona. Note Short Polar Streamers and Bottom.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

Popular Astronomy

By ISABEL M. LEWIS, M.A.

OF THE U. S. NAVAL OBSERVATORY

The Total Solar Eclipse of Sept. 10th Visible in the United States and Mexico

UPON the tenth of September the United States will be visited by a total eclipse of the sun, the first to be visible in this country since the path of totality of the eclipse of June 8, 1918, crossed diagonally from Washington to Florida. To be sure, the path of totality of the coming eclipse will not much more than graze our shores in Southern California, but it will be at the most favorable part of its course when the sun is high in the heavens early in the afternoon and when the duration of the total phase is near its maximum value.

The Santa Barbara Islands, off the coast of Southern California, lie directly in the path of total eclipse, the island of San Clemente being on the central line. Point Concepcion and San Diego on the mainland are also well within the path of totality. The Mt. Wilson Observatory lies only thirty miles or so outside of the shadow path and ninety-eight and one-half per cent of the sun's diameter will be covered by the lunar disk at that point at the time of greatest obscuration. Plans are being made to observe the eclipse on Mt. Wilson as well as within the path of total eclipse, and it is expected that some interesting results may be obtained with the aid of the powerful astronomical equipment of this observatory which is second to none in the world. It is hoped that the fifty-foot interferometer may be completed in time for use at this eclipse.

TIME DURATION OF ECLIPSE

At San Clemente Island the total phase of the eclipse begins at about 12:56 p. m., Pacific Standard Time, and the duration of the total phase will be 3m 36s, which is within one second of the longest duration at any point on the central line. This compares very favorably with the scant two minutes, at the most, afforded observers of the 1918 eclipse. The Lick Observatory expedition to Wallal, Australia, which so successfully observed the eclipse of last September and obtained such striking confirmation of the Einstein prediction, was favored with a duration of a little over five minutes. The duration for the coming eclipse is about that of the average total eclipse. The greatest possible duration of a total eclipse is 7m. 58s. and this occurs only under very exceptional circumstances which are rarely fulfilled.

MEXICO IDEAL SPOT TO VIEW ECLIPSE

There are many excellent points of vantage for the observation of this eclipse not only among the Santa Barbara Islands and in the vicinity of San Diego, but also in Mexico. Here the shadow path passes over Lower California and across the mainland from the Gulf of California to Yucatan. The Mexican National Government, the Council of Mexico City, the Governor of San Luis Potosi, the Director of the National Observatory at Tacubaya, Prof. Gallo and the Mexican National Railways have offered many courtesies and offers of assistance to astronomers of other countries who are planning to observe the eclipse in Mexico. All necessities of expeditions going to Berrendo, a point on the central line midway between Cuencame and Tampico, will be provided by the Governor of San Luis Obispo and all facilities will be granted to the visitors. The National Railways are also offering a discount of fifty per cent to Mexico City and other points where the eclipse will be observed.

The Lick Observatory Expedition will locate in the neighborhood of Ensenada, Lower California, with an extensive equipment, though no further attempts will be made to obtain plates to test the Einstein effect, owing to the nearly perfect agreement between observation and theory that was obtained by this expedition last September at Wallal, Australia.

Certain other expeditions will attempt to obtain photographs of the star-field surrounding the sun, however, for the purpose of detecting this Einstein effect, due to the bending of the rays of light from the stars upon passing near the sun which causes the star images to appear displaced on the photographic plates from the positions they would normally occupy, not only away from the sun, but by an amount varying with distance from it.

An expedition from Germany will observe the eclipse in Mexico at the invitation of the Mexican government and the test of the Einstein effect will be part of the program of observation.

At Cuencame, Mexico, there will be an expedition from the Sproul Observatory of Swathmore College, which is planning to obtain plates to test the Einstein effect, as well as to photograph the solar corona with lenses of 65 feet, 104 inches and 38 inches, respectively, to photograph the flash spectrum, which appears just preceding and following totality, and to test the corona for rotation with the interferometer.

The Mexican Government will send out two expeditions, one to occupy a station near Cuencame and the other a station at Berrendo. Photographs and drawings of the corona will be made and moving pictures of the eclipse will also be taken.

An expedition from the Steward Observatory of the University of Arizona under the leadership of Director A. E. Douglass will locate on the central line south of Hermosillo in Mexico. Amateur observers are also showing great interest in this eclipse and a group of Arizona amateurs are planning a pilgrimage into the wilds of the Sonora desert to the central line by automobile, a distance of 160 miles. Other amateurs interested in observing the eclipse are invited to join the expedition which will start from Douglas on the border. The equipment will consist of whatever astronomical instruments may be obtainable. The artists of the expedition may try their skill in making drawings of the coronal streamers and many of the details of form and structure which may be caught even better by the human eye than by the photographic plate. All members of the expedition, if the weather permits, will be afforded a view of one of the grandest spectacles that nature has to offer.

On Catalina Island there will be several expeditions. The Yerkes Observatory expedition will be stationed here with an extensive equipment, and also an expedition from the Washburn Observatory of the University of Wisconsin which will measure the brightness of the corona by means of the photo-electric cell. The Goodsell Observa-

(*Continued on page* 484)

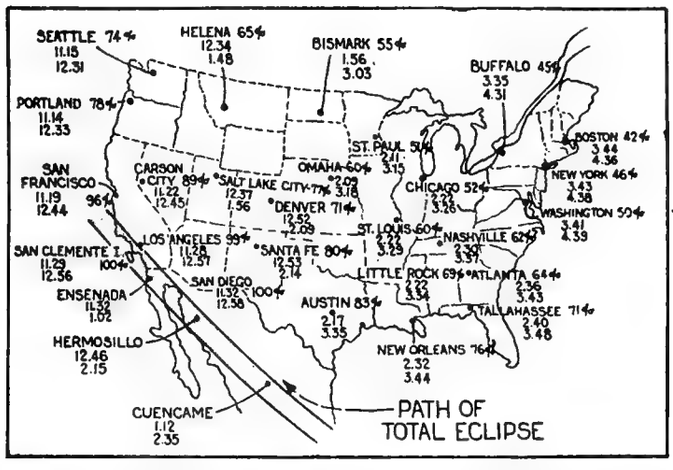

Map Showing Path of Total Eclipse in United States and Mexico and Local Standard Times of Beginning of Eclipse and Greatest Eclipse With Per Cent of Obscuration for Various Cities in the United States.

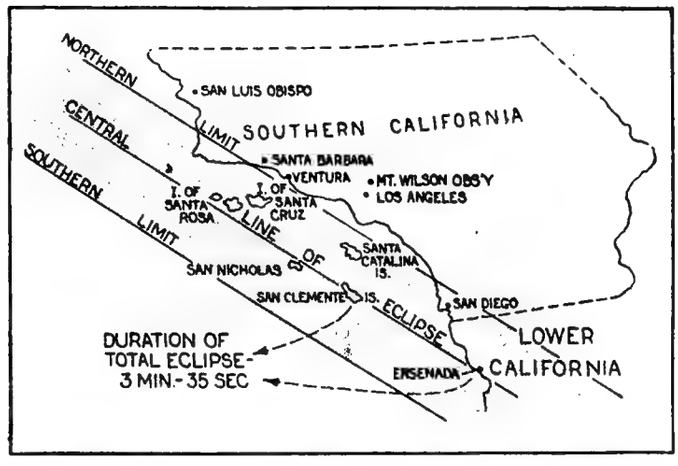

Map Showing Path of Total Eclipse Over Santa Barbara Islands, and Southern and Lower California. Most Favorable Points Will Probably Be Santa Catalina Island and Vicinity of Ensenada.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

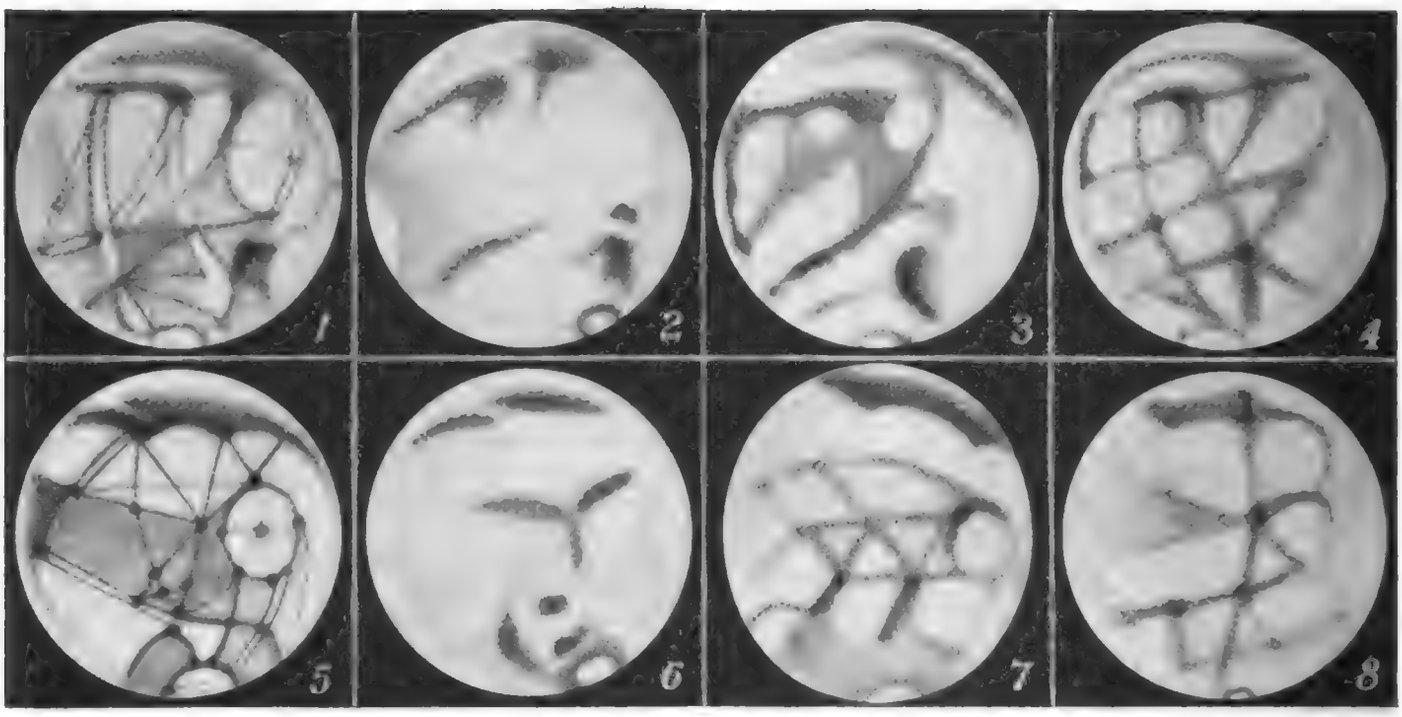

The Planet Mars As It Appears Through the Telescope When Viewed By the Observer. These Are Not Photographs of the Planet Mars Showing the Canals, For the Reason That It Is Almost Impossible To Secure Good Photographs of the Very Fine Line Net-Work of the Planet's Surface. The Reason Is Due To the Earth's Atmosphere, Which Tends To Blur the Fine Spider-Web Structure That Covers the Face of Mars. We Show Drawings Made By Different Observers. Comparisons Were Made of a Number and In Many Cases the Drawings Coincided Perfectly, Although Made By Observers Thousands of Miles Apart. It Is Professor Pickering's Belief That These Canals Are Not Artificial, But Can Be Explained By Natural Means.

The Planet Mars

By Prof. WILLIAM H. PICKERING

HARVARD COLLEGE OBSERVATORY, MANDEVILLE, JAMAICA, B. W. I.

THE year of Mars is about twice as long as that of our Earth, consequently in our path around the Sun we are continually overtaking it in a period of a little more than two years. At such times, since the path of the planet is quite eccentric, we occasionally pass comparatively near to it, that is to say within 35,000,000 miles, which seems near in astronomy. This will happen on August 22d of next year, when we shall be nearer to Mars than has been the case for over 120 years. Nor shall we be as near again during the present century. The planet will then appear very large and red in the sky, so that anyone can easily recognize it. But it is not merely that it will be nearer to us than usual next year, but also that it will be near us for a very long time, which is much more important. We therefore hope to secure many interesting observations of it. The season on Mars will be the middle of November for its northern hemisphere, or late spring for its southern. The south pole of the planet will therefore be turned towards the Earth, and we shall be able to study the whole of the southern hemisphere to great advantage.

The drawings illustrating this article were made in 1920, when the northern hemisphere was turned towards us, and they show that hemisphere very clearly. Like all planetary drawings north is placed at the bottom of the picture, and the northern snow cap is distinctly shown in each of them, thus locating the pole of the planet. The Martian month was late July and early August, though most of the drawings were made in our April and May. At that time the Earth was once and a half as far from Mars as we shall be next year.

HOW MAPS OF MARS WERE MADE

These drawings were all made by expert observers belonging to the international society devoted to the study of Mars. This society includes in its membership all of the best known planetary astronomers throughout the world. Under each original drawing is the name of the observer, and the longitude of the planet's central meridian at the time that the drawing was made. Referring to the drawings individually, it may be said that Dr. Maggini believes that he should draw everything that he sees, or thinks that he sees. Some of this detail is so faint that in order to show it at all he has to greatly exaggerate its density, so that, as he himself admits, his drawings for this reason really do not look like the planet, but are more nearly analogous to a map. The other observers insist on drawing only those things of which they are absolutely sure, feeling that it is better to omit some real detail than to draw something else that is not there. Since the drawings were not all made on the same night, or even during the same week, and since the surface of Mars is continually changing, we should not expect them to be all exactly alike. At the same time they should bear a very close resemblance to one another

WILLIAM HENRY PICKERING is one of the best known astronomers in the world today. He is an expert on the subject of Mars, and we are sure that our readers will enjoy this specially written article by Professor Pickering. He is a Fellow of the American Academy, a member of numerous astronomical societies, and he holds the order of the Chevalier Saint James of Portugal. We are fortunate indeed in having procured this timely and exceptional article for SCIENCE AND INVENTION, by so prominent and brilliant an investigator of stellar mysteries.—EDITOR.

These facts will explain why there are two distinct schools of observers of Mars—the more radical, and the more conservative. Which is right only the future will decide. Dr. Maggini's drawings show innumerable lakes, and several of the famous double canals of Mars. That some of these canals exist as canals there is no manner of doubt. The only question is as to whether their sides are darker than their middles. Most of the observers apparently think not. It is hoped that this matter may be definitely decided next year.

SURFACE CONDITIONS ON MARS

We will now discuss some of the better ascertained facts relating to the surface conditions on the planet. The most important one, on which most of the others depend, is that the force of gravity there is only two-fifths as great as it is on the Earth. A man weighing 150 pounds here would weigh but 60 pounds if transported to Mars. Consequently the density of its atmosphere is much less than ours, probably about one-quarter as great. Also there is very much less water on the planet, hardly as much as would be contained in one of our great lakes. There are no permanent water areas as with us, and water is only seen in the liquid form temporarily, at the edges of the melting polar caps. Those large dark areas on the planet which temporarily turn a bright blue, indicate, it would seem, like the green maria, merely a process of vegetation.

(*Continued on page* 482)

Digitized by Google Original from UNIVERSITY OF CHICAGO

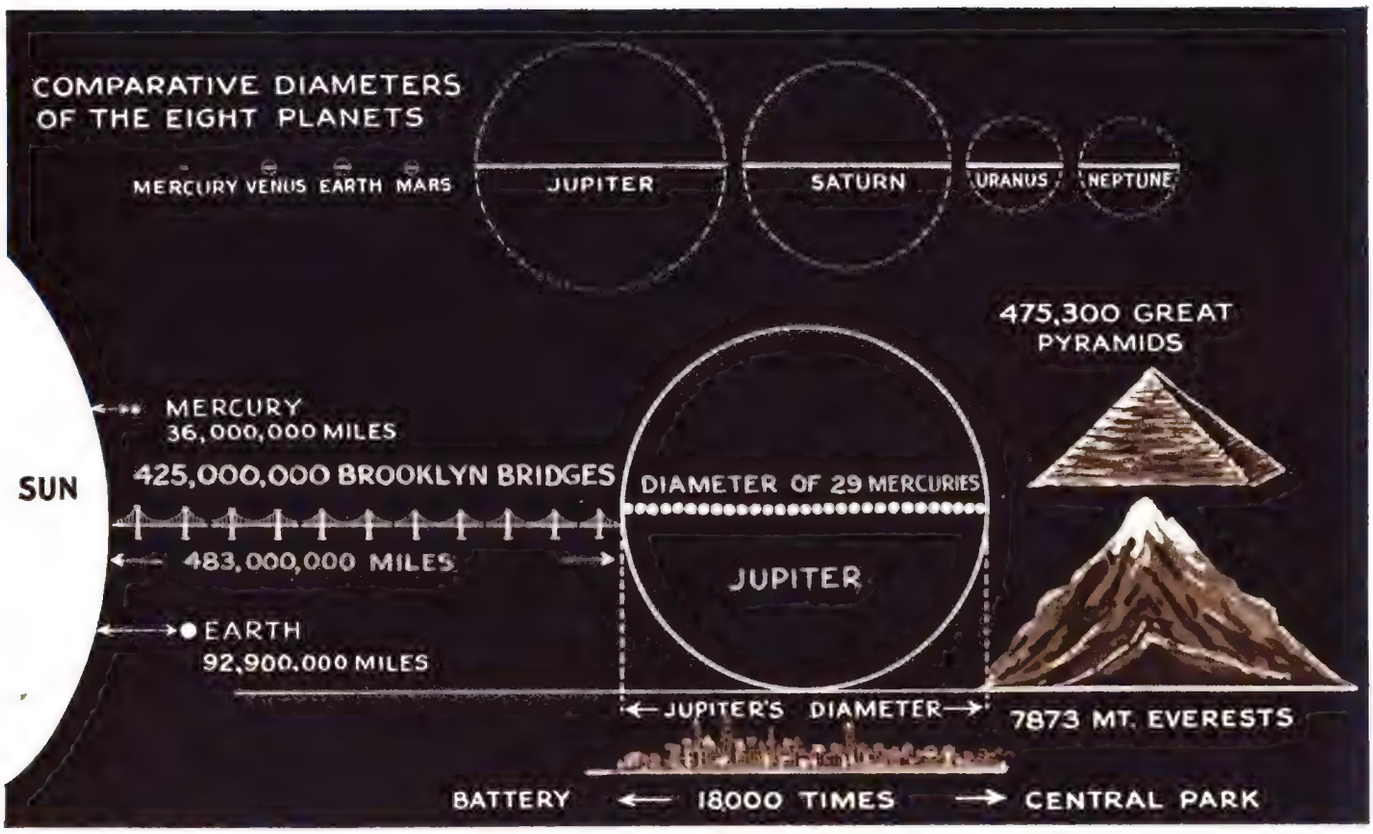

The Chart Above Shows In a Striking Manner the Comparative Sizes of the Eight Planets Constituting the Solar System. Mercury Is the Smallest of the Planets, While Jupiter Is the Largest, Having a Diameter Equivalent to Twenty-nine Mercuries. Jupiter's Diameter Is 18,000 Times the Distance From the Battery to Central Park, N. Y. C., and It Will Need Over 400 Million Brooklyn Bridges to Bridge the Gap Between Jupiter and the Sun.

The Largest and the Smallest Planets

By CHARLES NEVERS HOLMES

EIGHT planets constitute the planetary membership of our Solar System. Of course, these planets are Mercury, Venus, Earth, Mars, Jupiter, Saturn, Uranus and Neptune. There may exist other planets, besides these eight, buf astronomers have not as yet discovered a ninth planet. In order of respective size, these eight planets are Jupiter, Saturn, Neptune, Uranus, Earth, Venus, Mars and Mercury.

Accordingly, the largest planet of our Solar System is Jupiter, the smallest is Mercury. Both Jupiter and Mercury vary in their distances from the Sun and from our Earth. Jupiter revolves at a mean distance of 483,000,000 miles from the Sun; it may approach as near as 370,000,000 miles to our World or recede as far as 600,000,000 miles from us. Its mean distance from the Sun is, therefore, not quite 1/6th that of Neptune, the farthest planet from our Sun. Mercury is not only the smallest of the eight planets but it is also the nearest to the Sun. It revolves at a mean distance of 36,000,000 miles from the Sun, and its distance to our Earth varies from 50,000,000 to 136,000,000 miles. At its nearest distance to us, Mercury approximates 1/7th of Jupiter's nearest distance to us.

The "year" of the planet Jupiter is almost twelve times as long as our Earth's. The "year" of Mercury only about 1/4th that of the World's. As we well know, our Earth's year is approximately 365¼ days of length. The reason for Jupiter's longer year and Mercury's shorter year is owing to Jupiter's longer orbit and Mercury's shorter orbit around the Sun and to their relative speeds. Around our Sun, the latter planet speeds with a velocity of 23 to 35 miles per second, the former planet with a velocity of only 8 miles per second.

The density or solidity of Jupiter is estimated to be even a little less than that of our Sun. There have been a number of estimates respecting the density of Mercury. Whereas Jupiter's solidity approximates only about one-quarter that of our Earth, Mercury's density has been estimated from 85/100ths of the terrestrial density to a density comparable with our Earth's.. Now, our Moon is almost 2/3rds as solid as our Earth. In other words, our Earth's density is about 5½ times that of water, Jupiter's density a little greater than that of water, whilst Mercury's has been estimated, upwards, from 4 7/10ths times the density of water.

All the eight planets vary respecting the so-called weight of bodies at their surfaces. The weight of a body on the planet Jupiter is about 2 65/100ths times the weight of such a body, were it weighed upon our Earth's surface. That is, one of us who weighs 150 pounds here, would, were he transported to Jupiter's surface, weigh almost 400 pounds. Of course, Mercury is smaller than either Jupiter or our World, so that we should expect a 150-pound body to weigh less there than what it would on either of the other planets. A good estimate would perhaps be about 60 pounds. Compared with these respective weights, a 150-pound body would weigh about 25 pounds on the Moon and more than 2 tons on our Sun. These calculations leave centrifugal force out of consideration.

There are many other interesting facts about the largest planet and the smallest planet of our Solar System. We know that it takes our own Planet about 24 hours to rotate once around its axis. Now, Mercury takes about 88 days to complete one of its axial rotations, and Jupiter only about 10 hours. That is to say, the planet Jupiter rotates more swiftly around its axis than any of the 7 other planets. Respecting moons or satellites, Mercury possesses no known moon, whereas Jupiter has 9 known moons revolving around it. One of Jupiter's moons, Ganymede, is larger than the planet Mercury, and another one, Callisto, is almost as big as Mercury.

And, now, how large is the largest planet in our Solar System and how small is the smallest planet?

The diameter of Jupiter is more than 86,500 miles, our Earth's diameter being about 7,918 miles. Accordingly, Jupiter's circumference is more than 10 times that of the earth, and this giant planet's volume is over 1,309 times greater than our own planet's volume. With respect to some of the other planets, Jupiter is about 1 7/10ths times as large as Saturn and nearly 9,000 times as large as Mars, and approximates the volume of 24,000 Mercuries, combined in one planet. It is 64,000 times as large as our moon.

As for the planet Mercury, its diameter is about 3,000 miles, or nearly 39/100ths the diameter of our World. Accordingly, this pigmy planet's volume is only about 1/18th of our Earth's volume. The planet Saturn is some 14,000 times as large as Mercury, and the planet Mars almost 3 times as big. Mercury is larger than our Moon, but only 2 3/4ths times as large.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

Around the Universe

By RAY CUMMINGS

THIRD INSTALLMENT

The Sky Travelers Were Greatly Impressed Upon Their First View of the Landscape and Buildings on Jupiter. The Buildings Were Erected in Great Terraces.

SYNOPSIS OF TWO PRECEDING INSTALLMENTS OF "AROUND THE UNIVERSE"

WHILE watching a game of cards "Tubby" suddenly finds himself out in the open under the stars. He also finds that he has been endowed with a power of wishing and having his wishes come true. He wishes that he could know all about the stars and astronomy and there appears before him a man who introduces himself as Professor Isaac Swift DeFoe Wells-Verne. The Professor tells "Tubby" that he will teach him all about astronomy. Tubby then wishes that he could travel everywhere in the universe and before them appears a space flyer which Sir Isaac says is his invention. They start for Venus.

Landing on Venus, they meet a young lady whose name is Ameena. She tells them that the earth is in danger. Her people have found out that the Martians are about to descend upon the Earth and conquer it. Emissaries from both Mars and the Twilight People of Mercury, as the latter are going to assist the Martians, have been to Venus and tried unsuccessfully to enlist the aid of the Venusians. She says that the armies of Mars and Mercury have already conquered the Moon and placed outposts there.

The Professor decides that they must go for help to the Light Country located on Mercury, as its inhabitants are not going to enter into the war. At 7:29 p. m., Professor, "Tubby" and Ameena land upon the surface of Mercury.

CHAPTER V

IN WHICH THE MERCURIANS PROVE THEMSELVES UTTERLY SELFISH, AND THE DISAPPOINTED VOYAGERS, PURSUED BY THE ENEMY, HASTEN TO JUPITER

HOW selfish is human nature the Universe over! After a voyage of some thirty million miles, the travelers might quite as well have remained on Venus! The Mercurians of the Light Country were sorry—indeed, they greatly deplored the action of their neighbors of the Twilight Country in joining with the war lords of Mars against the unoffending Earth—but they would do nothing about it! How simple all human problems become, when viewed in that detached spirit! How human nature does repeat itself, wherever in the Universe it may be found!

The audience with the ruler of the Light Country took place at 9:40 p. m., Earth's Eastern Time—shortly after the First Meal, as time chanced to be on Mercury.

Tubby, Sir Isaac and Ameena gravely faced the white-haired King and his aged dignitaries who were seated around a huge table in the Audience Room. The place was crowded; its gallery above, open to the public, was thronged with those curious to see these strange visitors from another world.

Sir Isaac, who, fortunately, was fairly fluent in the Mercurian tongue, explained their mission. He was earnest and eloquent. And when he had finished, having done his very best, the King, after a whispered conference with his councillors, made his speech of condolence!

Sir Isaac was aghast. He translated the King's words briefly to Tubby and Ameena.

"How dare they?" the girl cried. "It is inhuman. Tell him *I* say——"

Sir Isaac interrupted her, in a whisper, for the Audience Room was intensely quiet.

"*Your* position is not so impregnable, Ameena. Your own people refused to mix up in this inter-planetary war. How can you expect——"

"My people have no weapons of war," she defended passionately. They know nothing of fighting. Never has a voice been raised in anger in my world! What could they do to help, if they would?"

"You let her alone," Tubby whispered vehemently to Sir Isaac. "She's got the right idea. You tell this King *he* can help. Ain't he got that Light-ray? Make him lend it to us."

Sir Isaac then requested the use of the Light-ray—a sufficient amount of its apparatus which they could set up on Earth for defense.

At this a stir ran over the assemblage. The King's guards, squat little men in leather jackets and wide, knee-length leather trousers, shouted for order. Several young girls flapped their long red-feathered wings—only the women had wings, it seemed—and one fluttered across the room near the ceiling, until commanded by the guards to cease.

The King looked exceedingly grave at Sir Isaac's request; his whispered conference with his advisors lasted several minutes. At last he shook his head.

Sir Isaac translated his answer. "He says he is sorry. They could not trust their Light-ray to another world. He claims the Earthmen would then learn its secret and some day might use it against Mercury."

"He's a fool!" shouted Tubby angrily. "Ain't they got it on Mars already? An' maybe on Jupiter?"

TUBBY SASSES THE MECURIAN KING

He turned toward the King. "Say listen here you——"

Thirty feet separated Tubby from the King at that moment, but he encompassed it in one bound, for on so small a planet as Mercury even Tubby weighed hardly sixty pounds! He landed beside the King's chair.

"Say, listen here you——"

As Tubby's fat little body went hurling through the air pandemonium broke out in the room. Girls were fluttering about; the guards were pushing and shoving the crowd. One or two of the older women fainted. A little boy broke into terrified screaming.

The King, finding he was not hurt, ignored Tubby's fist in his face, and with rare presence of mind rose to his feet, shouting reassuringly to the assemblage. Three of the nearest guards, their faces dark with anger, were making for Tubby belligerently; one of the aged counsellors put a restraining hand on his shoulder, but he shook it off.

Sir Isaac bawled:

"Come back here, you fool! They'll kill us all!"

It was Ameena's pleading voice, rising above the tumult, that brought Tubby to his senses. He stopped abruptly his abuse of the King, and with another prodigious bound leaped over the heads of the intervening people, and landed back beside his friends.

"Come on, let's get out of here," he gasped. "This here Mercury ain't goin' to get us nothin'."

The Three Interstellar Travelers Lay Their Plans Before a Court Session on Mercury—But to no Avail

Digitized by Google
Original from UNIVERSITY OF CHICAGO

Sir Isaac, with true diplomatic suavity, waited until order was restored. He then paid his respects to the King, apologizing for Tubby's conduct, and stating with curt dignity that the Earth would solve its own problems and look after its own safety in its own way. After which, escorted by the King's guards to protect them from the incensed populace, the three visitors coldly departed.

As they left the room, a young girl—with huge wings and a sneering, unpleasant face, so different from the beauty of the other girls in the room as to mark her of another nation—climbed from the balcony into one of its outer windows. Poised there a moment, she launched herself into the air, spread her wings and flew away.

Sir Isaac, Tubby and Ameena were on the palace steps when this girl flew past, just over their heads. She shouted something venomously at Sir Isaac, and rising higher, flew rapidly toward the Narrow Sea and the Twilight Country.

Sir Isaac did not mention this incident then to Tubby or Ameena, who had not noticed the girl. Indeed, he forgot it in a moment, though afterward it was brought most vividly and unpleasantly to his memory.

FLYING THROUGH SPACE ONCE MORE

It was 11:45 p. m., Earth time, when the vehicle was again launched into space. When they had passed over the Dark Country and had left the atmosphere of Mercury—headed this time away from the Sun, back toward Venus and the Earth—the three interplanetary adventurers sat down quietly in the instrument room to determine what should now be done, in the face of this unexpected disappointment.

"An' here we went an' wasted all day," Tubby moaned. "We could have been almost anywhere while we was foolin' around here with them selfish, pin-headed——" He trailed off into abuse of the Mercurians.

Sir Isaac, more practical, summed up the situation as it now stood.

"We have, of course, no means of knowing whether the inhabitants of Jupiter are against us or not," he said. "But at all events, at the next opposition of Mars with the Earth we may expect their attack."

"Less'n two months from now," Tubby put in gloomily.

"In fifty-six days and eighteen hours," Sir Isaac corrected. "I assume their method will be to mass their army first upon the Moon. From that point of vantage, always close to the Earth, they can launch their successive attacks at will."

"That is what they will do," Ameena cried. "From the Moon, of course."

Tubby frowned. "What will they do to the Earth? You say they're goin' to kill us, but you ain't never said how."

Then Sir Isaac, his voice trembling in spite of himself, explained the horribly destructive power of the Mercurian Light-ray—that beam of red-green light-fire, which from giant projectors ignited everything within its path over a distance of fifteen miles! And the tremendous war-machines of the Martians — giant mechanical bodies housing the Martian directing brain in their tops —mechanisms with metal legs like steel girders fifty feet long running rampant over the Earth!

Together the Two Men Rushed Up Into the Little Observatory of the Space Flyer. Another Vehicle Twice as Large as Their Own and Somewhat Different in Shape, Hovered Almost Directly Above Them, Showing as a Dark Spot in the Firmament and Edged With Silver From the Sun's Rays Behind It.

"That's enough!" interposed Tubby hastily, mopping his face. "Don't tell us nothin' more like that. My idea is, we better not let 'em land on the Earth."

"Quite right," agreed Sir Isaac. "But how to prevent them? That's just the question."

It was the question indeed, and for another hour they wrestled with it.

"Let's eat," Tubby suddenly announced. "We can do that if we can't do nothin' else."

Tubby now found himself, after this episode on Mercury, somewhat more in the nature of leader of their enterprise than he had been before.

"We're done with Mercury," he said, when over the midnight supper the argument was resumed.

Sir Isaac nodded. "We are, most certainly."

"An' Venus ain't no use to us."

"No," Ameena put in. "My world is powerless."

Tubby went on with merciless logic:

"If we go home an' wait, we're licked sure."

"Yes," agreed Sir Isaac, "that will mean absolute annihilation, even though the world's armies and navies were massed to our defense."

"An' we *can't* land on the Moon," Tubby persisted. "They'd murder us in thirty seconds—on our own Moon too." The pathos of this struck Tubby with sudden force. "Ain't that actually criminal? Can't land on our own Moon!"

"What *are* we going to do?" Ameena asked hopelessly. "Oh, dear, we cannot seem to land anywhere."

"How about Jupiter?" Tubby demanded. "That's a big place, ain't it?"

"The largest planet of the solar system," said Sir Isaac. "But whether they are friends or enemies——"

"Well let's go see an' find out!"

The logic as well as the daring of this simple suggestion was immediately apparent.

"If them Jupiter people ain't enemies they can help us easy," Tubby added. "Let's take a chance anyway."

There seemed nothing else to do. The Earth was powerless to defend herself. Help must be obtained—from whatever source—at all costs.

And so it was decided.

THE COURSE SET FOR JUPITER

Back in the instrument room Sir Isaac computed their course to Jupiter. A little later, for it was then nearly three o'clock in the morning, Ameena retired to the upper floor.

The vehicle had now reached a point in space almost midway between Mercury and Venus. Tubby, suddenly remembering the asteroid with which they had so nearly collided that afternoon, peered anxiously down through the lower window, to the tiny blue-white disc among the stars that was Venus.

Sir Isaac, hearing Tubby's muttered exclamation concerning the asteroid, laughed reassuringly.

"It has passed on in its orbit," he said. "Rushing around the Sun in a most eccentric ellipse, it is now many million miles from here."

Having been the one to suggest their future course of action, Tubby was feeling his growing responsibility. He felt simultaneously his need for more specific astronomical information than he now possessed.

TUBBY LEARNS MORE ABOUT STARS AND ORBITS

"If I'm goin' to boss this expedition," he

(*Continued on page* 505)

The Great Mogul of Jupiter Was a Towering Giant Some Fifteen Feet Tall. The Audience With His Highness Was Held in Front of the Space Flyer as the Travelers Found It Difficult to Walk on Jupiter, Owing to the Great Gravitational Pull Which Increased Their Weight Considerably.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

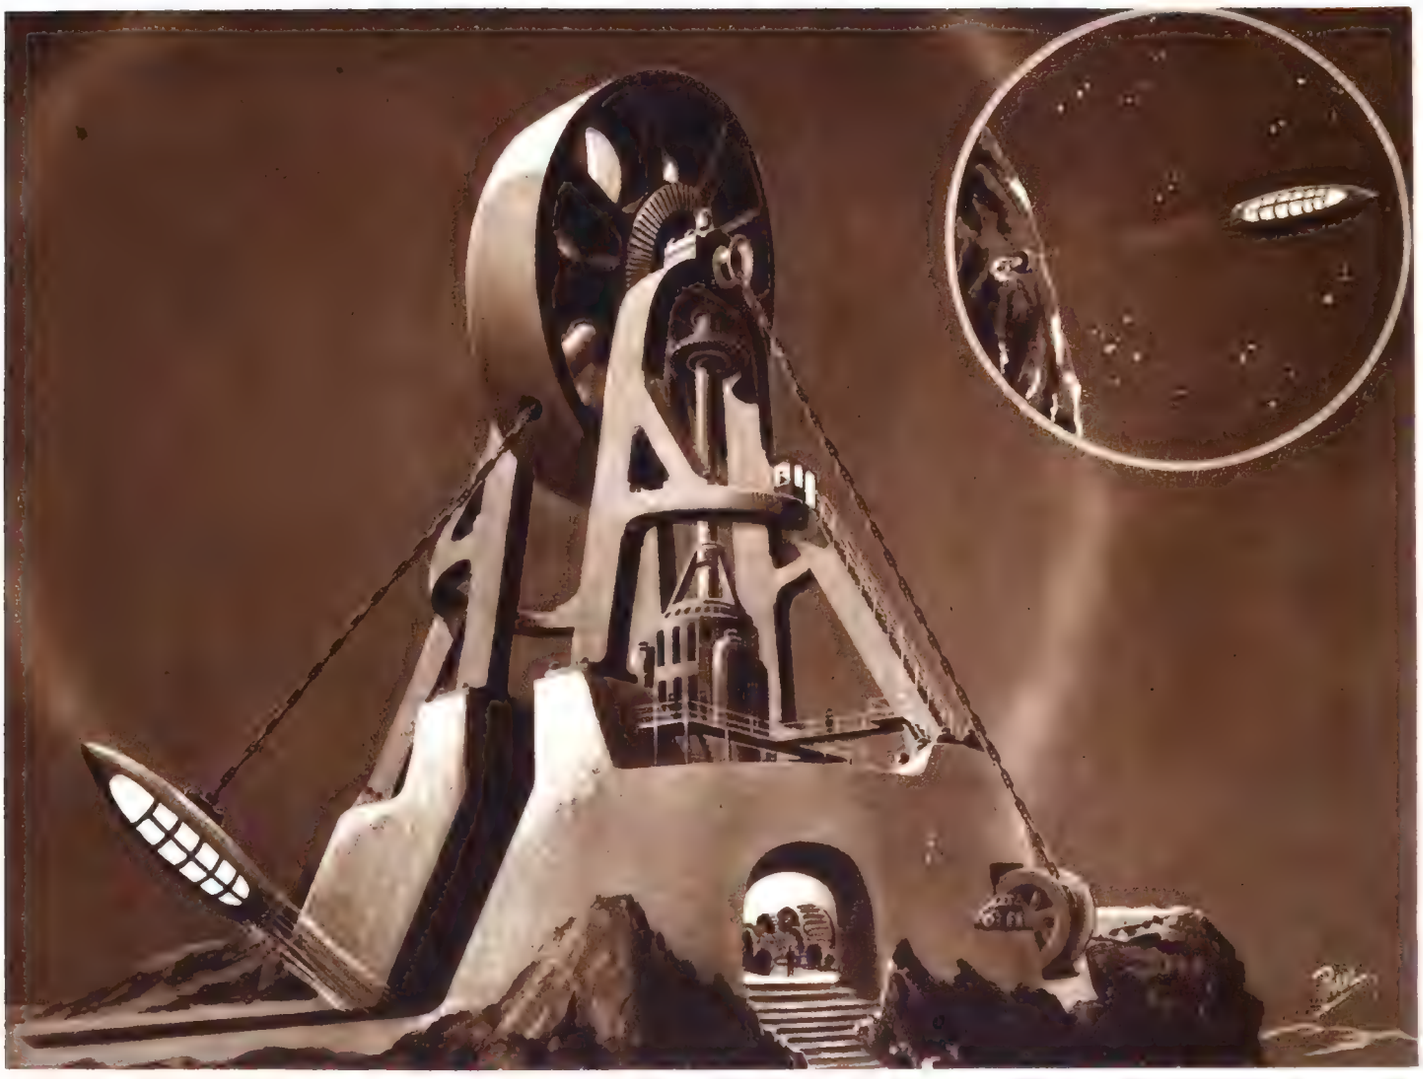

© 1933, by SCIENCE & INVENTION

View of the Gigantic Machine Designed by Dr. Hackensaw for Projecting His Moon Car on Its Journey Away From the Earth. The Passengers Are Placed in the Car Itself, and As the Huge Wheel Is Rotated by a Giant Electric Motor, the Chain Is Fed Into the Hub of the Wheel and Causes the Radius of the Swing to Be Increased. When the Velocity of the Car Has Reached a Certain Point, It Is Suddenly Released and Leaves the Earth.

Doctor Hackensaw's Secrets

By CLEMENT FEZANDIÉ

(Author's Note. Will man ever be able to travel to the moon or to the nearest planets? The problem is one of perennial interest, and many fiction writers have attempted to solve it. Numerous fantastic schemes have been proposed, but I have endeavored to show in the following story that the sending of a passenger to the moon is by no means an impossibility).

No 20 A Car for the Moon!

"DOCTOR," said Silas Rockett, "Did I understand you to say that you intended to send a car to the moon?"

"You certainly did, Silas," replied Doctor Hackensaw. "The moon was in a condition to support life hundreds of thousands of years before the Earth. Hence there may be intelligent creatures on the moon with inventions far in advance of our wildest speculations. Think what it would mean to open communication with them and learning what it would otherwise take us a hundred thousand years or more to learn! It would be a triumph such as no man has ever achieved before me!"

"I understand that," said Silas, "but what I don't see, is how you are going to send your car of specimens to the moon. Many fiction writers have tackled the problem of communication with other worlds, but I confess that none of the methods I have read about seems to me to have any scientific basis. But tell me first, straight out, whether you really believe it is possible, at the present day, to send a car of any sort to the moon?"

"Not only do I believe it possible, Silas," replied Doctor Hackensaw, "but my conviction is so strong that for the past few years I have been secretly at work on the preparation necessary for sending a car full of specimens to the moon."

"What!" cried Silas in amazement. "You have already started making preparations for the trip? Is it possible that you have discovered some new force, some new means of locomotion?"

"No, Silas. The forces I shall use are all well known."

"But how in the world will you accomplish it? None of the schemes I have read about seems to offer the slightest possibility of being put into practice."

"What schemes have you read of?"

SILAS AND THE DOCTOR DISCUSS VARIOUS SCHEMES

"First of all there was the idea of being carried to the moon by birds. If I remember correctly, it was Cyirano de Bergerac who made the journey in that way. Such a method is of course impossible."

"True. No bird could fly to the moon. I'll admit that."

"Next, Edgar Allan Poe sent Hans Pfaal to the moon in a balloon. That, too, was impossible."

"I am ready to admit that also. Understand me; I am not a believer in the *ether* theory of light. Consequently I do not believe the heavens are filled with the so-called 'ether.' Nor do I believe there is an actual vacuum in space. My idea would be rather that there is a highly rarefied atmosphere between us and the planets. But, regardless of the question as

(*Continued on page* 502)

Digitized by Google
Original from UNIVERSITY OF CHICAGO

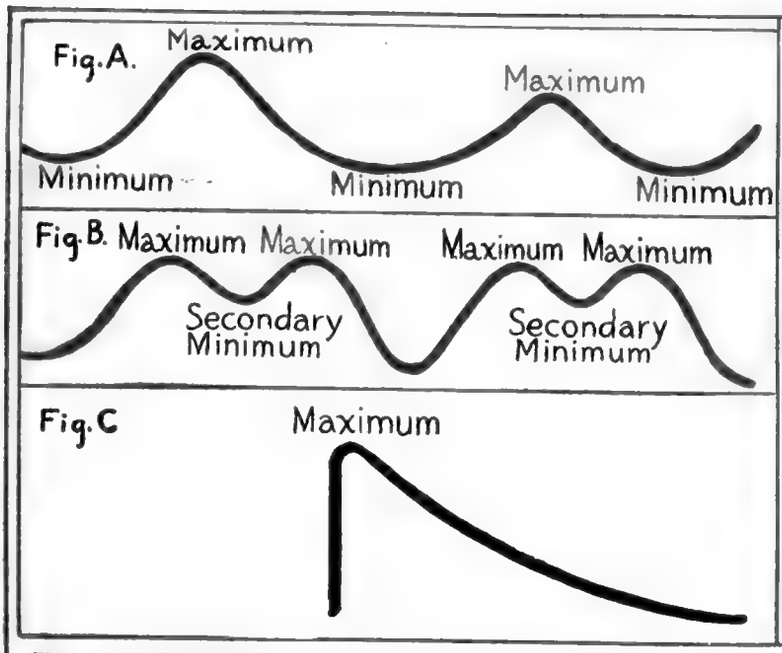

Fig. 1 Above Shows Light Fluctuations and Periods for Three Types of Variable Star. The Horizontal Distance Indicates the Period; and the Vertical the Light Range. Fig. A Is the Light Curve of a Long Period Variable (Class II). Notice How the Two Maxima Differ in Brilliancy. Fig. B Is the Complicated Light Curve of a Star of Class IV; and Fig. C, the Curve of a Nova.

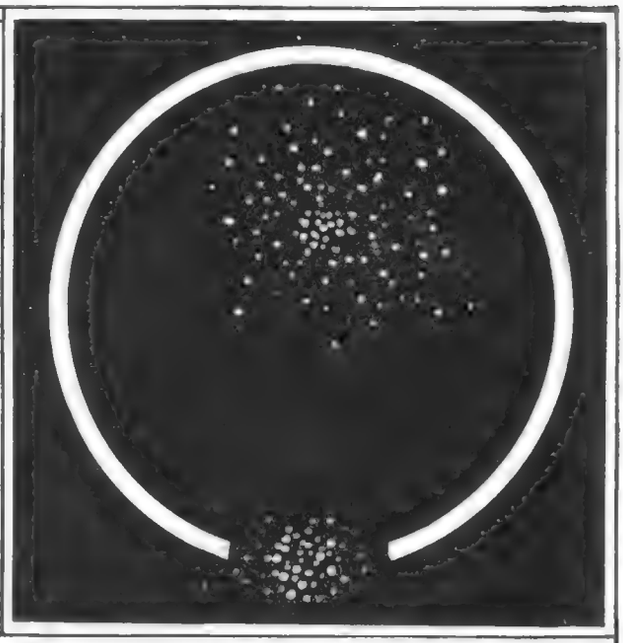

Fig. 2. Sir Norman Lockyer's Explanation for Long Period Variables. The Smaller Group of Meteors Travel Around the Larger, Which Is Situated Toward One Side of the Orbit. Periodically Collisions Take Place. Intense Heat Is Developed Leading to a Brilliant Conflagration.

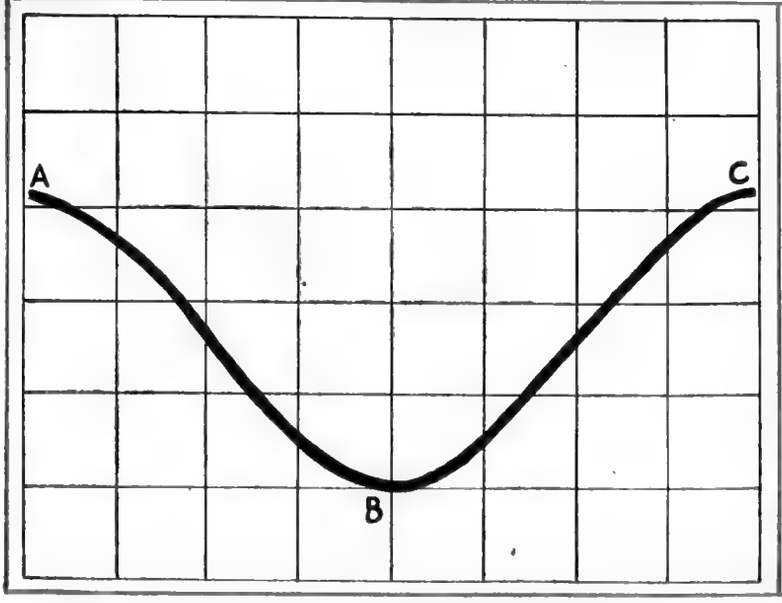

Fig. 3. The Light Curve of Algol, Which Is Typical of the Periodic Fluctuations of All Stars of Class V. From A to B Requires 4½ Hrs. From B to C, 3¼ Hours. Minimum Lasts 20 Minutes.

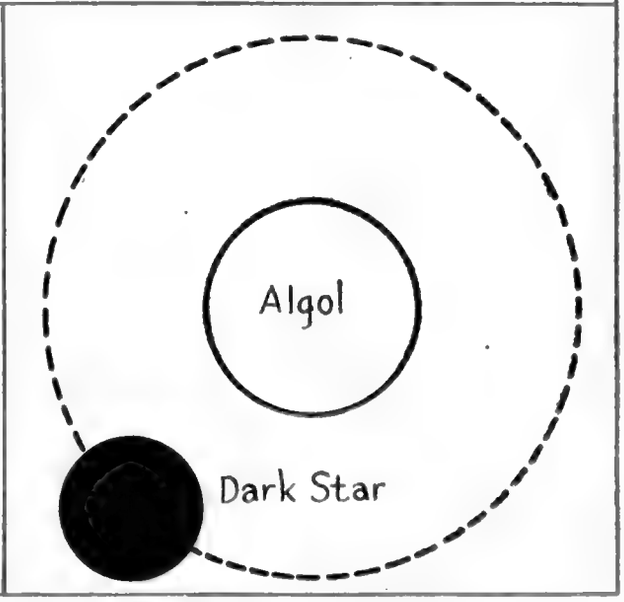

Algol and Its Black Companion. The Fluctuations in the Light of the Former Are Caused by the Latter Periodically Passing Between It and the Earth, and Lessening Its Brilliancy.

Variable Stars

By RUFUS O. SUTER, Jr.

THE average person is little affected when he considers that if Aristotle should come to life today a casual observation of the heavens would reveal no change in the brilliancy of the stars. We have grown to look upon the sky as the paragon of constancy; but, as is often the case, we do not realize that this constancy is one of the greatest marvels which Nature presents. Every star is an incandescent mass so huge that if the earth were dropped into its seething depths, the catastrophe could only be compared to the dropping of a marble into a roaring steel-mill furnace. Nevertheless, each of these suns has poured into space for countless aeons, energy on the average amounting to 100,000 horse-power per square meter. Throughout the ages this unbelievable output has continued, undiminished and without fluctuation.

Fortunately, everybody does not regard matter-of-fact phenomena indifferently. Few discoveries would be made if this were the case, because curiosity often leads to the most successful investigations. Astronomers have been so impressed by the proverbial constancy of the stars that they have searched the sky for ages to find some exception. The ancients discovered the well known Algol, which undergoes fluctuations; and Mira, which every ten months drops from a luster rivaling that of the North Star to invisibility. Eighty years ago Argelander, the great German astronomer, catalogued eighteen stars which he believed were inconstant. Today scrutinizing observation has revealed that out of the 125 million stars visible through the most powerful telescopes, only 5,000 change in brilliancy.

Thus, peculiar as it may seem, irregularity of energy-production in the Sidereal Universe is the exception rather than the rule. These variable stars are a class by themselves, governed by laws with which we are largely unfamiliar. Professional and amateur astronomers the world over have united forces in obtaining systematic observations, with the hope that in time data enough may be secured to solve the mystery which surrounds them.

Observation already has revealed the fact that variables fall into five distinct classes:

1. The novae, or new stars, which sud-

(*Continued on page* 490)

Digitized by Google
Original from UNIVERSITY OF CHICAGO

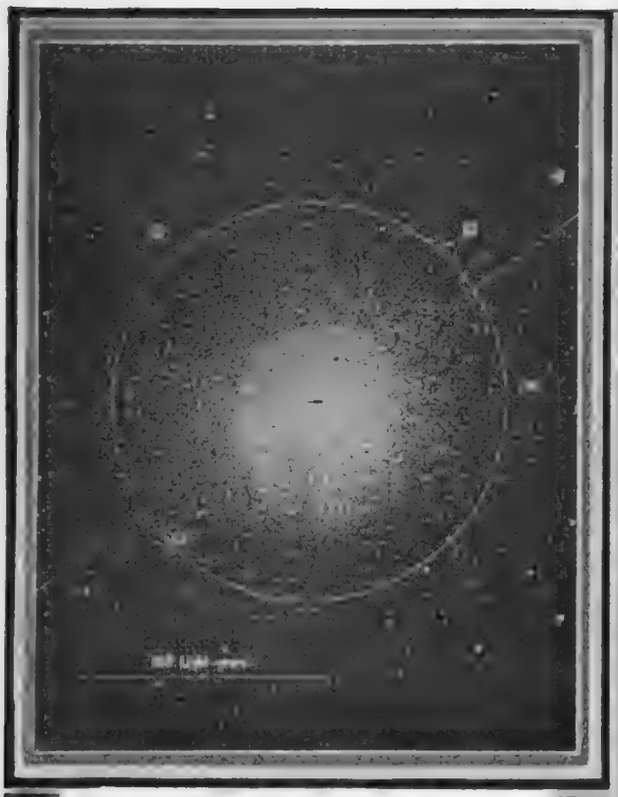

Messier 13, the Great Cluster in Hercules. The Small Black Line Indicates the Distance from the Center to the Nearest Star. The Hyades Would Be as Distant as the Star Marked H. The Circle Is 160 Light Years Across. The Stars in Small Circles Are 100 Times as Bright as Our Sun.

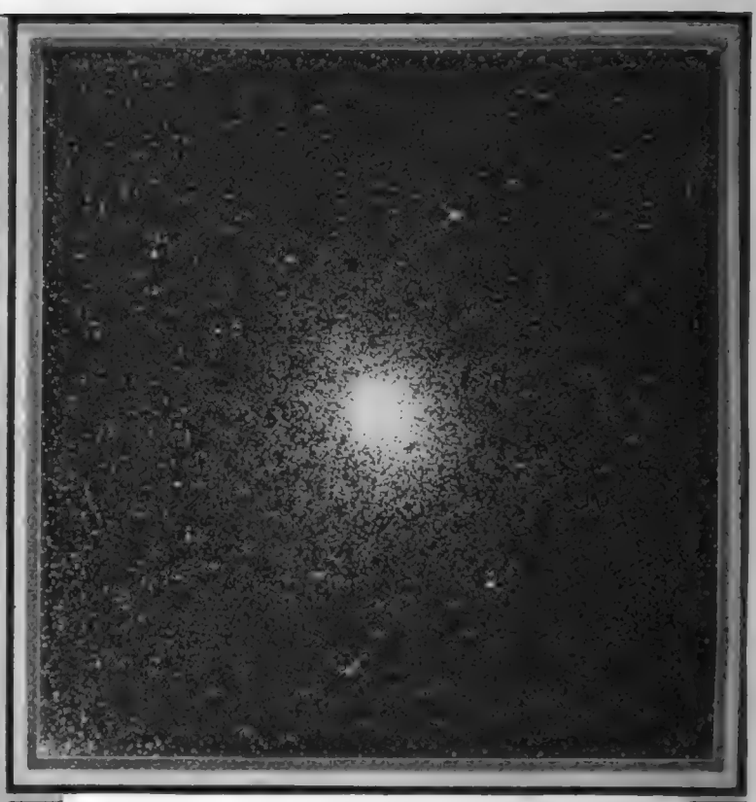

Messier 22, a Globular Cluster in the Constellation Sagittarius. It Contains More Than 50,000 Stars. It Is So Far Away That Its Light Must Travel Across Space for 27,000 Years Before It Reaches the Earth.

A Spiral Nebula, Seen Edgewise; In This Position the Nebula Is Often Called a Spindle. The Nucleus Is so Much Brighter Than the Material in the Spiral Arms That They Appear to Cross the Nucleus as a Dark Streak.

The Pleiades, a Well-Known Cluster in the Constellation of the Bull, Showing Nebulosity Around Some of the Brighter Stars.

Star Clusters

By BASIL NEWCOMB

OF THE HARVARD COLLEGE OBSERVATORY

SINGLE stars, quite free from close alliances, are apparently not in the majority in our universe. Very frequently stars occur in groups of two and three. Sometimes a score or two [illegible] together, and occasionally we find [illegible]ons of a hundred thousand

The ancients gave mythical names to the familiar groups of bright stars, and these constellation names are used to this day. But the constellations in general are chance and often imaginary arrangements; their stars are seen near to one another by projection only. The real grouping or clustering tendency mentioned above is something different. It signifies actual association in motion, origin, color and distance, indicating that the stars of any one group or cluster are physically related to one another.

A few constellations of the ancients, however, have been proved by modern research to be clusters in the true sense of the word.

(*Continued on page* 498)

Digitized by Google

Original from UNIVERSITY OF CHICAGO

High Power Telescope for Your Garden

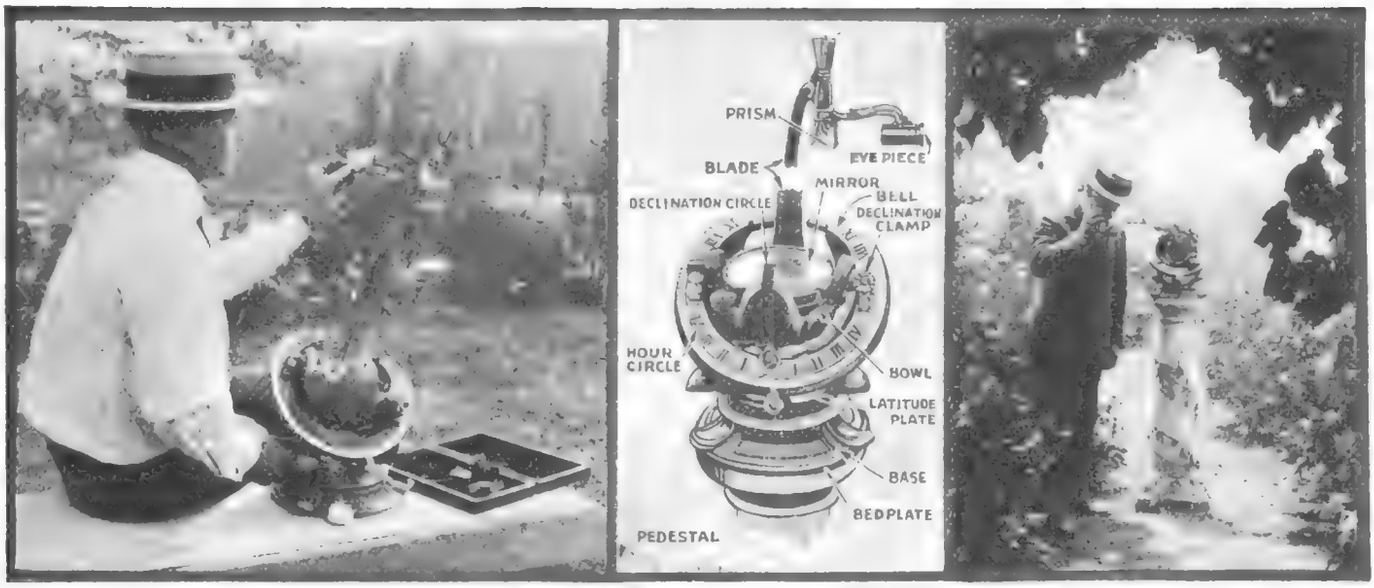

A New Six-Inch Diameter High-Powered Reflecting Telescope Suitable For the Garden Or Other Locations Has Been Brought Out By An American Manufacturer. There Has Been a Long Felt Want For a Telescope of This Type Which Should Cost Neither Much Nor Little, But Be Capable of Fairly High Magnification. The Man At the Left Is Telling the Time By Focusing the Telescope On the Sun and Reading the Dial Settings, As Given In the Instruction Book Furnished With the Instrument. The Center Picture Shows Details of the Telescope, Including the Six-Inch Diameter Mirror, Reflecting Prism and Eye-Piece. The Right-Hand Photograph Shows How the Telescope Appears In the Garden and How Convenient It Is For a Person To Look Into the Eye-Piece, Which Is Placed At the Side of the Telescope.

THIS garden telescope is as useful by day as by night. It may be placed on the lawn on a pedestal, or may be set up on the porch for viewing distant objects. If the city dweller has a place available on his roof, it may be equally well placed there—on the verandas of summer hotels, in the mountains or on the shore—always ready for instant use. It requires no care—no more than would be bestowed on a garden sun dial. The mirror is a polished glass concave disk, silvered on its front surface, lacquered to protect its silver coat. The mirror is protected when not in use by a cast-bronze cover with machined edges that fit tightly to the mirror cell. The mirror always faces the object viewed and since the eyepiece can be moved around the end of the blade to any position, the observer may always be comfortable whether the object he is viewing is overhead or on the horizon. There are none of the back- and neck-breaking attitudes required in some positions of the common telescope.

SIGHTING AND FINDING

On the back of the blade are two pointers, and these are used very much like gun-sights in picking up distant objects. When they are in line with the object, it will be seen in the eyepiece. They constitute a finder. For terrestrial use, then, the declination and base clamping screws are released and the telescope can be swung around and brought to bear on any desired object. No other adjustments are necessary. The mirror and eyepiece may be taken indoors, if desired, when not in use, for safe keeping.

The earth turning over on its axis gives the stars an appearance of moving across the heavens. To follow the stars, therefore, the telescope has one bearing parallel to the earth's axis, thus constituting what astronomers call an equatorial mounting. The other bearing of the telescope, the declination axis, which carries bowl, blade and telescope and it permits pointing or setting on any object in the heavens. A part of the bell is cut away to prevent interference with the blade in certain positions. This is shown clearly in the photograph above.

AS A TIME KEEPER

Like the sun dial, the garden telescope gives us sun-time, but with greater accuracy. One of the photographs indicates how this is done. The telescope is pointed at the sun, not by looking into the eyepiece, but by projecting an image of the sun on a card placed near the eyepiece. The sun-time is then read off on the hour circle on the rim of the bell. Watch or standard time may be found by consulting a table for this purpose in the booklet furnished with the telescope. If the house clock, or your watch, has run down, the time is thus readily recovered on any clear day. This garden telescope is a complete reflector. It comprises a six-inch parabolic silvered mirror of approximately two feet focal length, totally reflecting glass prism, with one-half inch E.F. positive prismatic erecting eyepiece giving fifty magnifications; solid bronze combination mounting.

FIRST

HAVE you ever noticed in the past years that SCIENCE AND INVENTION almost invariably prints all scientific developments, new inventions, new achievements and discoveries ahead of any other publication?

Nine times out of ten SCIENCE AND INVENTION has the news FIRST. For that reason SCIENCE AND INVENTION is quoted in perhaps more publications than any other scientific journal in the country.

SCIENCE AND INVENTION has the goods! This magazine is not made up several months in advance, as others are, but very often the forms are held on the presses and new matter is substituted for articles that are of no particular importance at the time.

SCIENCE AND INVENTION aims to be timely at all times. If you wish the news first, SCIENCE AND INVENTION is the magazine to read.

Some Feature Articles in October Science and Invention

NEW NAVAL RADIO-CONTROLLED TORPEDO.
By Graser Schornstheimer, Naval Expert.

AERIAL BLOOD-HOUNDS TO CHASE ENEMY AIRCRAFT IN FUTURE WARS. By Raymond Francis Yates.

SOME REMARKABLE FINGER PRINTS.

REFUELING AIRPLANES IN FLIGHT.

OFFICE EQUIPMENT IN THE DAYS OF POMPEII. By C. B. Bunnell.

THE MARK VIII TANK—AND WHAT IT CAN DO.

GOLD FOIL—HOW IT IS MADE.
By Ismar Ginsberg.

EIGHTY STORY SKYSCRAPERS NEXT.

A NEW SOLAR POWER PLANT.
By Dr. H. Becher.

AROUND THE UNIVERSE—SCIENTIFIC FICTION. By Ray Cummings.

DR. HACKENSAW'S SECRETS.
By Clement Fezandié

LOADING RECEIVING SETS FOR LONG WAVE LENGTHS.
By Marius Logan.

RUBBER HOSE—BALLS AND OTHER GOODS—HOW MADE.

SPECIAL PRIZE CONTESTS.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

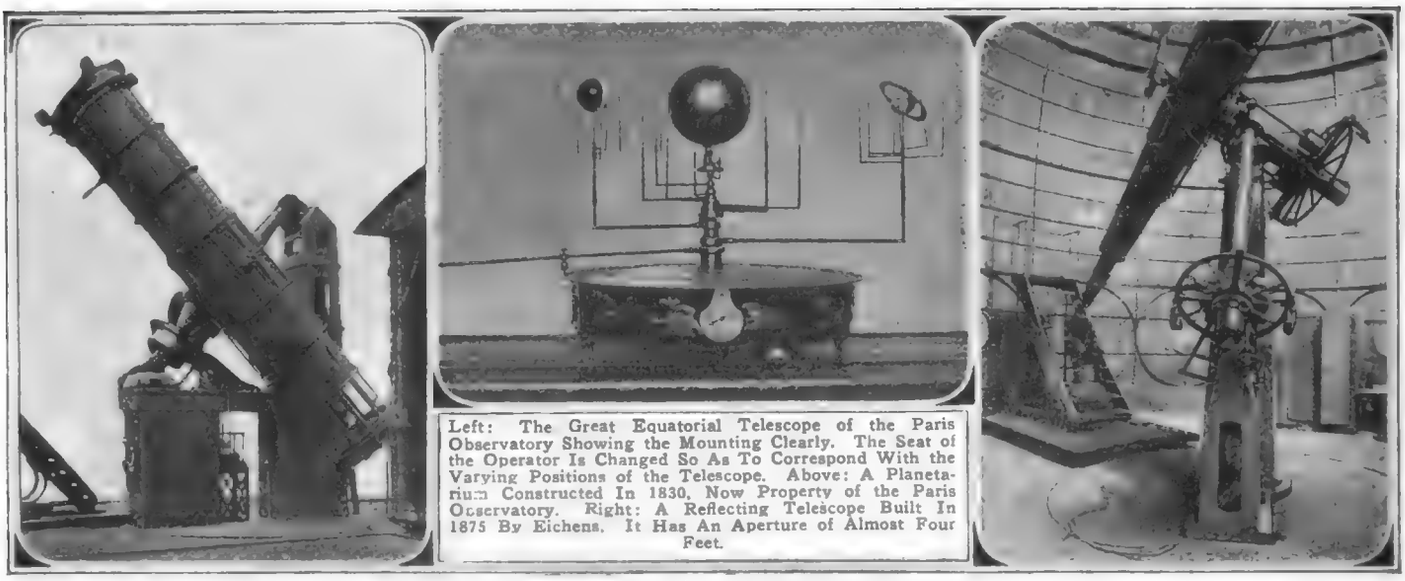

Left: The Great Equatorial Telescope of the Paris Observatory Showing the Mounting Clearly. The Seat of the Operator Is Changed So As To Correspond With the Varying Positions of the Telescope. Above: A Planetarium Constructed In 1830, Now Property of the Paris Observatory. Right: A Reflecting Telescope Built In 1875 By Eichens. It Has An Aperture of Almost Four Feet.

The Paris Observatory

THE establishment of the Paris Observatory goes back to the days of Louis XIV. Richelieu originated it as far back as 1664, Colbert took it in hand, and it is curious to read that the object was to rival or to equal the observatories of England, of Denmark and of China. Claude Perrault, celebrated architect of the Louvre, put up the first building and work was begun upon it in 1667. Efforts were made to get the great astronomers of the world, such as Huyghens, Newton and Leibnitz, to come to the observatory. None of these would come and eventually Jean Dominique Cassini from the famous University of Bologne was put in charge, and three generations of Cassini's succeeded each other in conducting the observatory.

It is interesting to read about the old-time instruments of the eighteenth century. The telescopes were of small diameter with long focus lenses. For observations in the regions of the zenith, a building without a roof was used, and there was a long gap or slot made in the northern wall of the building for raising and lowering objectives to different heights. We are told that there was a wooden tower, which carried on its top an objective of two hundred and fifty foot focus. There was no tube and the astronomer at the base of the tower held the eye piece in his hand, remarkable dexterity being required to make observations under these conditions.

Of course, many discoveries were made in the observatory. It was there that the Danish astronomer Roemer determined that light required from seven to eight minutes to traverse the distance from the sun to the earth, really 8 minutes 20 seconds, basing his calculations on the eclipses of the satellites of Jupiter. In 1657 the catalogue of fixed stars was begun. In the latter half of the eighteenth century great activity obtained which was rudely interrupted by the French Revolution. Cassini the Fourth, as he was called, objecting to the treatment by the Convention, resigned on the day of an eclipse of the sun, September 6, 1793, and then had to put in six months in prison.

Mr. Jerome de Lalande was the Director of the observatory for some ten years following the Revolution, and he is said to have enjoyed great popularity and did good work. His great treatise on astronomy was used for several generations by students and is still consulted. A curious thing is told about his gastronomic propensities. He was very fond of eating caterpillars and spiders. Every Saturday he used to take supper with a friend, whose wife collected for his benefit a number of these disagreeable creatures and gave him a saucer full of them. He said that the spiders tasted like nuts, while the caterpillars reminded him of peaches or plums.

The great Arago figures among the workers on the staff of the observatory, concerning himself with geodetic operations, laying out the meridians during war time, which involved his being seized as a spy, and captured at sea by a privateer. He eventually reached Marseilles in 1809, after his mother had given him up as dead.

We finally come to Le Verrier. He was said to have been very unpopular, but won world-wide fame when he discovered the planet Neptune. He has been termed "the Giant of Modern Astronomy." Neptune, it must be remembered, was found by pure mathematical calculation, the data leading to its identification being based on the motions of other planets.

Many of the old-time instruments are still preserved in the Museum.

The regular work of the ever busy observatory constantly goes on, and the photography of the heavens has been completed at last.

Many special investigations, such as those of the satellites of Saturn and those of Jupiter with photometric investigations, had been carried on. By using polarized light and the spectroscope great differences in the luminosity of stars have been observed and have given the base for determining temperatures. Thus the temperature of the sun has been placed at 5,320° C., 9608° F.—far more than that of the electric arc—and these have coincided with other former observations in which polarization was not used. The temperature of one of the stars in Taurus is given at not less than 40,000° C., 72,000° F., in round numbers.

Time signals are sent from the station on the Eiffel Tower covering a great part of the world so that chronometers can be regulated thereby. These signals give time as determined in the observatory.

There are three clocks of the observatory kept in a crypt. The temperature practically never varies and the clocks are accurate to three ten-thousands of a second in a day. Sometimes no error can be detected. An astronomer can, by observing a star, determine time to one-tenth of a second, but the clocks of the observatory surpass him many times in accuracy. By methods at the disposal of the observatory the geographic positions of the principal points on the earth's surface are now being fixed. Our illustrations show some of the modern apparatus of the famous observatory and a famous old planetarium.

To Study Sun's Eclipse

The afternoon of Sept. 10 next a party of eight men, headed by Dr. John A. Miller of Swarthmore College and Dr. Heber D. Curtis, Director of the Allegheny Observatory, Pittsburgh, will gather at the tiny village of Yerbeniz, Mexico, to spend 189 seconds—the length of time the sun will be completely eclipsed by the moon—in important astronomical photography.

After journeying to Yerbeniz, which is near Cuencame, halfway between El Paso and Mexico City, the party will spend more than six weeks in setting up intricate and fragile apparatus, weighing more than two tons, which will be used in the making of the pictures.

The camp of the Sproul Expedition, as the party will be known, will be located at an altitude of 6,200 feet. It is the purpose of the expedition to obtain large-scale photographs of the sun's corona. In the equipment is a telescope sixty-five feet long. The Einstein theory will be attacked with a powerful pair of cameras, with lenses eight and a half inches in diameter, each with a focal length of fifteen feet.

Dr. Curtis built at the Allegheny Observatory machine shop an instrument for studying the spectrum of the sun in the "red" region, a thing never before attempted.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

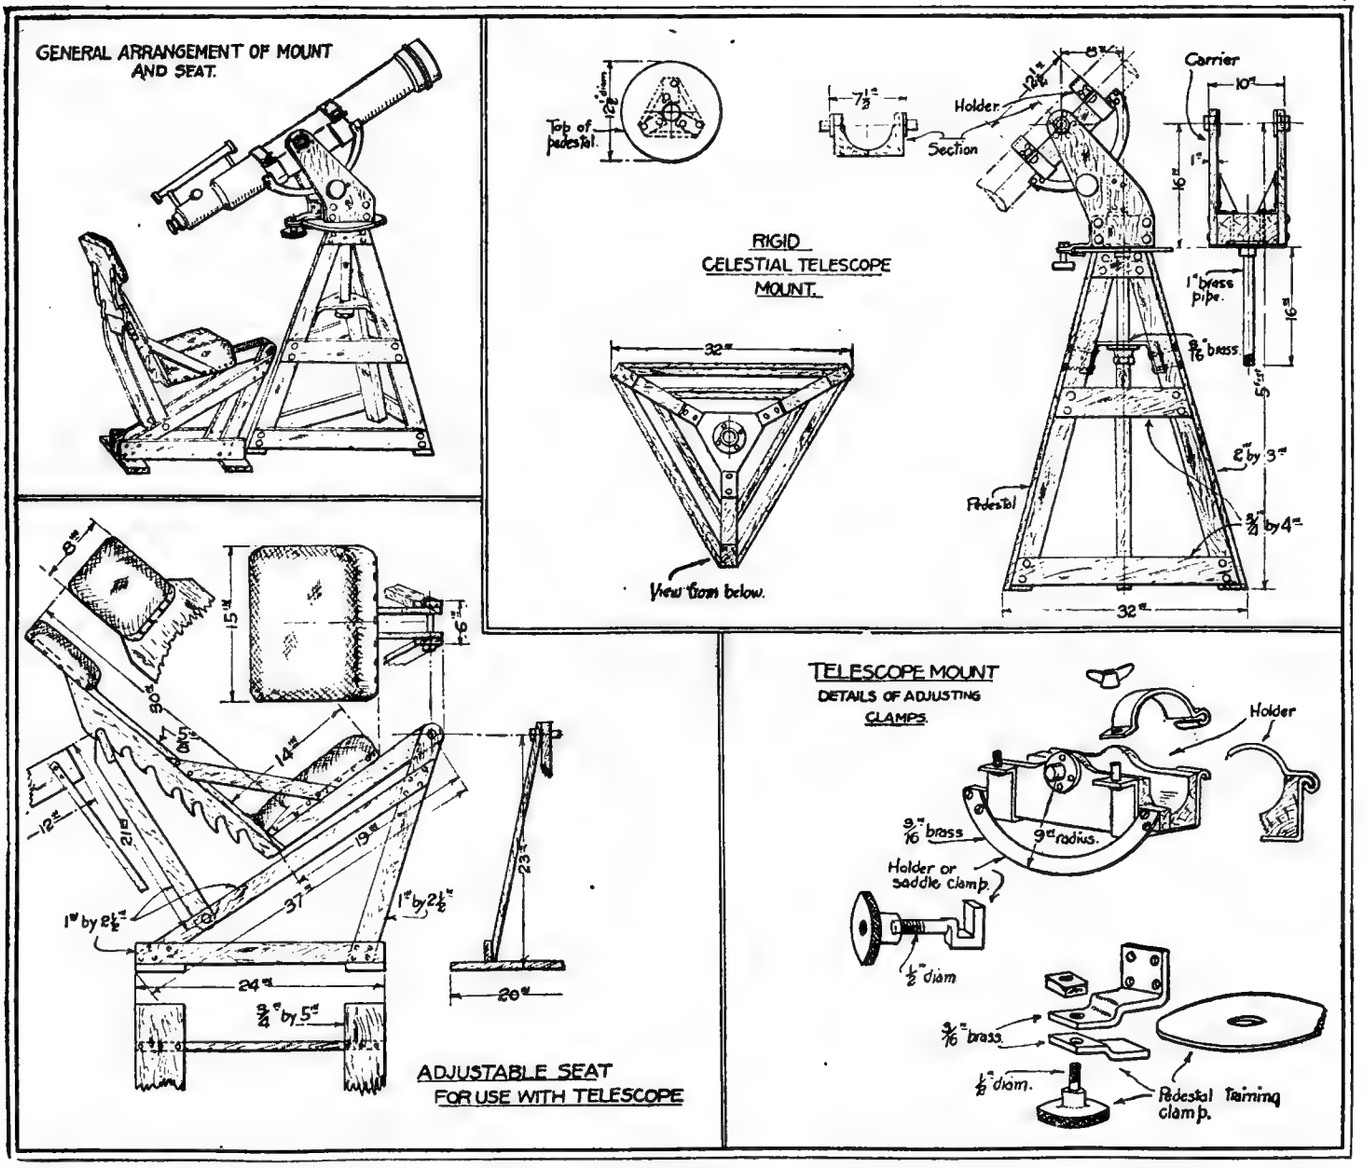

In the Upper Left Hand Corner Will Be Seen a View of the Finished Telescope Complete With the Mounting and Operator's Seat. The Upper Right Hand Illustration Shows the Constructional Details of the Rigid Mounting Used With This Telescope and the Lower Left Hand Drawing Shows the Details of the Seat. The Adjusting Clamps for the Telescope Proper Are Illustrated in the Lower Right Hand Corner.

A Rigid Celestial Telescope Mount

By GEORGE A. LUERS

THE mounting of a telescope for celestial observation is of utmost importance to obtain a decisive rigidity and avoid the disturbing flexibility, detracting from the exactness of observations.

The observer presses his head with a varying force against the eye aperture and any unsteadiness of the stand or the connections is transmitted as tremors or a flicking of the object across the telescope lens. The magnification of the telescope amplifies the movement and the unsteadiness of the mounting is a pronounced handicap to the observer. A perfect telescope inadequately mounted will give less satisfaction than a telescope with poor or faulty lens, that is supported with a proper steady pedestal with facilities for shifting the position of the telescope without decisive exertion of the observer while holding his eye steadily on the object. Obviously a jerky movement will carry the observer off the point, because of the limitations of the small field of high power telescopes. To lose the object is disconcerting and probably necessitates a long search that is annoying to the user of the instrument.

In this article a description with fully illustrated drawings for a telescope mount is given.

The construction purposely avoids expense of construction, through the use of available materials, mainly wood, however without sacrifice of the essential features for obtaining the desired stability and adjustment.

Assuming it is desired to mount a telescope of four or five feet in length with a magnification of one hundred to two hundred times, which instrument will meet the general requirements for a modest equipment, the adopted height for the tube of the telescope of five feet will afford the use of a seat for the observer, which detail from the point of time required in observations is essential to some degree of comfort.

The three legs of the tripod are secured with cross braces of lighter wood, while the upper ends terminate and are secured to a circular brass or steel plate. A triangular plate in the midposition serves jointly to brace the legs and as a section of the bearing.

The rotating part of the mount or carrier is also made of wood. A heavy block secures the pivot bearing, while side cheeks are fastened to this, using sheet metal brace plates, which side cheeks have at the upper ends trunnion bearings or bearings for the horizontal axis of the instrument.

A holder for the telescope is made in the form of a saddle, this part being provided with detachable clamps, for convenience in removing the telescope after use. The removable feature is important, as a telescope requires protection from the elements as far as possible. Moisture or sweating of the telescope is avoided by careful storage in a dry box or housing. Dirt and cinders on the lens will dull them through need of frequent wiping. Rain will frequently rust the adjustments inside the tube or make the bronze adjusters stiff.

The detachable saddle is made of wood, with sheet metal braces to hold this solid. Two trunnions or bearings are fitted to the sides for rotating in the horizontal bearing guides of the carrier. The clamps are of sheet metal bent to conform to the telescope.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

Einstein's Restricted Theory of Relativity Explained On a Model*

By VLADIMIR KARAPETOFF

PROFESSOR ELECTRICAL ENGINEERING, CORNELL UNIVERSITY. RESEARCH EDITOR OF THE ELECTRICAL WORLD.

THERE are two questions in connection with the theory of relativity of interest to a layman, namely, (a) What is the theory of relativity in the specific sense of the word used by physicists? and (b) How do we know that this theory is true? The model shown in Fig. 1 aims to answer the first question. As to proofs of the correctness of Einstein's theory press dispatches have told us of astronomical expeditions which confirmed his theoretical predictions. Moreover, there are certain physical experiments and phenomena for which Einstein's theory furnishes the most satisfactory explanation. As time goes on, this theory will either be further established by additional evidence, or else new phenomena may be discovered not in accord with it. Our present problem is to learn to think in terms of this theory.

TIME ON THE MODEL IS REPLACED BY LENGTHS

The theory of relativity furnishes no new evidences at usual velocities which are small as compared to the velocity of light (300,000 kilometers per second). Even the velocity of our Army rifle bullet is less than 1 kilometer per second. Therefore, a model must be so designed as to show phenomena at very high relative velocities, say 10 per cent, 20 per cent, etc., of that of light. The solution lies in replacing time by distances. Everyone is familiar with this mode of representation of time. For example, fluctuations in the price of a commodity in various years are represented by a curve, we replace time (years) by a length (say 1 cm. = 1 year). With this substitution of distances for time, the model needs no parts revolving at practically impossible velocities. Since the velocity of light in vacuo is a physical constant of great importance in the theory of relativity, it has been selected in the model for units of both length and time. This means that a unit distance and a unit time are represented by equal lengths, and a material point which moves at our assumed velocity of light covers 1 unit distance in 1 unit time.

*The experimental part of the investigation upon which this article is based was supported by a grant from the Heckscher Foundation for the Advancement of Research, established by August Heckscher at Cornell University.

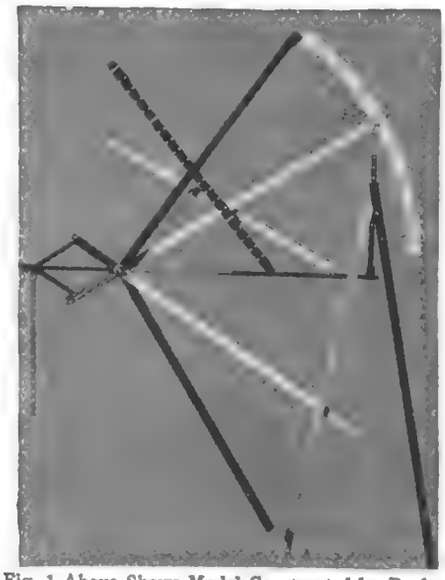

Fig. 1 Above Shows Model Constructed by Professor Karapetoff in Demonstrating the Various Phases of the Einstein Theory. School Teachers and Others Interested in Studying or Lecturing on the Einstein Theory, Will Find This Specially Written Article by Professor Karapetoff of Unusual Interest and Value.

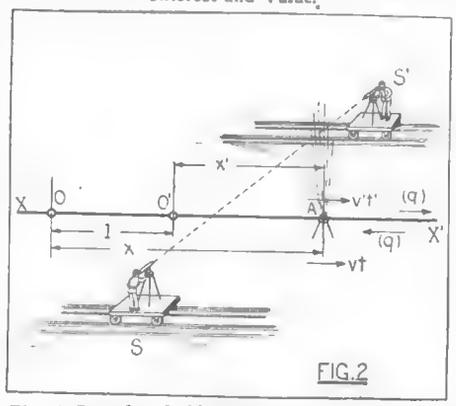

Fig. 2 Introduced Above, Shows Two Observers S and S¹ Who With Their Platforms and Instruments are in Relative Motion With Respect to Each Other, Along the Axis X X¹.

THE MODEL MAY REPRESENT TIME-SPACE RELATIONSHIPS IN A DIFFERENT WORLD

In order to dodge completely the question as to whether Einstein is right or wrong, we shall simply say that the model shown in Fig. 1 represents the space-time relationships in an entirely different world, which may or may not be similar to ours. We shall make this world logical in itself and should we find that our conclusions, derived from the model, agree quantitatively with certain observed physical phenomena, we may be made to believe that the queer world, represented by the model, may be our own world after all.

To make the conditions as simple as possible, we shall assume that in this fairyland all motion takes place along the same line XX^1 (Fig. 2) and that we have two observers, S and S^1, who with their platforms and instruments are in relative motion with respect to each other, along the XX^1 axis, at a uniform velocity q. This means that to the S observer (who thinks himself stationary) the S^1 system is moving at the velocity q to the right.

On the other hand, the S^1 observer considers himself stationary and to him the S observer with his platform and instruments appears moving to the left at the same velocity q.

According to a fundamental postulate of relativity, there is no absolute stationary point of reference in the universe and all motion is relative. Hence, there is no logical contradiction in the foregoing views of the two observers. Furthermore, we shall assume that at some time the two observers were stationary with respect to each other and adjusted their standards of length and their clocks so as to agree to a very high degree of precision. Each observer has his point of reference (O and O^1) from which he measures his distances (x and x^1) along OO^1, and the clocks at O and O^1 are so set, that at the instant when O and O^1 coincide, both clocks show zero (say twelve o'clock).

Let A be an *event*, say an instantaneous flash of light, independent of both observers, and let each observer be asked to be prepared to watch for it and to find (a) the distance

(*Continued on page* 480)

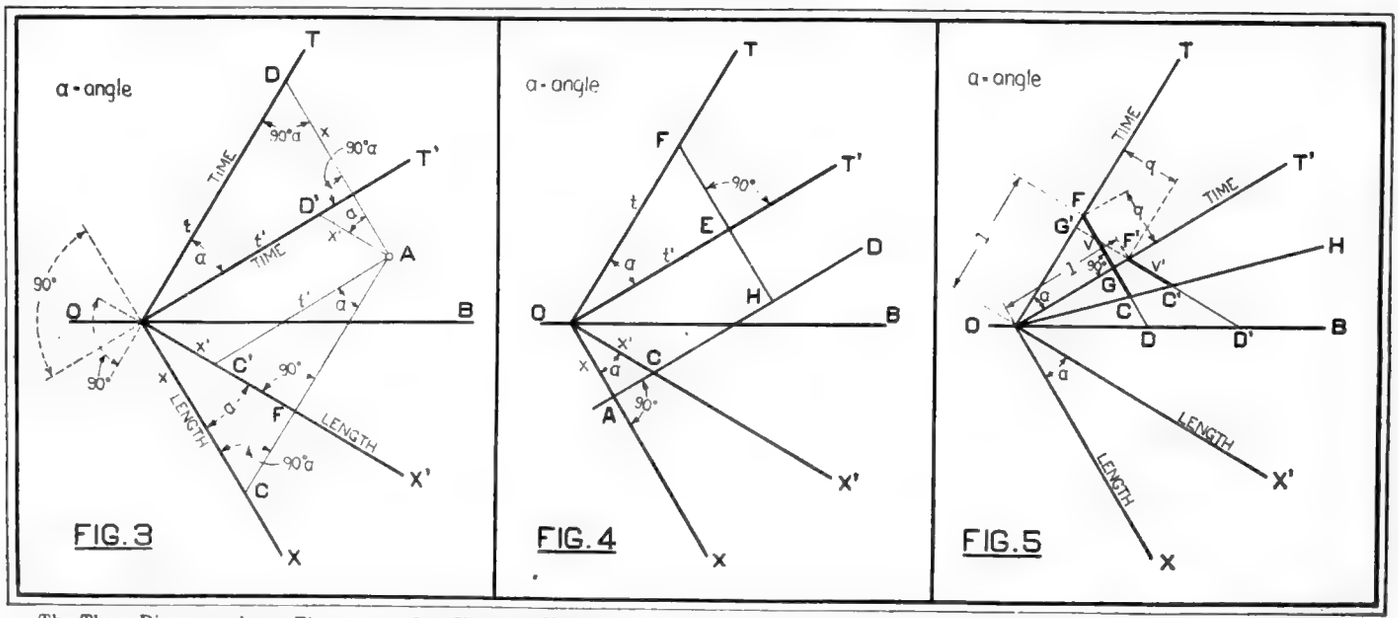

The Three Diagrams above, Figs. 3, 4 and 5, Illustrate Various Positions of the Graduated Rules or Sticks of the Model, Shown in Fig. 1 Above.

Digitized by Google

Original from UNIVERSITY OF CHICAGO

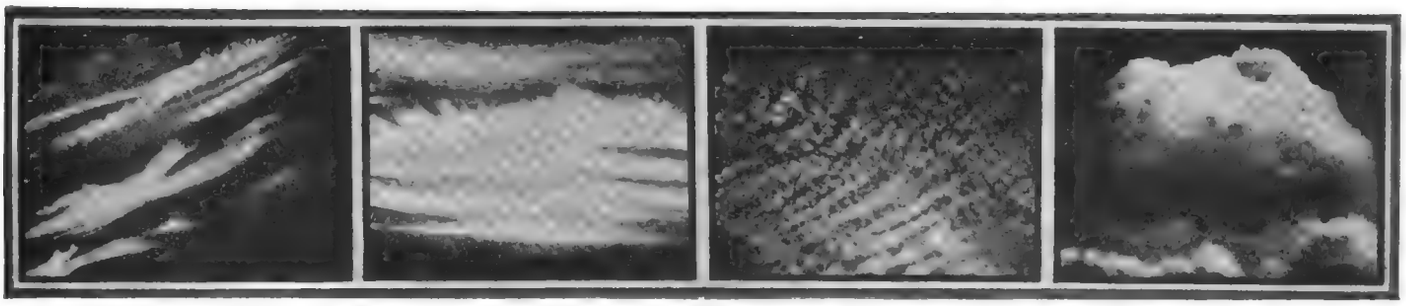

Cirrus Clouds Give Warning of Wet Weather Within Twelve to Twenty-four Hours.

Cirro-stratus Clouds Usually Precede Rain or Snow.

Cirro-cumulus Clouds Foretell Dry Hot Weather; If Edges Become Raged and Broken—Brisk Winds.

Cumulus Clouds—Fair Weather Indicators. They Also Precede Thunder Storms and Are Called "Thunder Heads."

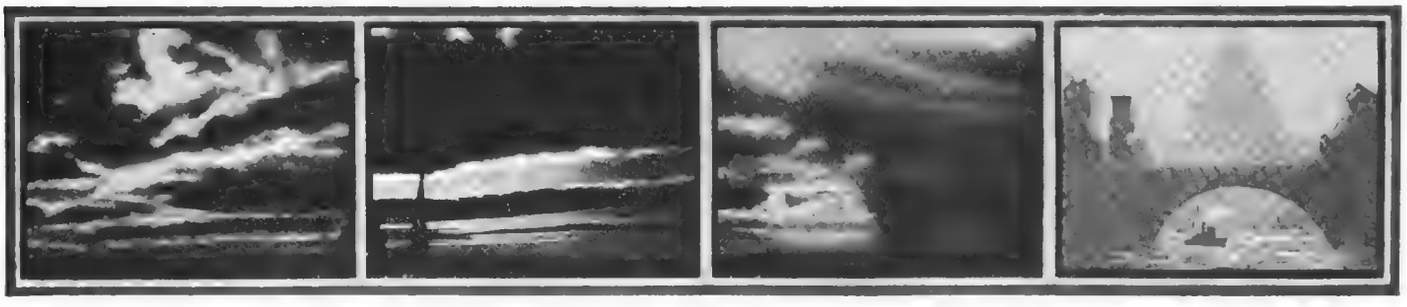

Cumulo-stratus Clouds Have a Threatening Appearance, But Are Really Heralds of Fair Weather.

Stratus—the Lowest of All Clouds—Which When Resting Over the Land Are Called Fog.

Nimbus Clouds, From Which Rain or Snow Falls.

Haze or Fog; the Ordinary Fog With Which Every one is Familiar.

How to Forecast the Weather

By E. B. "FARMER" DUNN

FORMERLY OF THE U. S. WEATHER BUREAU

CIRRUS clouds furnish one of the best means of foretelling weather changes. If the weather be fair, no change is likely to take place until these clouds appear. They give a warning of from twelve to twenty-four hours before wet weather sets in. They are the forerunners of all storms and move from a westerly or southwesterly direction, and from three hundred to five hundred miles in advance of the storm. If they move rapidly, the storm is approaching rapidly. If they drift along and the ends of their feathery whisps turn down, it is an indication that the weather is likely to continue fair, but if they turn up, rain or snow is to follow within twenty-four hours.

If they form in bands and lose their feathery appearance, it means high winds. If they form and dissolve, fair weather will continue for at least twenty-four hours. Cirrus clouds of "mackerel" formation foretell wind and rain and snow; with long streamers reaching upward, wind alone.

Cirro-stratus clouds usually precede rain or snow from twelve to twenty-four hours. They move from a westerly or southwesterly direction; the same direction from which the rain or snow or general storm centre is coming and are usually accompanied by high winds.

A mottled sky, with light drifting clouds, foretells fair weather.

Cirro-cumulus clouds are termed "fair weather clouds." In Summer they foretell dry, hot weather. When their small tufts merge into one another, several days of fair weather are due.

Cumulus clouds are considered fair weather indicators, but when they appear the day is generally warm and sultry and the clouds form during or shortly after the hottest part of the day. They are, also, the clouds that usually precede thunderstorms and are called "thunder heads."

They start close to the horizon with a low, flat base and grow and expand steadily into the upper air without the least sign of local storm development. They gradually rise higher and higher and become well rounded masses with beautiful domes. Then, if thunderstorms are to develop, there will appear fine, feathery Cirrus clouds distinctly separate from the Cumulus clouds. Soon the Cumulus will turn a dark gray and grow darker as they come nearer. From beneath the Cumulus cloud will shoot out a small, dark, threatening cloud which will rush forward with a great burst of wind and sometimes rain.

If wind comes before the rain the squall will be of short duration. If rain comes before the wind it may last an hour or two. The heavier the rain the quicker the squall passes.

Cumulo-stratus clouds form in the lower air strata. They assume something of a Cumulus formation, with a flat, extended base and a partially rounded, but ragged, broken top. They are Winter clouds and appear in cold, dry weather. They have a dark, threatening appearance, but are really heralds of fair weather. They dissolve in late afternoon or warmer part of the day.

Stratus clouds are the lowest of all clouds and, when resting over the land or water, are called fog.

When fog sets in before midnight the following day is likely to be rainy, but if fog appears in the morning after sunrise, the day will be fair.

Nimbus clouds are those from which rain invariably falls. They are without complete definition; a broken, confused mass being driven by the lower easterly winds.

A general increase of cloudiness at sunset means rain or snow.

Tufts of cloud forming a dappled or mottled sky indicate fair weather.

A fog, arising in the morning is the surest sign of a fair day.

Small, inky clouds indicate rain.

In cold weather, a bank of dark cloud forming in the north or west with a southerly or easterly wind indicates rain or snow.

An excessive clearness of the atmosphere is an indication of rain or snow to follow within twenty-four hours.

A low, overcast sky, with light northerly wind in Winter, foretells snow.

Ragged clouds moving rapidly indicate wind and rain.

Dew indicates a fair day. Wind or cloudy nights prevent frost or dew.

A yellow sunset foretells rain; a bright straw yellow, wind and rain, and yellow blending into orange, fair weather.

A red sunset, a fair day.
A red sunrise, a wet day.
A gray sunset, a wet day.
A gray sunrise, a fair day.
Dark Indian gray sunrise or sunset, rain.
Pale green at sunset, rain.

Combined green and red sunset or sunrise, probably rain.

A red disc at sunset means fair and warmer.

Cool wind over a warm surface or water, or a warm wind over a cool surface or water creates fog.

Sudden fall in temperature causes showers.

Sudden rise in temperature, fair weather.

High temperature and high humidity, thunder-storms.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

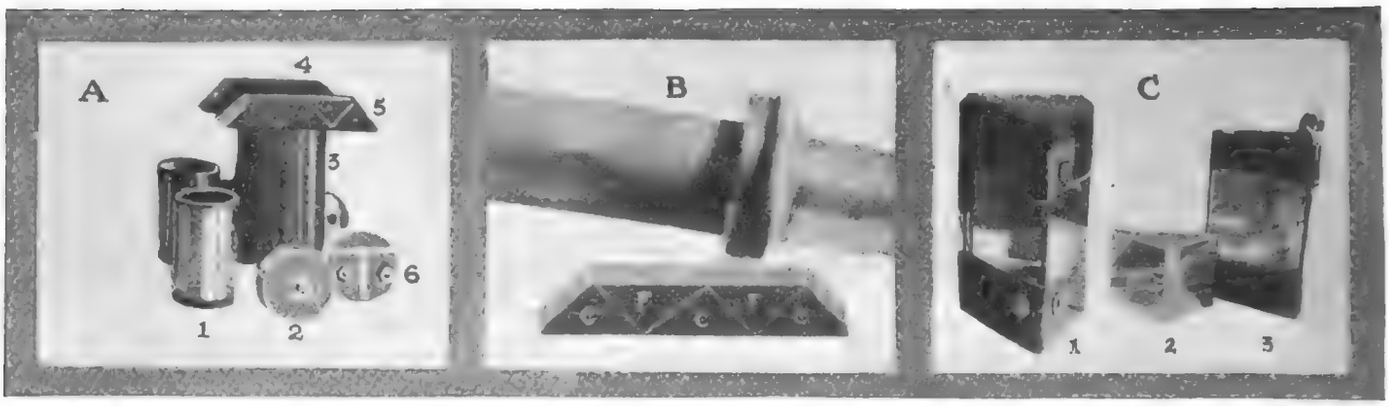

Parts of Portable Spectroscope. 1, Cell With Achromatic Lens; 2, Eye Cap; 3, Prism Tube; 4, Top; 5, Prism Series; 6, Adjustable Slit In Collimator Head.

Portable Hand Spectroscope Adapted To the Ocular System of a 4" Refractor, For Solar and Stellar Observation. C, Crown Glass Prisms; F, Flint Glass Prisms.

1, Dense 60° Flint Prism Mounted; 2, Borosilicate Crown Right Angle Prism; 3, Fluid Prism Made of Three Thin Lantern Slides and Filled With Carbon Disulphide.

Spectroscopes--How to Build Them

By C. E. BARNS

ONE of my apt pupils in reflector-building wrote me that when he first looked into the eyepiece of his instrument and saw the belts and moons of Jupiter, the rings of Saturn, the nebula of Orion and the crater of Copernicus, his wife thought he had "gone plumb crazy with joy!" First glimpses through a telescope upon which you have expended much time and labor give a thrill of delight not soon forgotten. But it remains for the spectroscope to absolutely dazzle one with a new world of mystery and beauty;

MAKING THE PRISM

A borosilicate 60° prism suitable for a table-spectroscope will cost some twelve or fifteen dollars; but the novice has two alternatives: the purchasing a two-inch blank prism for about three dollars and grinding and polishing it himself, or the constructing of one of three evenly matched pieces of thin clear negative glass by binding and cementing together with acetic glue so as to be absolutely water-tight, and filling with distilled water, or, better still (at least so far as the increased refractive and dispersive powers go), with carbon disulphide. In the latter case the prism should be well capped and corked, as this chemical is not only volatile and malodorous, but inflammable. If, however, this fluid prism is thoroughly cleaned with a solution of caustic potash distilled water affords a very interesting spectrum. Various liquids may also be examined in a fluid prism.





On the Left is Shown the Method of Forecasting the Weather By the Aid of the Bright Telluric Bands Near the "D" Line of the Solar Spectrum. At the Right the Spectrum and Its Various Lines Are Illustrated In Detail.

REQUISITES OF A TABLE-SPECTROSCOPE

The three requisites in a table-spectroscope system are: the prism, the collimator with lens and slit for producing the spectrum, and the telescope for viewing the same. The length of the collimator-tube should be approximately the focal length of the lens used to magnify the spectrum at the other end of the tube; and it is well to have the slit-device on a separate adjustable tube so that a clean line of light cuts the prism, is refracted and dispersed, and the emergent beam taken up and magnified by the telescope system placed at such an angle as will insure a sharp view of the famous Fraunhoefer lines. When pointed at the sun, these cut through the brilliant bands of color parallel thereto in myriad profusion. But, as the prophet saith, "the hairs of your head are numbered," so science has numbered and annotated every line and combination of lines in that vast orderly array—"the alphabet of the physical universe." Every one of the ninety-two known elements gives a distinct and separate spectrum, from hydrogen, the lightest, to uranium, the heaviest, in atomic weight when made incandescent in laboratory research and yet all are there in one combined solar blaze! It is well worth while to build a spectroscope just to behold this one amazing phenomenon.

The length of your tubes for collimator and telescope will depend upon the focal length of the double convex lens in the former and of the achromatic lens used in the latter system. It is well to have sliding ends to both so that accurate adjustment is possible—that the slit may cut a sharp image on the prism surface and the telescope take it up sharply beyond. Usually when the telescope is first focused upon some distant object, this is sufficient adjustment, but success depends largely upon a cleanly magnified image of the slit which is seldom more than a hair-line in width. The brighter the source of light the narrower the slit, so that it is necessary to have the jaws adjustable with set-screws in the collimator head. Any printer will supply you with a few inches of new hair-line brass rule which has almost a razor-edge and is even throughout. With this rule the jaws may be made, crossing the center of the hole in the collimator head, which should be small, not over three-eighths of an inch for a one-inch lens at the prism end, nor over three-quarters of an inch for a two-inch lens. This is the size I use with great satisfaction.

The blocks upon which the telescope and collimator are fixed should be bolted to the circular table with a single center bolt so as to turn at will. The prism should be mounted upon a separate circular table that not only turns from right to left, as occasion demands, but is also arranged so that it may be raised or lowered; for you are likely to try out prisms large and small—crown, flint, dense flint and fluid—and the matter of accurate adjustment is of great importance. An arm extending over the top of the prism will anchor it to the table in case you wish to tilt the system so as to catch the direct rays of the sun, for instance. In that event the jaws of the slit should be drawn together so that they almost touch. A moistened toothpick swept the length of the slit will keep it free from dust, else your spectrum will be imperfect.

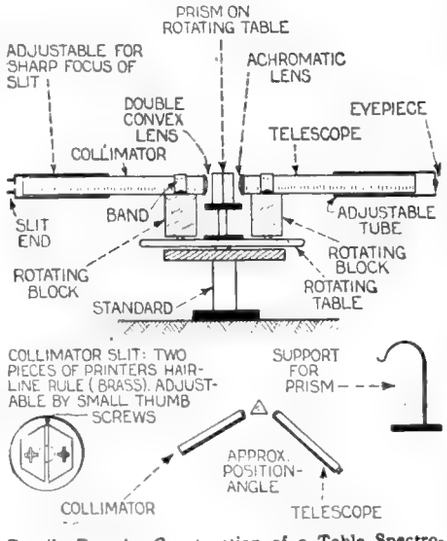

Details For the Construction of a Table Spectroscope Are Given In the Drawing Above.

USING THE SPECTROSCOPE

With such a table-spectroscope not only may the solar spectrum be examined with success, but the study of spectrum analysis may be undertaken with confidence. A Bunsen burner, spirit lamp or even a gas-jet turned very low (so as not to produce its own spectrum) may be employed to vaporize various chemical salts and so produce their individual spectra—for instance, salts of lithium, calcium, sodium, strontium, barium,

(*Continued on page* 483)

Digitized by Google
Original from UNIVERSITY OF CHICAGO

Man and the Stars

By J. S. DOW

IT is surely one of the strangest illustrations of the absorption of men in their own small affairs that most people are content to pass their lives without learning to identify the different stars, and are without curiosity as to the nature of the planets and the fixed stars. My own interest in the subject was awakened by the chance gift, as a prize at school, of Sir Robert Ball's popular work on "The Story of the Heavens." I was aware that the distance of the sun from the earth approached a hundred million miles. But it was a revelation to discover that Sirius, the most brilliant star in the Heavens, is roughly a million times as distant as the sun. I was equally impressed by the discovery that our own solar system, apart from the rotary motion of the earth on its axis and its course round the sun, is moving through space at a gigantic speed—that "every three days the solar system accomplishes a stage of about two million miles on its journey towards the constellation Lyra." Fortunately the distance of Lyra is comfortably great—so great that even at this express speed the journey would take at least a million years!

Is there any study more rich than astronomy in romantic discoveries and predictions? Is there anything in science more impressive that the prediction by Halley of the transit of Venus, which he knew he could not live to see, but which he foretold to the minute and commended to the attention of posterity? Again, can one imagine a coincidence (for it can have been nothing else) more strange than the account of the moons of Mars in Gulliver's Travels, (published in 1726). It was narrated that the astronomers in the Island of Laputa had keen vision and very powerful telescopes and had detected *two* moons of Mars. Now this was just 150 years before the existence of two moons of Mars, was ascertained, with great difficulty, by Professor Hall. These two moons have most curious properties. Having escaped detection for so long they are naturally small objects, only about 18 miles and 22 miles respectively in diameter. Interest attaches chiefly to the inner of the two satellites, which is only 4,000 miles distant from Mars, whose bulk must render it invisible during 2/3 of its period in the most favorable circumstances; it is never visible at the poles. The most singular thing about this inner moon is that, whereas Mars, like the earth, rotates on its axis in about 24 hours, the period of revolution of this moon is only 7 h., 40 min.—a circumstance believed to be unparalleled in the solar system and quite unforeseen by astronomers. The rapid motion of this moon would be evident to an inhabitant of Mars; it would in fact appear to travel visibly like the clockwork driven moons occasionally seen on the stage. Strange to say in Gulliver's Travels this singular short period of one of the moons was also predicted, the period being given as about 10 hours—a remarkably close guess!

It is also interesting to observe how often scientific discoveries, apparently only of academic interest, eventually prove to have a direct and practical bearing on human affairs. Our knowledge of the constitution of distant suns is derived chiefly from the spectroscope which enables us to identify arrangements of spectral lines characteristic of known elements. Thus we have learned that most of the familiar terrestrial metals are present in the sun. Not only this, but the spectroscope enabled the existence of a new element, helium, to be detected in the sun before it was known to exist on our earth. It is related that when a popular lecturer was enthusiastically decribing this incident, a voice at the back interrupted the proceedings by the bored inquiry "Who *cares* whether there's helium in the sun or no?" Ultimately, as is now well known, helium was discovered by Sir William Ramsay as a minute constituent in the earth's atmosphere, isolated with great difficulty and in very small quantities. Afterwards it was discovered that helium could be produced on a commercial scale from certain natural gas in Canada and the United States. Shortly before the Armistice sufficient was accumulated to fill the envelopes of airships with this "rare" gas, which had the great advantage over hydrogen of being non-inflammable.

One picturesque possibility that has arrested the attention of writers of fiction is the sudden arrival in our solar system of a strange planet. Mr. H. G. Wells has written a story in which the consequences of such an invasion are graphically told. Some concern was expressed in the daily press a few years ago at the birth of a new star in the Heavens whose growing brightness led to the conjecture that it was moving rapidly towards the earth. If such an approach of a planet ever came to pass, the Astronomer Royal would become the most important expert in this nation. True he could do nothing to ward off the catastrophe, but he might be able to predict the probable course of events, and at least inform us of the period which was to elapse before serious trouble would be experienced. The immense distance from which such a foreign earth would probably have to travel is a comforting circumstance. Speaking generally it would appear that any incipient or threatened invasion of our solar system by a body, large enough to have any material effect, would be, in its initial stages, a very gradual process.

The study of the stars confirms the age-long philosophical conception that time and space are only modes of thought—that to someone in a larger scheme of existence our terrestrial distances are as naught, and a few thousand years of the earth's history but a flash of time. Throughout the universe dimensions of time and distance correspond. As we have to deal with larger bodies and greater distances traversed, so the period of time increases and demands larger units. This was most vividly illustrated a few years ago in a work by Mr. E. Fournier d'Albé, who contrasted the motion of the planets round the sun, with the similar motions, on a far more minute scale, of the electrons that circle round the central nucleus of the atom. The conception of an atom as the smallest particle of matter has of course been greatly modified since the acceptance of the electron theory. We now know that an atom is itself a complex system. To us the period of revolution of the electron round the atomic centre appear infinitesimal, the distance of the electron from the nucleus round which it revolves exceedingly minute. This small scale of magnitudes he named the "infra-world."

But may there not exist also an "ultra-world," to the inhabitants of which our times and distances would seem as infinitesimal as those in the infra-world appear to us? This leads to a new conception of space for which there seems to be some scientific justification. One is prone to imagine that space is occupied by constellations scattered at immense distances and more or less regular intervals, and this condition continues indefinitely as space is extended. But the greater refinements of modern astronomical observations suggest that this is not the case. Apparently there exists an outer void where no more constellations are found but merely untenanted space. It may therefore be conjectured that our universe is merely an isolated system, separated from other similar universes by distances immensely greater even than those dealt with in ordinary astronomy. We are thus led to the conception of an ultra-world comprising a multitude of universes—each forming an object as minute in this ultra-world as are the atoms of our own earth. We may also picture an "ultra-ultra world", in which the ultra world itself becomes a minute, almost infinitesimal object, and indeed an infinite succession of such worlds, each but a small object in the next greater.

Another ingenious speculation of Mr. Fournier d'Albé may be recorded. We, on this earth, can control and rearrange the atoms. When we perform a chemical experiment atoms enter into new combinations and their life as elemental mocules comes to an end—that is sudden, according to our notions of time for the change appears to take place practically instantaneously. But to an inhabitant of the infra-world the change would not seem sudden at all. It would be a gradual process spread, perhaps over many "centuries" of the infra-scale of time. Similarily in the ultra-world we may conceive a Power bringing about changes in our universe executed in a flash of ultra-time but in our eyes proceeding so slowly as almost to escape detection. The "end of the world" then would come to us, not as has been commonly supposed like a flash of lightning, but as a slow and almost inappreciable change, which is yet merely a momentary incident to the ultra-intelligence responsible. Here again, curiously enough, there seems to be some scientific justification for this conception of the end of the world. Possibly, therefore, in these minute changes we have the first faint indication of the final destiny of our universe.

MR. J. S. DOW of London, England, who is the author of this article, has delved deeply into the infinite. He has treated the infinitely small and infinitely large in a manner, that will be intelligible to everyone. The topic and its treatment follow the lines of some of our Editorials that have appeared in past issues.

Is there an ULTRA-WORLD and an INFRA-WORLD?
The present article will suggest answers to this two-fold question.

—EDITOR.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

Tantalum--All About It

By O. IVAN LEE, B.Sc.

FOREWORD

THE Great War focused the attention of the world upon the transcendent importance of the rarer metals and was reflected in the feverish activity to find and produce them so as to confer their marvelous virtues upon

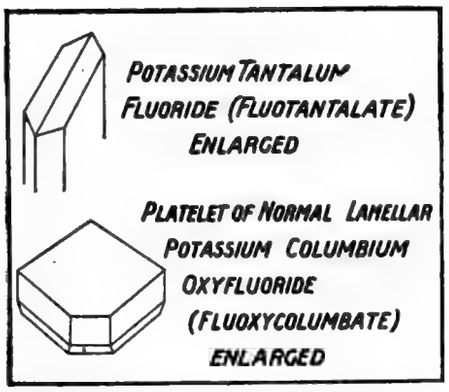
POTASSIUM TANTALUM FLUORIDE (FLUOTANTALATE) ENLARGED
PLATELET OF NORMAL LAMELLAR POTASSIUM COLUMBIUM OXYFLUORIDE (FLUOXYCOLUMBATE) ENLARGED

Above Is Shown the Striking Difference In the Appearance of the Salts of Tantalum and Columbium, By Means of Which the Former Is Purified.

alloys for military purposes, ranging from lathe tools to armor plate. Today, tungsten, molybdenum and vanadium are almost household words. But tantalum is a stranger to most of us. Your pragmatic chemist friend may recall with some effort that it is indeed a rare metal—of some academic interest—but will shake his head if pressed for details by the curious. No, he doesn't know what it looks like, and it isn't good for much anyway!

Because of the difficulties inherent in its production on a commercial scale in a pure state, metallic tantalum has remained a laboratory curiosity, and little has been available except occasional foreign material of fluctuating composition and variable properties. As a consequence, metallurgists and chemists have had but limited opportunities to explore the possibilities offered by an adequate supply of this remarkable metal.

After several years of intensive experimenting under the capable direction of Dr. Balke, practical results have been attained and ductile metallic tantalum of great purity is now an industrial reality. Noteworthy results have already been attained, but the technical world is convinced that far more interesting results lie "just around the corner."

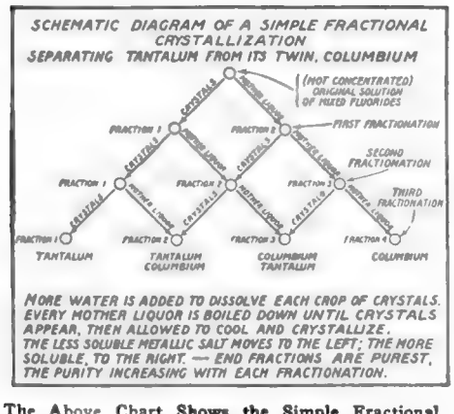
SCHEMATIC DIAGRAM OF A SIMPLE FRACTIONAL CRYSTALLIZATION
SEPARATING TANTALUM FROM ITS TWIN, COLUMBIUM
(HOT CONCENTRATED) ORIGINAL SOLUTION OF MIXED FLUORIDES
FIRST FRACTIONATION
SECOND FRACTIONATION
THIRD FRACTIONATION
FRACTION 1
FRACTION 2
FRACTION 3
FRACTION 4
CRYSTALS
MOTHER LIQUOR
TANTALUM
TANTALUM COLUMBIUM
COLUMBIUM TANTALUM
COLUMBIUM
MORE WATER IS ADDED TO DISSOLVE EACH CROP OF CRYSTALS. EVERY MOTHER LIQUOR IS BOILED DOWN UNTIL CRYSTALS APPEAR, THEN ALLOWED TO COOL AND CRYSTALLIZE. THE LESS SOLUBLE METALLIC SALT MOVES TO THE LEFT; THE MORE SOLUBLE, TO THE RIGHT. — END FRACTIONS ARE PUREST, THE PURITY INCREASING WITH EACH FRACTIONATION.

The Above Chart Shows the Simple Fractional Crystallization Which Occurs When Separating Purified Tantalum Salt From Its Neighbor Columbium Salt.

HOW TANTALUM WAS MADE KNOWN TO THE WORLD AND HOW IT CONFOUNDED THE EARLY CHEMIST

It was in the year 1802 that the Swedish chemist Ekeberg announced that while endeavoring to unravel the nature of a queer black mineral from Kimito, Finland, he encountered most discouraging obstacles in his efforts to get it into solution. The metal assumed to be present, although resembling tin, tungsten and titanium, was yet none of these, but a new element, "because even in the midst of acid it was unable to take the liquid to itself." In playful allusion to these *tantalizing* difficulties, he named the novel substance "tantalum" from that legendary unfortunate, Tantalus, whose thirst, you recall, was only exceeded by his inability to quench it.

Tantalum

THE accompanying article by Mr. Lee, well-known analytical chemist, describes the occurrence, mining and the latest methods of refining tantalum, one of the rarer elements which bids fair to enter the field of industry to an extent not dreamed of heretofore. Pure tantalum is one of the heaviest metals introduced into commerce, being 16.6 times as heavy as an equal volume of water, or half again as heavy as lead. It posseses a very high resistance to corrosion, and may be used in the place of platinum for many purposes including jewelry, laboratory utensils and standard weights.

The melting point of tantalum is more than a 1000° C above that of platinum. This astonishing new metal is unaffected by the king of solvents, aqua regia, which dissolves gold and platinum. Tantalum is readily made very ductile and can be rolled or drawn into rods, sheets or wire. It may be lead through and sealed in glass like platinum, having the same coefficient of expansion as glass. A tantalum electrode with a lead or other electrode placed in an electrolyte solution, results in an ideal rectifier for converting alternating to direct current, the tantalum electrode lasting indefinitely.

By a new process commercial tantalum of a very pure quality is now available, and it can be used for making non-rusting pens, fine tools, surgical and dental instruments and jewelry. In the electrical field tantalum promises to find considerable use as filaments for special lamps and radio vacuum tubes, for use in electric heaters and resistance furnaces, for leads in glass lamp bulbs, for grid and plate electrodes, in radio and X-ray tubes, lightning arrestors, electrolytic condensers, as well as for anodes and cathodes, for deposition of metals, such as silver, copper and gold. When alloyed with other metals it yields some very interesting and valuable results.

TANTALUM MINERALS AND ORES; WHERE THEY ARE FOUND.

Today some thirty different mineral species are known to contain tantalum to a noticeable degree, but the great majority of these are merely of scientific interest and found only in public and private mineral collections.

They occur principally in granite rocks, the economically important ores being limited to a scant three or four, and of these, only tantalite is continuously utilized as a source of raw material, particularly the variety manganotantalite.

Although of infrequent occurrence, tantalum ores are comparatively abundant in certain favored localities.

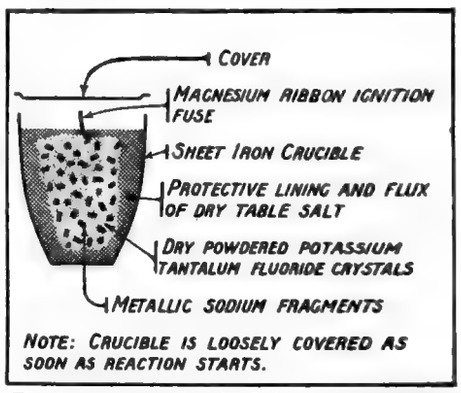
COVER
MAGNESIUM RIBBON IGNITION FUSE
SHEET IRON CRUCIBLE
PROTECTIVE LINING AND FLUX OF DRY TABLE SALT
DRY POWDERED POTASSIUM TANTALUM FLUORIDE CRYSTALS
METALLIC SODIUM FRAGMENTS
NOTE: CRUCIBLE IS LOOSELY COVERED AS SOON AS REACTION STARTS.

The Arrangement For the Laboratory Production of Metallic Tantalum.

Sixteen pound crystals of columbite, often associated with tantalum, have been found in Little Namaqualand, South Africa; pieces of samarskite up to twenty pounds have been found in the Wiseman Mine, North Carolina; in the Indian mica mines, the same mineral occurs, some pieces weighing several hundred pounds; seven miles west of Cañon City, Colorado, columbite is stated to have been found in large masses up to six hundred pounds; in the Bad Lands of South Dakota, similar deposits weighing a ton, and rich tantalite is relatively common in the tin-fields and gold fields of Western Australia. The tantalite from the Antipodes as a rule runs higher in tantalic oxide than the American, averaging 60% as against 25% for our native ore.

It would seem likely, too, that the mixed radioactive minerals now mined in Madagascar should yield tantalum as a by-product.

NATURE'S EXTRAORDINARY PARALLEL

Most amazing of all the tantalum minerals, is *native metallic tantalum* whose discovery was announced in 1909 in gold washings in the Ural Mountains of Russia. It is a

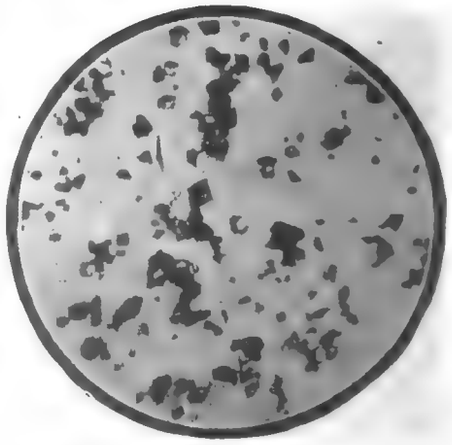

Microphotograph of Native Tantalum. (Enlarged 500 Diameters.) Courtesy of P. Walther.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

bright greyish-yellow minutely crystalline powder analyzing 98.5% of tantalum and 1.5% of columbium, and is probably the rarest of all naturally occurring metals. A year later, it was also reported from the Altai Mountains in Mongolia, lacking columbium but with a trace of gold. One cannot avoid speculating how such material came into existence—whether it represents a minute survival of primeval tantalum which gradually became degraded to the multitudinous tantalum minerals, or whether nature, in a confidential mood, threw out this little hint just to encourage man in his efforts to duplicate her feat. The suppression of columbium only deepens the mystery.

THE PIONEER PRODUCTION OF METALLIC TANTALUM

Even before the compound nature of the acid resistant material obtained from tantalite was recognized, attempts were made to isolate the metallic "tantalum" from it, in fact, almost one hundred years ago, Berzelius described the first product of this character made from potassium "tantalum" fluoride by reduction with metallic potassium, which process was then a comparatively new weapon in the chemists' hands. Needless to say, the "tantalum" thus produced was a very crude material and anything but metallic in appearance, being merely a black heavy powder which judging from its low specific gravity (10) contained only about 60% of metal. Nevertheless it was a beginning to have produced anything with tantalum in it, and although the properties of this substance were a miracle of divergence from what we know of tantalum today, yet it gave the world some conception of what might ultimately be expected.

MODERN METHODS OF MANUFACTURING TANTALUM

The method just described is still of more than theoretical interest, inasmuch as with certain modifications it may be utilized for making a product of genuine value. The cheap metallic sodium is substituted for the expensive metallic potassium, the tantalum salt being alternated with layers of small pieces of the sodium, in an iron crucible, the whole being topped with ordinary table salt, which, melting from the heat of the reaction, serves as a protective covering. The reaction is started by heating strongly at one point, but once on its way, requires no further aid, and the sodium burns vigorously.

On cooling and digging out the contents of the crucible, a porous grey material is found, interspersed with beautiful violet colored crystals of salt, sparkling like little amethysts. Unfortunately, they soon fade on exposure and disappear on contact with water. As fragments of unconsumed sodium are apt to be present, the precaution is taken of first destroying this by covering the contents of the crucible with denatured alcohol until disintegrated. When the bubbling has ceased, the residue is very thoroughly washed first with water, then with a mineral acid and water again. In this way, salt and other soluble impurities are eliminated and the tantalum is left as a dense heavy black powder. In spite of the protection afforded by the molten salt, much of the tantalum finds an opportunity to combine with the air since tantalum easily unites with both oxygen and nitrogen; and it is the presence of these omnipotent gases which renders the tantalum made as just described impure and valueless. The great importance of excluding air was under-estimated by many of the pioneer workers with tantalum, or rather, the extraordinary power possessed by hot tantalum of absorbing or combining with inert and even reducing gases, was not realized. On this account it is more satisfactory and practicable to exclude any and all gases *by carrying out the whole operation in a vacuum.* The powder thus produced looks like that made by the old procedure, but in reality is far purer. It is now strongly compressed and heated, and finally melted in a vacuum at the high temperature of the electric furnace. This last treatment not only consolidates the metal, but expels any slight remaining impurities, resulting in tantalum at least 99.5% pure. Such material is capable of being drawn into fine wire, rolled into thin sheets and taking a mirror like polish.

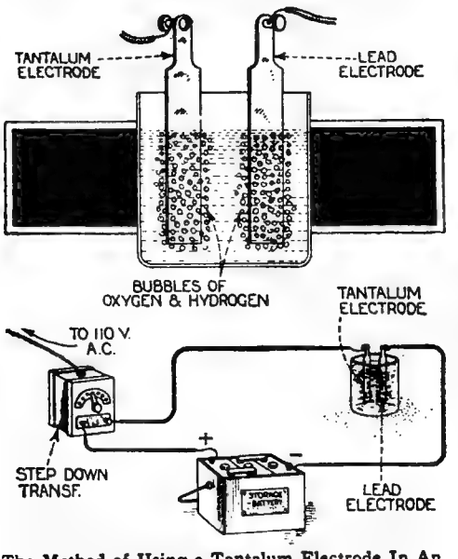

The Method of Using a Tantalum Electrode In An Electrolytic Rectifier In Charging a Storage Battery.

This great advance in the art of producing useful tantalum was announced in 1905 by Dr. Von Bolton, head of the chemical laboratory of the great German electrical firm of Siemens and Halske. Simultaneously, the incentive was revealed with a description of its successful use for electric lamp filaments, in line with the general theory that that filament would give the best economical results which could be maintained for the longest time at the highest temperature. Although eventually superceded by the more efficient tungsten, these lamps have the low energy consumption of between 1.5 and 2.5 watts per candle power. In passing, it is well to remember that a pound of tantalum would make many thousand lamps, so that primarily von Bolton's feat may be taken as marking an epoch in quality rather than quantity production.

The more intricate problem of quantity production was ultimately mastered in 1922 by the Fansteel Products Company of North Chicago, the purity being greatly enhanced at the same time.

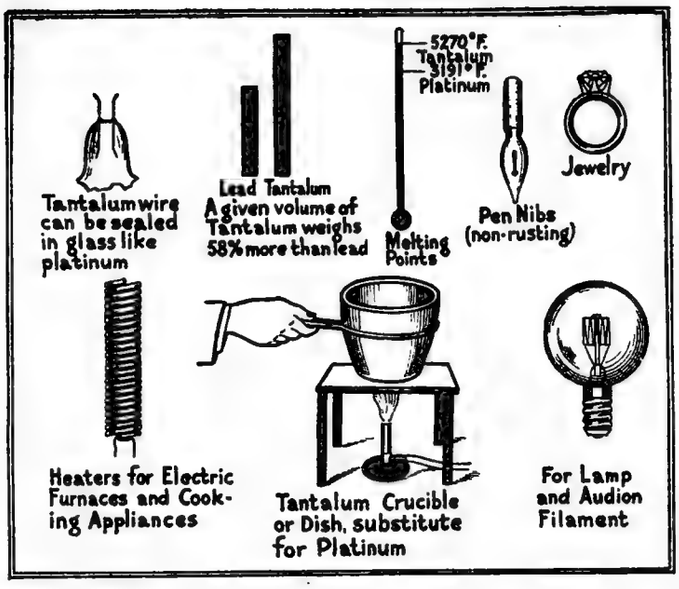
5270°F. Tantalum
5191°F. Platinum
Tantalum wire can be sealed in glass like platinum
Lead Tantalum
A given volume of Tantalum weighs 58% more than lead
Melting Points
Pen Nibs (non-rusting)
Jewelry
Heaters for Electric Furnaces and Cooking Appliances
Tantalum Crucible or Dish, substitute for Platinum
For Lamp and Audion Filament

Some of the Many Uses of the Metal Tantalum Are Shown In the Illustrations At the Right. Tantalum Will Take the Place of the More Expensive Platinum and Gold In Many Cases and One of Its Greatest Features Is That It Has the Same Co-efficient of Expansion As Glass. Therefore, It Can Be Sealed Into Glass Vessels In a Similar Manner To Platinum. It Also Has An Extremely High Melting Point, Being Much Higher Even Than Platinum. When Alloyed With Other Metals, It Presents Some Interesting Results.

We may now well consider in some detail the very unusual physical and chemical properties of this recalcitrant metal whose devious history we have traced to the goal of making it an article of commerce. It is not often in these days that a metal of such novel characteristics is offered to the world, and still less frequently that it is of an elementary and distinctive nature, and not simply a clever hybrid of metals already well known and which consequently partakes a little of the qualities of each. It is fundamental to understand, then, that pure tantalum is as individual as gold, copper, lead and nickel and not a shifting alloy like brass and bronze, and exhibits peculiarities never before realized in any metal.

THE REMARKABLE PHYSICAL AND CHEMICAL PROPERTIES OF DUCTILE METALLIC TANTALUM

In appearance, tantalum resembles tool steel and platinum, the resemblance to the latter being so close that there is little doubt that it could be substituted in jewelry without the wearers ever being aware of the difference. For economic as well as sentimental reasons, however, it is doubtful if tantalum will ever become popular in this rôle. A thin sheet, when rolled and polished, has all the rigidity of hammered platinum foil. It is a comparatively hard metal, too, and in the purest state unites the hardness of the best medium steel, with a greater toughness and ductility than is known to be possessed by any other metal. Moreover, it can be drawn, rolled, beaten and in general worked by the same processes used with other metals.

Wrought tantalum is one of the heaviest metals ever introduced to commerce, being 16.6 times as heavy as an equal volume of water, or half again as heavy as lead. This coupled to its resistance to corrosion, has suggested it as being well adapted for standard weights.

Although the melting point is over 1,000 degrees Centigrade higher than that of platinum, it does not remain unaffected to the same extent on heating. At 400 C. the metal becomes blue, at 600 C., greyish black, and at still higher temperatures slowly oxidizes and burns. Towards chemical action, on the other hand, it is almost equally resistant although in divergent ways. It is attacked by hydrofluoric acid and mixtures containing this acid, but against this drawback we may balance the astonishing fact that *it is quite unaffected by "The King of Solvents," aqua regia,* which readily dissolves platinum. This renders it very suitable for the determination of gold and platinum by electrolytic deposition since they may thus

(*Continued on page* 499)

Digitized by Google
Original from UNIVERSITY OF CHICAGO

Birds That Had Teeth

By CARROLL LANE FENTON

Dept. Paleontology, University of Michigan

FIFTY million years or so ago, during the Cretaceous or Chalk period of the earth's history, much of North America was covered by broad, shallow seas that were dotted with low and almost barren islands. And upon these islands nested some of the strangest of all the thousands of odd creatures that have lived in past ages—birds that could not walk, and that had long beaks armed with sharp teeth.

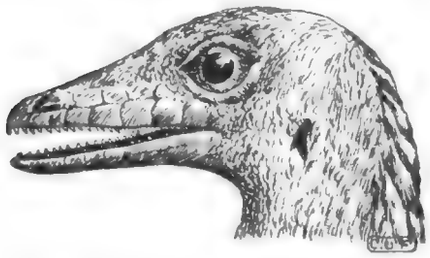

The Head of Archeopteryx, the "Father of Birds," Showing His Sharp Teeth.

These birds, like the other beings of ancient times, are known from their skeletons, which have been preserved and turned into stone in the chalk beds of western Kansas. These chalks once were muddy oozes lying at the bottom of the old sea. Whenever one of the birds died, and its bones sank to the bottom, they were covered by the ooze, and so preserved from destruction. They lay there for millions of years, while the sea disappeared, and the mud became solid rock. Today they are dug up by the collectors in the service of museums and universities, shipped hundreds or thousands of miles, and carefully taken from the rock which surrounds them. Then they are studied by paleontologists, and finally the bones are set up in as nearly as possible the attitude which they had during life.

Hesperornis, the *western bird*, as this ancient dweller of Kansas has been called, measured nearly five feet from the tip of his beak to the tip of his toes. In shape he was a good deal like the black and white Loon, or *hell diver* of modern rivers and lakes, but unlike that bird, he swam by means of his legs and feet alone, never trying to use wings. Indeed, he could hardly have done so, for after ages of disuse, his wings had disappeared entirely, and there remained but a few bones to show where they once had been.

But Hesperornis did not suffer any on this account, at least while he was in the water.

At the Right Will Be Seen the Hesperornis, the "Western Bird" on the Shore of an Ancient Kansas Island. This Bird Shows Distinct Teeth as May Be Seen.

His stout legs and paddle-like feet were all he needed to get about, either on the surface or below. Probably he swam lazily along until he saw a fish, and then, with a turn of his powerful feet, dived after it like an arrow. His body was shaped like a submarine, while his neck had the driving force of a heron's. Once a fish was caught in the bird's long beak, with its backwardly directed teeth, it had no chance to escape. It was swallowed promptly and Hesperornis went back to search for other victims.

However, the speed and grace of this toothed fisherman deserted him when he went ashore. His body was so long, his legs were placed so near his tail, and his feet were so perfectly fitted for swimming that he was out of place except in the water. Probably he could sit erect, even though with some difficulty, but for him to move about was almost out of the question. The very best he could do was to lie flat on the ground and wriggle awkwardly along with his legs sticking out behind. Anyone who has watched the clumsy twistings of a seal out of water can form a fair idea of the way

in which Hesperornis must have moved. It was very fortunate for him that the little Cretaceous islands held almost no flesh-eating animals; had they done so the life of Hesperornis would have been very short, had he been able to exist at all.

Although Hesperornis was the first bird *known* to possess teeth, he was by no means that first one that *did*. A few years after the remains of the *western bird* were collected in this country, a second skeleton of the most ancient bird of all, the *Archeopteryx*, was found, and it too had teeth.

Unbreakable Glass of the Future

MODERN researches for a hard but unbreakable glass really began in the year of 1774, when de la Bastie began to cool red-hot glass slowly and produced glass by his method which could be thrown violently to the ground without breaking. Another sort of glass has the quality of resistance to abrupt changes of temperature.

There are two sorts of quartz-glasses, the one the product of rock-crystal, the real transparent quartz-glass; the other untransparent, the product of rock-flint. Melting pots, tubes, clubs, flasks, refrigerators, evaporating basins, different fittings for electrical purposes and many other products for electric lighting are made of it.

The most remarkable quality of the quartz-glass is its very small coefficient of heat expansion, it only amounts to 0.00000059, in different words: whether one heats quartz-glass extremely—or whether one cools it extremely—it barely expands or contracts. Practically its size remains the same. Such glass can be heated red-hot and dipped while red-hot into cold water without cracking. It is this quality which has helped it to such ready admission into the technical and chemical laboratories. Besides

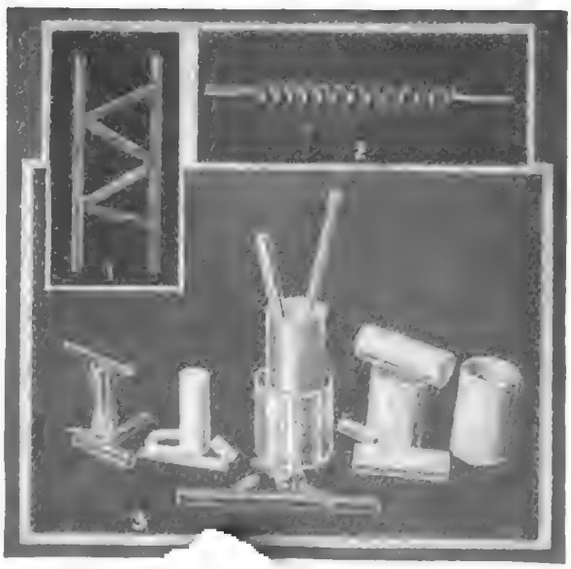

In the Photographs at the Left, 1, Shows a Triangle for Chemical Purposes, 2, a Tube in Serpentine Form and 3, Various Sizes of Glass Tubes. All of These Objects Are Made of a Difficultly Breakable Glass.

this it shows still quite a number of valuable qualities: the firmness of quartz-glass against breaking amounts to 12 kilogramme per square millimeter compared to 4.9 kilogramme for porcelain and 1.0 to 4.0 kilogramme for ordinary glass.

DR. ALBERT NEUBERGER.

Digitized by Google

Original from UNIVERSITY OF CHICAGO

Camera Obscura for Public Use

By LEWIS YEAGER

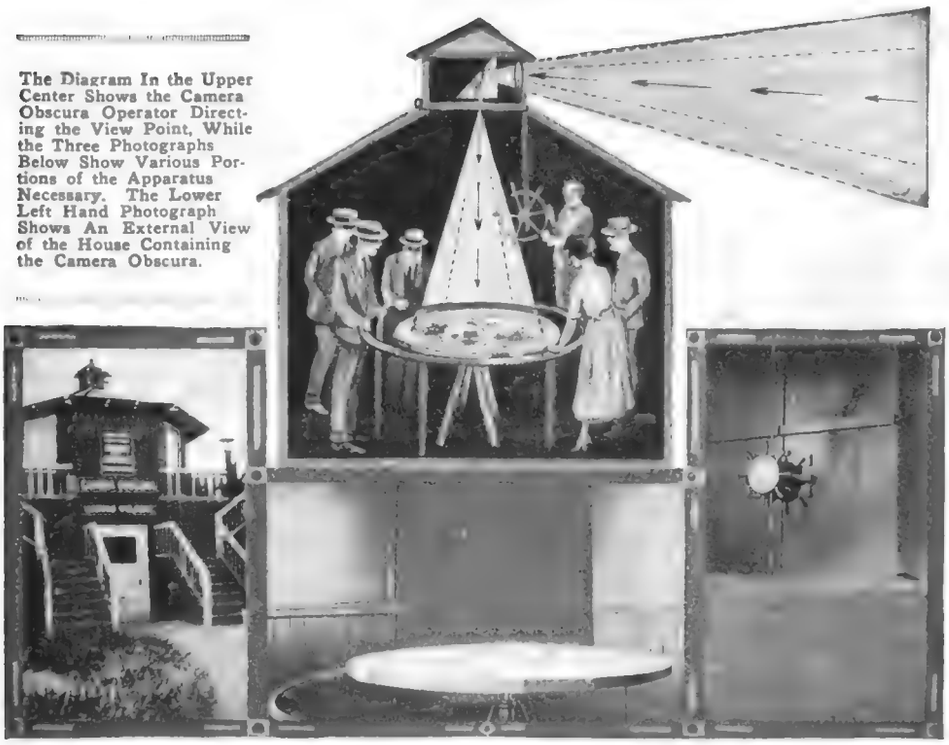

The Diagram In the Upper Center Shows the Camera Obscura Operator Directing the View Point, While the Three Photographs Below Show Various Portions of the Apparatus Necessary. The Lower Left Hand Photograph Shows An External View of the House Containing the Camera Obscura.

THE elaborate camera obscura at Santa Monica, Calif., is maintained for visitors and has an ideal location. The instrument requires sunshine and scenery and it is surrounded by both. The construction of the camera obscura is founded on the fact that the rays of light, when focused on a plane either by being passed through a small hole or by a converging lens, form an image of the objects from which they originally proceeded.

This may be readily tried by piercing the shade of a dark room with a small hole, and holding a piece of white paper within a short distance of it. It will be noticed the smaller the hole the more distinct is the image.

The discovery of the camera obscura is credited to Porta and strange as it may seem this places it as far back as the seventeenth century. Porta found that if the opening were filled with a convex lens the arrangement would make the image more distinct and far more brilliant.

HOW THE CAMERA OBSCURA WORKS

For those who do not know the application of the principle other than seen in the camera we include the following description:

Camera obscura means a dark chamber. As the name implies, it is a closed space from which the light is excluded. There is, however, a small aperture which admits rays of light. The rays proceeding from external objects, and entering by this aperture, form on the opposite side an image of the objects in natural colors.

Since it is often convenient to have the image produced upon a table the lenses are sometimes placed above the structure. To elucidate:

A brass case is at the peak of the roof which is conical or pyramidal as a rule, and this case holds the lenses. A triangular prism, which may be cut so as to act as a condensing lens separates a mirror set at 45°—one of the faces may be plane and the other may have such curvature that the combined refractions on entering or emerging from the prism produce the effect of a lens, while the flat side reflects the rays vertically downward on a table.

Those desiring to erect a camera obscura are advised to experiment with lenses and mirrors before finally constructing the parts for the structure.

A visitor at the Camera Obscura at Santa Monica, said to be one of the most complete in the world, and maintained at public expense, enters by a door which is closed after him. This leaves one in a six cornered dark room a dozen feet in diameter.

The roof of the room is peaked and at its center is the lens which can be rotated so as to point in any direction desired. One does not look in every direction at the same time as the lens only gathers the image from one direction.

One of the visitors turns a wheel arrangement connected by rods and a bevel gear to the lenses in the peak of the roof. This turret turns in any direction. The room is absolutely dark.

The sun then reflects a beautiful image in natural colors on the circular screen which occupies a position in the center of the room. The table may be tilted as desired. Not a detail of a breaker on the shore or of a motor car coming down the street is lost if the sun is bright. The colors are natural and no painter could duplicate the ocean scene, the waving palms, the palisades, the mountains in the distance or a thriving city street scene.

Liquid and Solid Hydrogen in Quantity Production

By S. R. WINTERS

HYDROGEN — the lightest substance known—is now being transformed into both liquid and solid states in quantity production. This is not a new scientific achievement of itself, but Dr. C. W. Kanolt of the Low Temperatures Laboratory of Uncle Sam's Bureau of Standards at Washington, D. C., is probably the first person in the world to devise a method whereby gaseous hydrogen may be converted into a fluid and a solid dependably and in any desired quantity. Two liters of liquid hydrogen may be manufactured each hour without experiencing much difficulty from clogging of the machinery, and the fluid can be readily changed to a solid by rapid evaporation of the liquid in a partial vacuum.

The apparatus for transforming this colorless, tasteless, and odorless gas into a fluid and, subsequently, to flakes resembling snow or ice, is essentially a

(*Continued on page* 493)

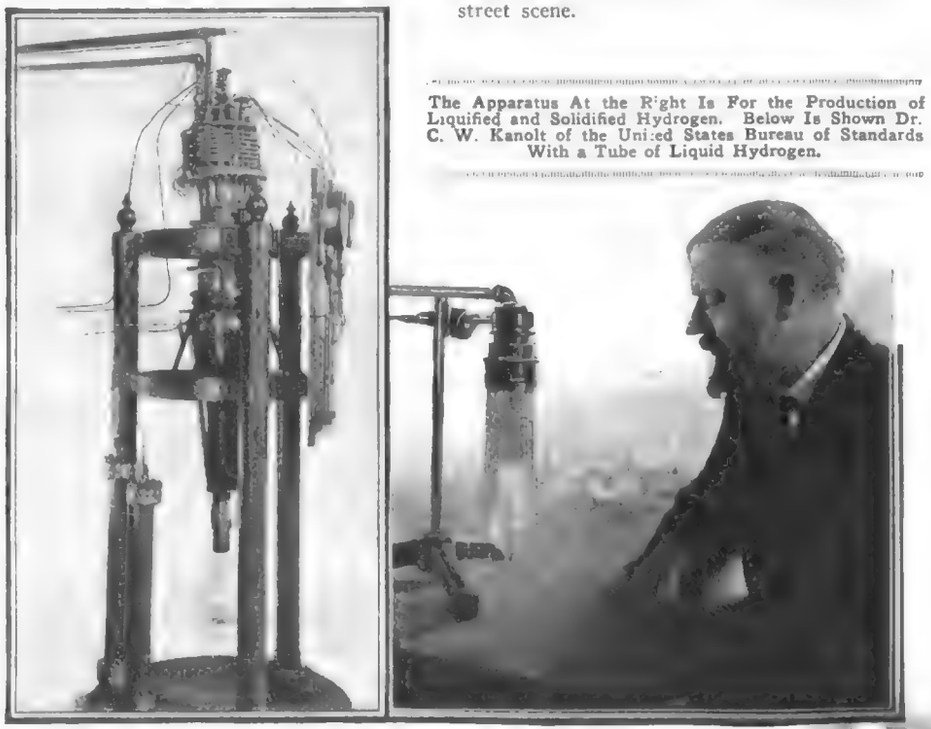

The Apparatus At the Right Is For the Production of Liquified and Solidified Hydrogen. Below Is Shown Dr. C. W. Kanolt of the United States Bureau of Standards With a Tube of Liquid Hydrogen.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

Luminous Water Signs

A FRENCH inventor has recently devised a kind of animated advertisement which is quite novel, and which in interest and originality seems to surpass all the processes and systems hitherto employed for attracting the curiosity of passers-by.

It is based on an optical illusion, which has not yet been fully investigated, and which gives in an attractive fashion the impression of water in continuous movement. It comprises a moving transparent object brilliantly illuminated and the animated advertisement apparently in high relief. The transparency which can be placed directly upon the glass of the show window, or even in the interior of the store, consists of a subject painted on glass, or of an advertisement glued thereon, illuminated from the rear by means of a special installation, and in front by the general illumination of the store. Some parts of the presentation judiciously selected, are specially lit and given an apparent movement, thanks to an exceedingly simple arrangement which will be described below. Finally the whole can be accompanied by illuminated captions, which also can be animated.

The animated advertisement produced in relief is composed of natural objects, whose apparent movements agree exactly with their presumable nature.

It is extremely difficult to describe the impression of motion which such objects give, and it is quite necessary to have seen at least once a picture of this kind in action to really take in the effect produced.

We propose, following the lines of the inventor of this arrangement, M. L. Masson, described in *Sience et la Vie*, to try to explain this phenomenon by describing its causes. The movement, or rather appearance of movement, is obtained without any mechanism. It consists in circulating within glass tubes at a constant speed, what may be called a string of beads formed of drops of water which may be colored or not, with bubbles of air between them of about the same dimensions.

In the illustrations are shown examples of such animated advertisements in relief. The moving parts are contained within glass tubes, but when the system is in action the tube becomes indistinguishable because it is transparent, while the moving beads, as we have termed them, are what the eye sees. The eye follows the movement of the liquid pearls, and is attracted by this interesting and graceful spectacle, while the observer is puzzled in his attempts to account for the effect produced. The illusion is so complete that it would seem as if the tube is in constant motion. One has to touch it with his hand to realize that it is stationary. In the other system of transparency a different phenomenon appears, but one just as curious.

The apparatus is composed of a glass screen on which is glued or painted the image, leaving transparent the design which is to be animated. It is placed before a grating built up by a series of horizontal tubes spaced at regular intervals and parallel to each other, through which the water circulates, the beads in each tube moving in the opposite direction to that followed by those in the adjoining ones. At the back of the screen or at the sides, the illuminating system is installed.

The screen being in position, the beads do not show except at the transparent spaces, so that the succession of moving droplets attracts the eye and forces it to follow the movement, until as the beads disappear behind the opaque portion of the panel, others catch the eye; some being in the tube above or below, go in the opposite direction. An optical effect is produced which it is quite impossible either to imagine or to describe. The eye, attracted first by one and then by another of the stream of luminous beads going some to right and some to left, sees a design which seems to oscillate perpetually before it. For according to the thickness and layout of the transparent portions, the design which they form seems to undulate, twist, turn, dance, sparkle, and even flame up in a way altogether curious and picturesque for which no comparison can be found.

The effect obtained is pretty and varied, and is in the highest degree amusing.

The process employed for producing the beads consists in having water or any colored liquid, fall drop by drop, governed by a cock, into a tube of glass, of which one

(*Continued on page* 496)

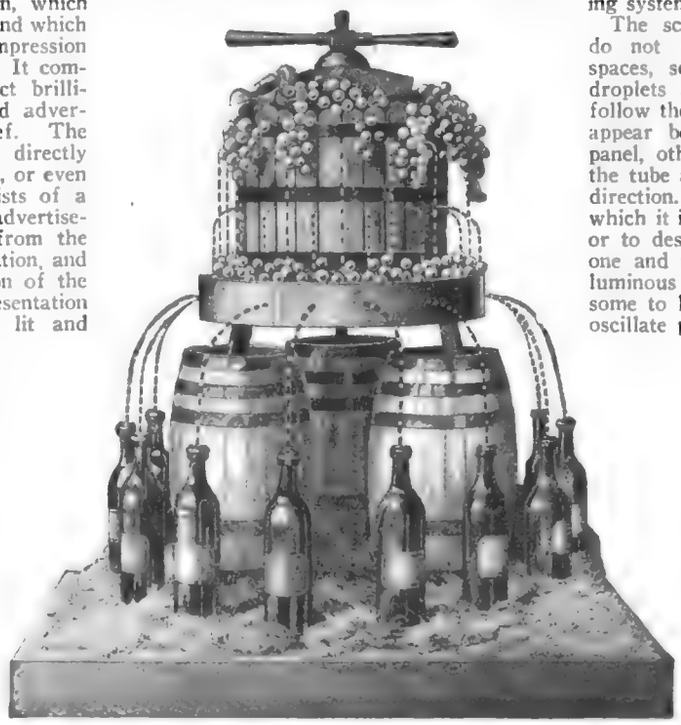

At the Left is Shown a Luminous Water Sign Used as an Advertisement of Medicated Iron. Cooled Water Pours From the Iron Press in Streams and Falls Into the Bottles, But the Latter Never Become Full.

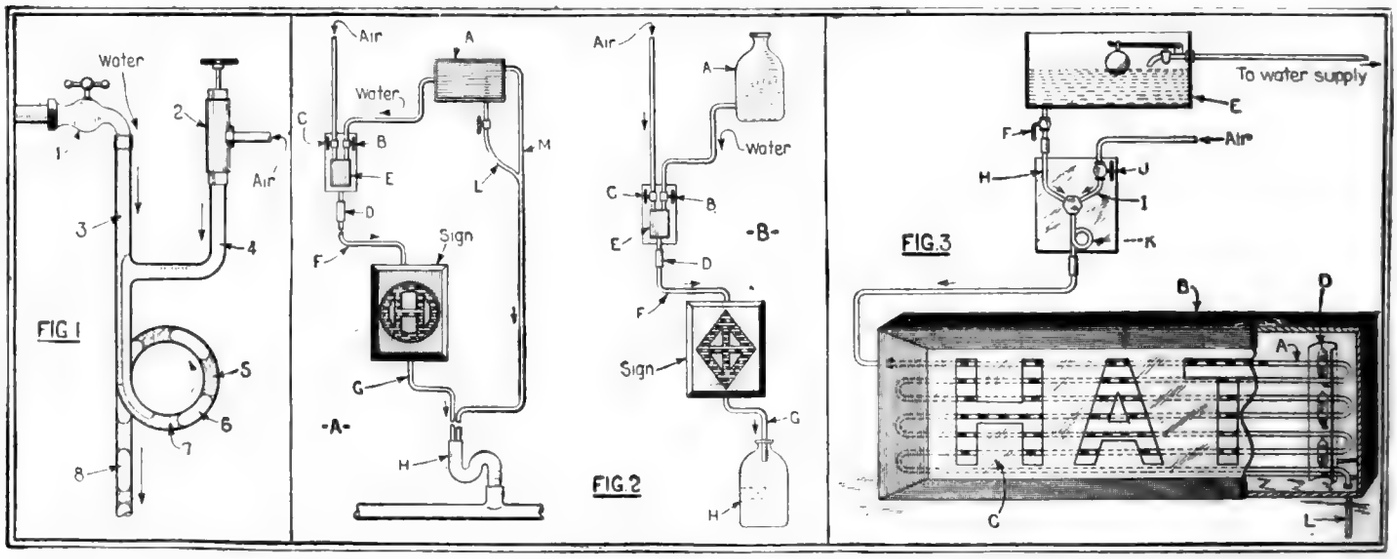

Fig. 1 Shows ... the Water and Air ... Formed. The ... ous.

Fig. 2A Shows How a Luminous Water Sign Operates, But the Water is Wasted. Fig. 2B Shows a Similar Sign Where bottles or Other Reservoirs Are Used to Conserve the Water.

Fig. 3 Shows a Complete Illuminated Transparency Which Utilizes Parallel Glass Tubes Through which the bubbles of Air and Water Circulate. These Are Visible Through Letters Cut in the Front of the Cabinet Containing the Tubes.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

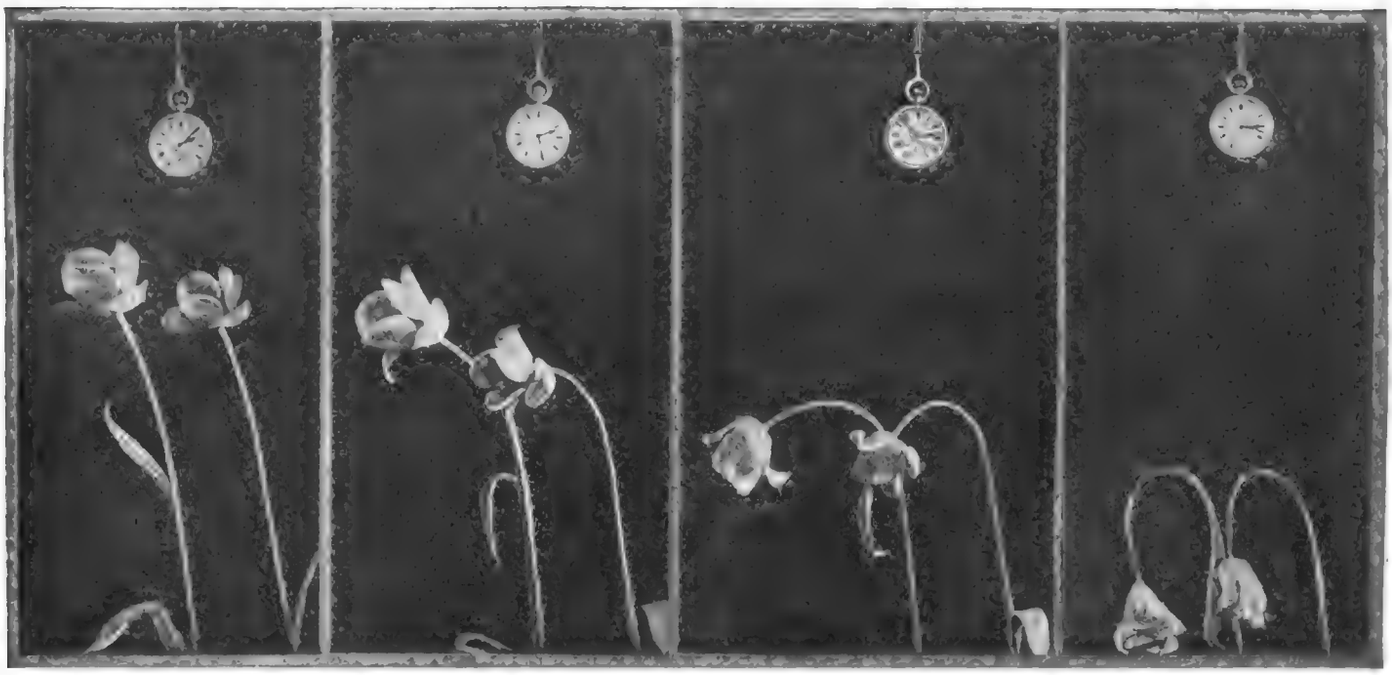

THE DEATH OF A FLOWER—The Tulips Were Mortally Injured at the Roots and the Time Which They Took to Die is Recorded by the Watch. Photos By S. Leonard Bastin.

Parachute for Mountain Climbers

Quite frequently do we read of mountain climbers losing their lives by falling from a high precipice or being caught in a storm. Then again it has been stated that it is more difficult to descend a mountain than to climb it. All of this danger and difficulty can be eliminated if the alpinist will carry a seven-pound pack on his back containing one of the regulation U. S. Army parachutes. This parachute opens by merely pulling a cord, conveniently placed with a large ring on one end.

The new parachute is fully opened after a drop of sixty feet, and a man has actually jumped from the low altitude of seventy-five feet from a flying boat travelling at one hundred miles per hour. The breaking of a life line or a fall from a precipice need have no terrors now if one has a parachute. In case of a sudden storm or a perilous descent it will be safer and quicker to get down by means of the parachute.

Contributed by F. E. Loudy.

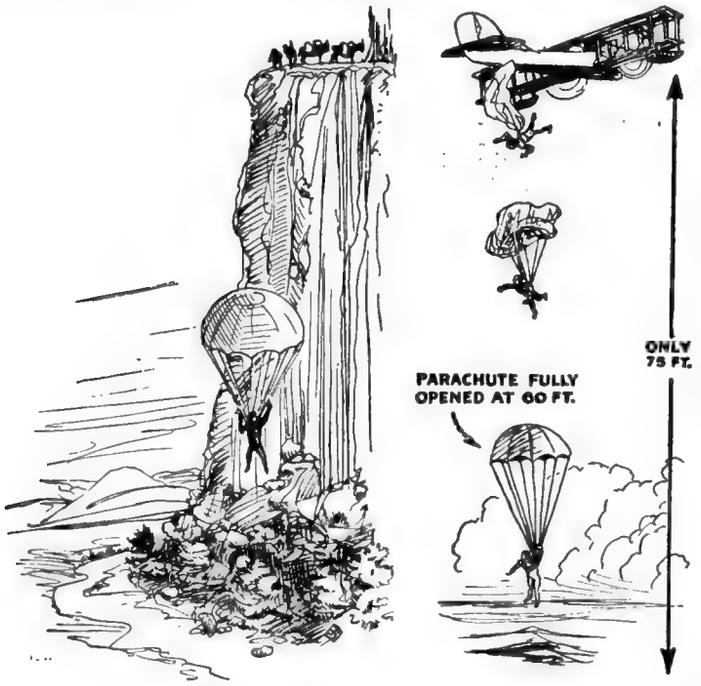

New Army Parachute Opens in 75-Foot Drop. Ideal Safety Device for Mountain Climbers.

Fire Under Water

At first appearance this suggests a very fantastic idea, but it is the result of thirty years of technical experience of a Berlin firm. This firm has put this apparatus called "The Diving Condor" upon the market. When a heater for a bathtub fails or cannot be used for any reason, this apparatus helps out in an emergency, as it represents a subaqueous bath-oven for heating the water. Burning under the surface of the water, it prepares our bath and helps along with the house washing, replaces the fixed kitchen boiler installation, the big wash boiler, or the portable bath ovens, which are perpetually breaking down and needing repairs, etc. It is practical for use for any emergency requiring big tubs. The apparatus requires no expensive installation, is not expensive in the power it consumes and its installation is ten times cheaper than that of an ordinary gas stove.

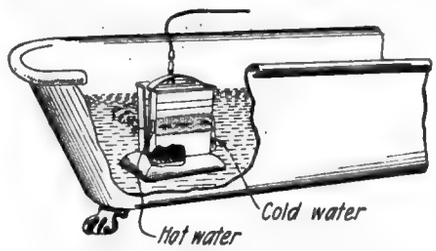

Novel Heater for Bath Tub Water.

Fish Line Indicates 'Plane's Height

Mr. C. Francis Jenkins, the well-known motion picture machine inventor of Washington, whose system of movies by radio was described some months ago in Science and Invention, follows seaplaning as a hobby. He often goes seaplaning at night and he has invented a simple scheme of determining when he is but a short distance above the water, preparatory to making a landing in the dark. This scheme works in foggy or on clear nights equally well. He throws a twenty foot fish line over the side, at the lower end of which is a small sinker or weight, and then heads the seaplane slowly downward. As soon as he feels a tug on the line, he knows that it is touching the water and he then straightens out, preparatory to making a long slow descent toward the surface of the water.

Another novel and simple scheme for determining the height above land or water for aircraft, is that involving the use of two searchlights or small spotlights, the angles of one or both of them being variable by means of a calibrated dial control mechanism. Changes in altitude cause the light targets on the water to recede or approach.



When Fish Line Touches Water, Tug on Line Indicates Height of Plane Above Water.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

Luminous Water Signs

A FRENCH inventor has recently devised a kind of animated advertisement which is quite novel, and which in interest and originality seems to surpass all the processes and systems hitherto employed for attracting the curiosity of passers-by.

It is based on an optical illusion, which has not yet been fully investigated, and which gives in an attractive fashion the impression of water in continuous movement. It comprises a moving transparent object brilliantly illuminated and the animated advertisement apparently in high relief. The transparency which can be placed directly upon the glass of the show window, or even in the interior of the store, consists of a subject painted on glass, or of an advertisement glued thereon, illuminated from the rear by means of a special installation, and in front by the general illumination of the store. Some parts of the presentation judiciously selected, are specially lit and given an apparent movement, thanks to an exceedingly simple arrangement which will be described below. Finally the whole can be accompanied by illuminated captions, which also can be animated.

The animated advertisement produced in relief is composed of natural objects, whose apparent movements agree exactly with their presumable nature.

It is extremely difficult to describe the impression of motion which such objects give, and it is quite necessary to have seen at least once a picture of this kind in action to really take in the effect produced.

We propose, following the lines of the inventor of this arrangement, M. L. Masson, described in *Sience et la Vie,* to try to explain this phenomenon by describing its causes. The movement, or rather appearance of movement, is obtained without any mechanism. It consists in circulating within glass tubes at a constant speed, what may be called a string of beads formed of drops of water which may be colored or not, with bubbles of air between them of about the same dimensions.

In the illustrations are shown examples of such animated advertisements in relief. The moving parts are contained within glass tubes, but when the system is in action the tube becomes indistinguishable because it is transparent, while the moving beads, as we have termed them, are what the eye sees. The eye follows the movement of the liquid pearls, and is attracted by this interesting and graceful spectacle, while the observer is puzzled in his attempts to account for the effect produced. The illusion is so complete that it would seem as if the tube is in constant motion. One has to touch it with his hand to realize that it is stationary. In the other system of transparency a different phenomenon appears, but one just as curious.

The apparatus is composed of a glass screen on which is glued or painted the image, leaving transparent the design which is to be animated. It is placed before a grating built up by a series of horizontal tubes spaced at regular intervals and parallel to each other, through which the water circulates, the beads in each tube moving in the opposite direction to that followed by those in the adjoining ones. At the back of the screen or at the sides, the illuminating system is installed.

The screen being in position, the beads do not show except at the transparent spaces, so that the succession of moving droplets attracts the eye and forces it to follow the movement, until as the beads disappear behind the opaque portion of the panel, others catch the eye; some being in the tube above or below, go in the opposite direction. An optical effect is produced which it is quite impossible either to imagine or to describe. The eye, attracted first by one and then by another of the stream of luminous beads going some to right and some to left, sees a design which seems to oscillate perpetually before it. For according to the thickness and layout of the transparent portions, the design which they form seems to undulate, twist, turn, dance, sparkle, and even flame up in a way altogether curious and picturesque for which no comparison can be found.

The effect obtained is pretty and varied, and is in the highest degree amusing.

The process employed for producing the beads consists in having water or any colored liquid, fall drop by drop, governed by a cock, into a tube of glass, of which one

(*Continued on page* 496)

At the Left is Shown a Luminous Water Sign Used as an Advertisement of Medicated Iron. Cooled Water Pours From the Iron Press in Streams and Falls Into the Bottles, But the Latter Never Become Full.

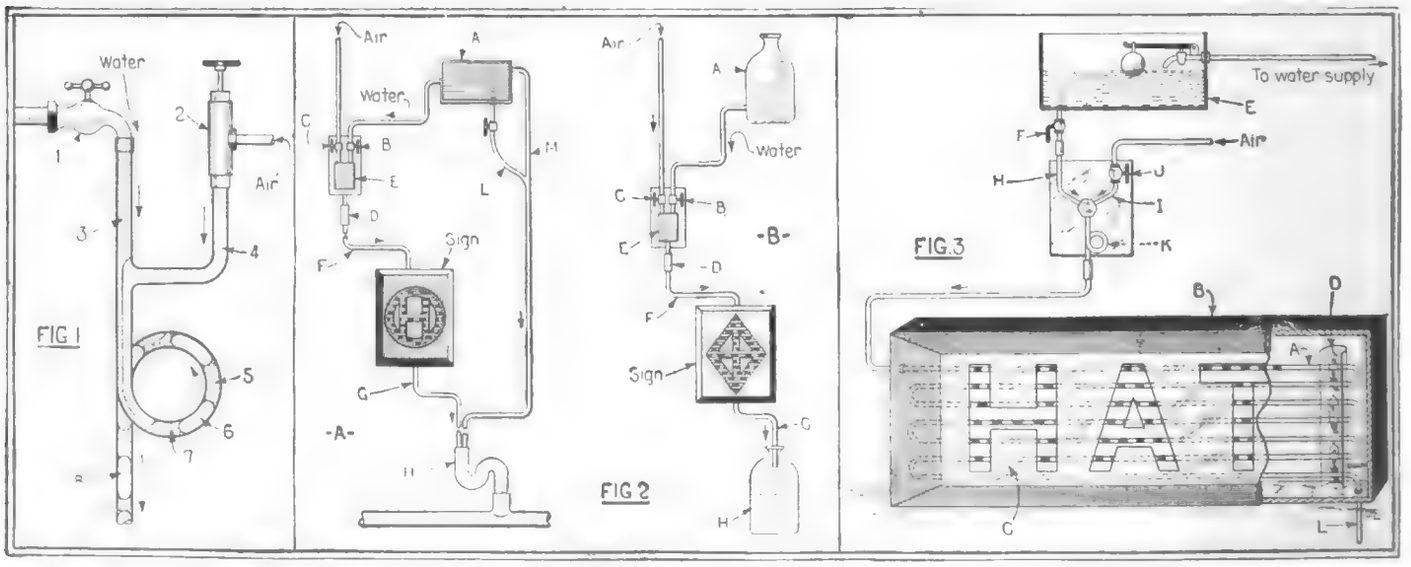

Fig. 1 Shows How the Water and Air Beads Are Formed. The Action is Obvious.

Fig. 2A Shows How a Luminous Water Sign Operates, But the Water is Wasted. Fig. 2B Shows a Similar Sign Where bottles or Other Reservoirs Are Used to Conserve the Water.

Fig. 3 Shows a Complete Illuminated Transparency Which Utilizes Parallel Glass Tubes Through which the bubbles of Air and Water Circulate. These Are Visible Through Letters Cut in the Front of the Cabinet Containing the Tubes.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

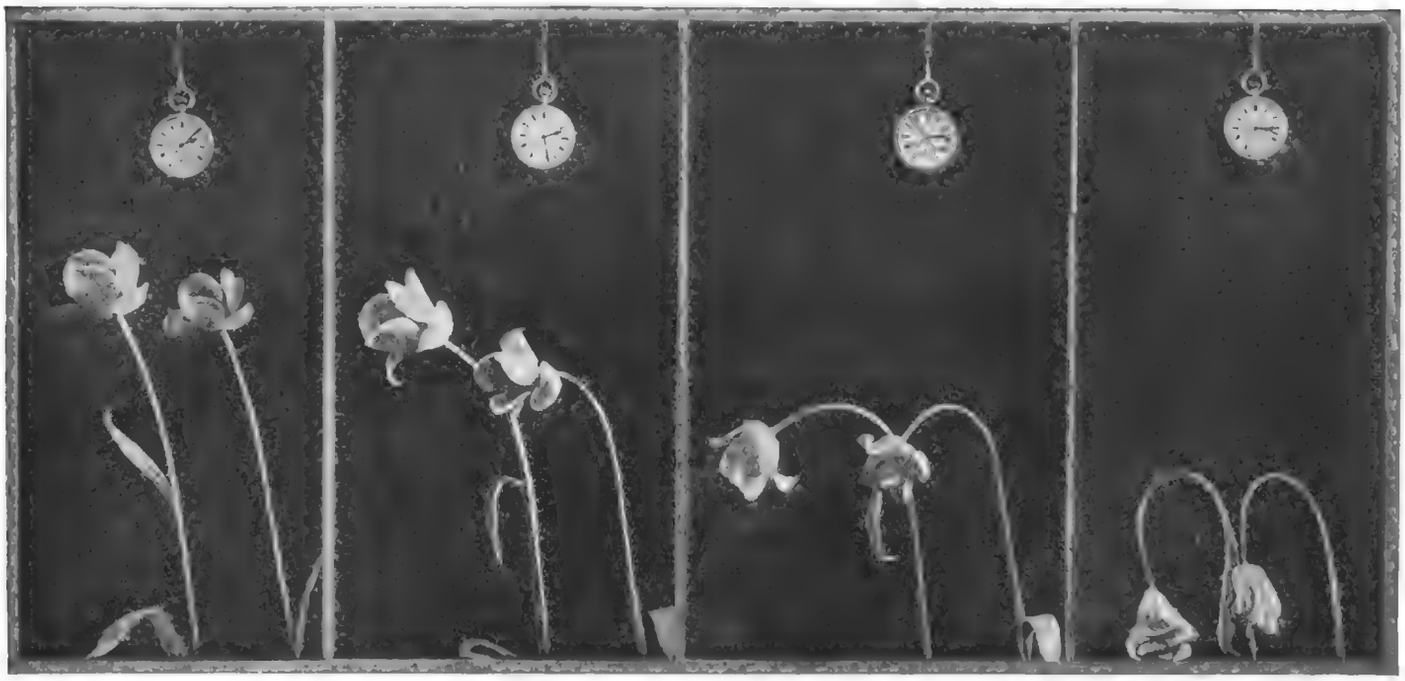

THE DEATH OF A FLOWER—The Tulips Were Mortally Injured at the Roots and the Time Which They Took to Die is Recorded by the Watch. Photos By S. Leonard Bastin.

Parachute for Mountain Climbers

Quite frequently do we read of mountain climbers losing their lives by falling from a high precipice or being caught in a storm. Then again it has been stated that it is more difficult to descend a mountain than to climb it. All of this danger and difficulty can be eliminated if the alpinist will carry a seven-pound pack on his back containing one of the regulation U. S. Army parachutes. This parachute opens by merely pulling a cord, conveniently placed with a large ring on one end.

The new parachute is fully opened after a drop of sixty feet, and a man has actually jumped from the low altitude of seventy-five feet from a flying boat travelling at one hundred miles per hour. The breaking of a life line or a fall from a precipice need have no terrors now if one has a parachute. In case of a sudden storm or a perilous descent it will be safer and quicker to get down by means of the parachute.

Contributed by F. E. Loudy.

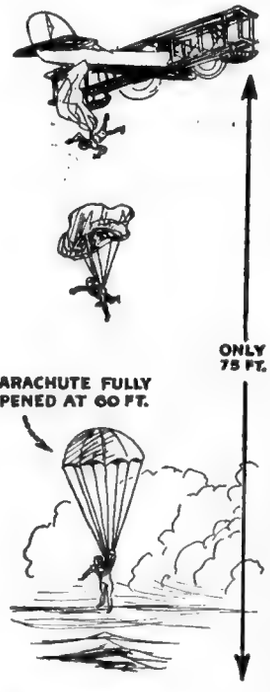

New Army Parachute Opens in 75-Foot Drop. Ideal Safety Device for Mountain Climbers.

Fire Under Water

At first appearance this suggests a very fantastic idea, but it is the result of thirty years of technical experience of a Berlin firm. This firm has put this apparatus called "The Diving Condor" upon the market. When a heater for a bathtub fails or cannot be used for any reason, this apparatus helps out in an emergency, as it represents a subaqueous bath-oven for heating the water. Burning under the surface of the water, it prepares our bath and helps along with the house washing, replaces the fixed kitchen boiler installation, the big wash boiler, or the portable bath ovens, which are perpetually breaking down and needing repairs, etc. It is practical for use for any emergency requiring big tubs. The apparatus requires no expensive installation, is not expensive in the power it consumes and its installation is ten times cheaper than that of an ordinary gas stove.

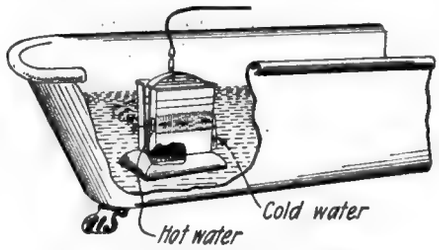

Novel Heater for Bath Tub Water.

Fish Line Indicates 'Plane's Height

Mr. C. Francis Jenkins, the well-known motion picture machine inventor of Washington, whose system of movies by radio was described some months ago in Science and Invention, follows seaplaning as a hobby. He often goes seaplaning at night and he has invented a simple scheme of determining when he is but a short distance above the water, preparatory to making a landing in the dark. This scheme works in foggy or on clear nights equally well. He throws a twenty foot fish line over the side, at the lower end of which is a small sinker or weight, and then heads the seaplane slowly downward. As soon as he feels a tug on the line, he knows that it is touching the water and he then straightens out, preparatory to making a long slow descent toward the surface of the water.

Another novel and simple scheme for determining the height above land or water for aircraft, is that involving the use of two searchlights or small spotlights, the angles of one or both of them being variable by means of a calibrated dial control mechanism. Changes in altitude cause the light targets on the water to recede or approach.



When Fish Line Touches Water, Tug on Line Indicates Height of Plane Above Water.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

Motor Car Leaps, Loops and Skids

By HAROLD F. RICHARDS, Ph. D.

OF THE GRADUATE COLLEGE, PRINCETON, NEW JERSEY

IMPROVEMENTS in aircraft and far-ranging projectiles have done a good deal to disabuse us of the idea that any body which apparently defies the laws of gravity is doing something paradoxical and unnatural, and yet one has only to converse with a number of his fellow motor-enthusiasts to find that there is the greatest diversity of opinion regarding the actual nature of the forces which are brought into play when an automobile rounds a corner or circles a banked track, or when the driver turns the front wheels in correcting for a rear-wheel skid.

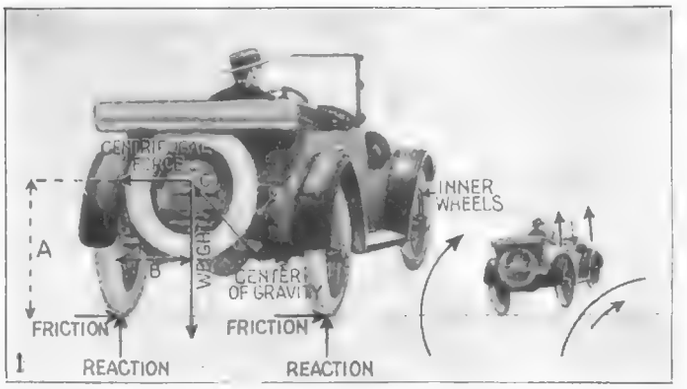

Fig. 1 Illustrates the Forces Which Tend To Lift the Inner Wheels When An Automobile Rounds a Curve at High Speed. This Diagram Shows the Forces Acting On the Machine If the Same Is Traveling On a Level Surface.

At this day and age it seems unnecessary to say that every one of the peculiar actions to which a speeding car is prone, is due to perfectly natural forces which are exactly as universal and inescapable as the force of gravity; and to the writer, at least, it has always proved more interesting to examine the natural causes of accidents and centrifugal effects than to try to become one of the walking "name-ometers" who can instantly give the make and serial number of a machine after one fleeting glance at the rear wheels disappearing around the corner.

Probably no delusion is so wide-spread as the one holding that the outer wheels are the ones which tend to rise when an auto rounds a curve. Even the promoters of racing bowls, who should have known better by observation, have sanctioned the posting of flaming lithographs showing a car racing around a curve with the outer wheels entirely off the ground. As a matter of fact, there is, barring collision, only one very rare case in which the outer wheels tend to rise from the road. The explanation of this effect, together with a number of other interesting phenomena, will appear at once after we have considered three very simple facts.

The first principle to be noted is that the tendency of a rigid body to rotate or turn depends not only on the forces acting, and on their direction, but on where they act as well. Everybody is familiar with the fact that a gate turns most easily if it be pushed at the point farthest from the hinge. Experiment has shown that the rotational effect of an applied force is proportional to the force multiplied by the distance between the point of application of the force and the axis about which rotation is produced. This product of force times lever arm is called the *torque* of the force, and the torque bears the same relation to the rotation of a body as the force would to a straight-line motion of that body as a whole. The importance of this principle in automobile problems will shortly be made evident.

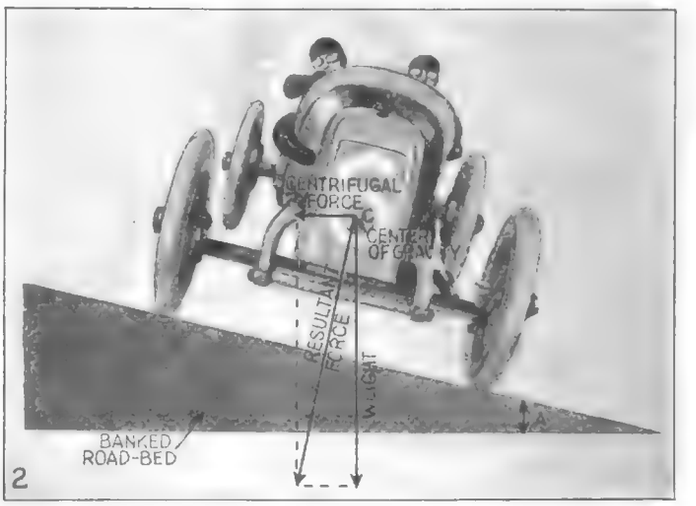

Fig. 2. If a Circular Speedway Is Banked At Such An Angle That the Resultant Centrifugal and Gravitational Forces Are Perpendicular to the Track, the Pressures On the Inner and Outer Wheels of the Car Are Equal, and the Car Does Not Skid.

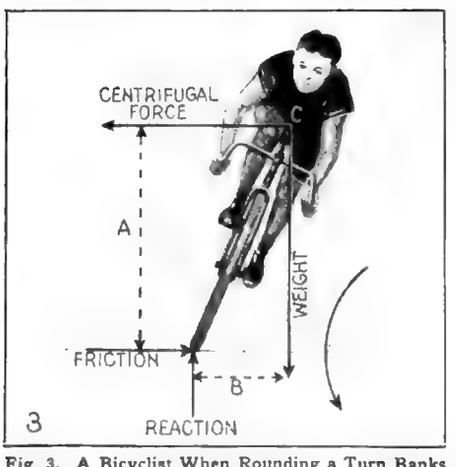

Fig. 3. A Bicyclist When Rounding a Turn Banks His Own Track By Leaning Inwards. If Weight Times Distance B Is Equal to Centrifugal Force Times Distance A, There Is No Tendency to Over-Turn.

The nature of the second principle to be applied will immediately become clear to anybody who will tie a bolt or nut to a string and whirl it around in the air. The string remains taut, showing that there is a force acting outwards along the string—that is, along the radius of the circle described by the rotating mass—and if the string in its whirling be allowed to pass through an intense flame, so as to be severed, the weight will be observed to fly off at a tangent to its circular path. The second fact shows that the body tended to continue in a straight-line motion, and the tautness of the string during the original whirling proved that this tendency of the body exhibited itself in the form of a force apparently pulling outwards from the center. *Centrifugal* is merely the Latin for *fleeing from the center*, and centrifugal force is the outward reaction of a body moving along a curved path. Forces are always twins; they never occur singly; this centrifugal force may be considered to be merely the reaction to the force which holds the body in a curved path. Which of the forces comes first is as fruitless a question as the old one involving the hen and the egg.

One fact further, and we are ready to consider our flying automobile. Tie a rope to any point of the rear axle and lift the car bodily into the air. Draw an imaginary line down through the suspended car, in such a direction that it will seem to be an extension of the rope, that is, in the same straight line Lower the car, and now fasten the rope to some other point of the car, preferably at the side, and lift the car again. Draw an imaginary line, as before, extending the direction of the rope through the car. Where these two lines cross, within the car lies the center of gravity of the car. This is an important point, for in all problems the weight of the car may be considered as acting as a single force placed at this center of gravity. This holds true even if the point should lie in empty space, say an inch or a foot above or below the floor of the car. If you do not believe it, run the car so that the front wheels are on one platform-scale, and the rear wheels on another; record the readings of the two scales, then replace the car by a light, stiff beam resting on two platforms, place a single heavy weight, equal to the weight of the car, at that point of the beam where the center of gravity of the car was previously located, and see whether after allowing for the weight of the beam, the indications of the two scales are not the same as before.

Now drive the car rapidly around a curve, on a level road. The forces acting are shown in Figure 1. The centrifugal force acts *outwards*, as drawn, and the torque due to this force—remember my previous paragraph—equals the centrifugal force multiplied by the distance A. This torque obviously tends to overturn the car outwards, and is resisted by an opposing torque which can be calculated by multiplying the weight of the car by the distance B. The outer wheels serve as fulcrum, or axis of rotation, being held in line by the friction at the road. If this friction is less than the centrifugal force, the car will skid outwards. Assuming a rough road, however, we can readily see that the inner wheels will or will not rise, according as the centri-

Digitized by Google

Original from UNIVERSITY OF CHICAGO

fugal torque is greater or less than the weight-torque. If the car does start to overturn outwards, B becomes smaller and A larger, hence, other factors being constant, the initial rise of the inner wheels increases the tendency to overturn. The lever arm of the force increases in length as the car turns over. This fact accounts for the suddenness of many accidents, such as turning turtle in a racing bowl.

The banking of race-tracks is designed to counteract the centrifugal torque. The centrifugal force and the weight may be combined into a single force (see Fig. 2), and the angle of the track should be so chosen that this resultant force will be perpendicular to the track. In this case, the forces on the inner and outer wheels are the same, and there is no tendency either to skid or to overturn. Since the centrifugal force depends on the speed, the angle can be exactly correct for a single speed only. Thus for a circular track, eight laps to the mile, the angle should be 66½ degrees for a speed of a mile a minute, and 84 degrees for 120 miles an hour (84 degrees is just 6 degrees short of the perpendicular). These values, of course, will vary slightly with the latitude and with the altitude above sea-level. In order to allow for varying speeds, the track is usually constructed with an upward curve rather than a straight inclination, so that the driver can mount higher on the track as his speed increases, and thus pick out the correct angle. No matter how great the speed, however, the car can never hold to a perpendicular wall, when running around it; for in this case both the momentum and the centrifugal force act at right angles to the weight, the one forward and the other outwards, and no force can ever be counterbalanced by one acting at right angles to itself.

The bicyclist secures the effect of banking by leaning inwards when rounding a corner, as shown in Fig. 3. The same reasoning regarding torques applies here, as above. The difference, of course, is that the ground reaction is not in line with the wheel, if the friction is too small, and consequently there is danger of skidding and falling. The common error of considering that an automobile inclines inward when rounding a curve is doubtless due to the drawing of an incorrect analogy from the inward lean of a cyclist. There is just one case in which a car can tend to overturn inwards, and this is where the car, already high up on the side of a banked track, starts to slide sidewise down the slope, owing to incorrect angle and insufficient friction. Then, the car, having acquired lateral momentum in sliding down the slope, a rough spot on the track may catch the inner wheels and cause the car to overturn inwards, due to this momentum.

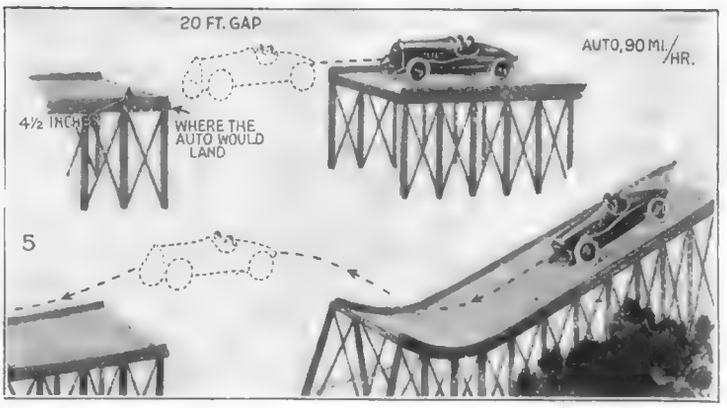

Fig. 5. In Leaping a Twenty Foot Gap, An Auto Traveling Ninety Miles An Hour, Drops 4½". The Upward Curve of a Starting Runway Counteracts the Gravitational Drop and Also Causes Auto To Land On Four Wheels.

The centrifugal force is also the important factor in looping the loop, as shown in Fig. 4. In position 1, the momentum of the car supports it against gravity, and the centrifugal force holds it to the track. In position 2, the momentum is at right angles to the force of gravity, but the centrifugal force supports the weight of the car; and in position 3 gravity is augmenting the momentum and, as before, the centrifugal force pulls the car against the track. The driver is at all times subjected to the same centrifugal force, and to the same momentum, as the car, and so he feels no tendency to fall from the car when it is inverted at the top. His pressure upon the seat, however, will vary. and if at the top the centrifugal force is just equal to the weight, he will exert no pressure whatever upon the seat. The fact that in this position the greater weight, that of the car, is above him, does not enter into the result; since in case of accident both driver and car would fall with exactly the same speed.

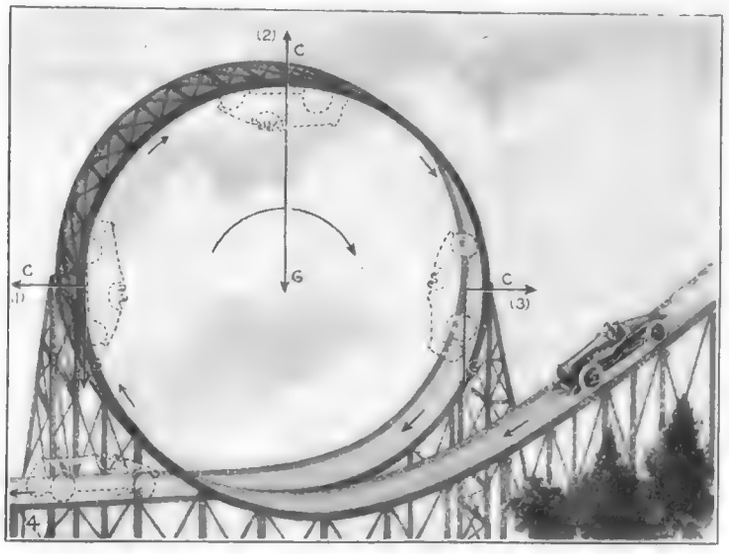

Fig. 4. Looping the Loop. C Represents Centrifugal Force, and G Gravitational Force. C Must Always Be Greater Than G at the Top of the Loop. The Driver Being Subjected to the Same Force As the Car, Feels No Tendency To Leave His Seat.

In leaping the gap, a favorite trick of Barnum and Bailey some ten years ago, the momentum, rather than the centrifugal force, is the important quantity. In considering the mechanics of this feat the reader must remember that a body projected horizontally in free space drops in one second exactly the same distance as a body falling from rest. Thus, for the speed and the gap shown in Fig. 5, the automobile could not possibly leap from one level plane onto the other. The momentum of the car would carry it across the gap, but during transit the car would fall 4½ inches, and even if the front wheels were able to climb upon the landing plane, owing to their curvature, they would in so doing throw the rear wheels still farther down, and the result would be tragic headlines in the newspapers. To allow for the gravitational drop, the projecting plane is curved upwards, and the same upward curve gives another advantage; namely, the rear wheels, which apply the power to the track, are the last to leave, and consequently the car is given a forward tilt which causes it to land flat-footed on the opposite platform.

To pass from rare feats to an every-day experience of motorists, why is it a good plan to turn the front wheels in the same direction in which the rear wheels are skidding? The fact remains that rear skids are often checked by turning the front wheels toward the skid. Figure 6 shows the forces involved. The skid is to the right, and consequently the car tends to twist in the direction shown by the first curved arrow; on turning the front wheels sharply to the right, however, the frictional force F is called into play, owing to the fact that the forward momentum of the car momentarily causes it to tend to continue moving forward, and this force F has one component, namely B, which is perpendicular to the wheel. This force B combines with the frictional forces opposing the rear skid to produce a torque in the opposite direction to the original turn of the car. If the front wheels also skid, the story is much sadder, as the motorist knows.

The results of a blow-out, to which so many fatal accidents are attributed, are,

(*Continued on page* 483)

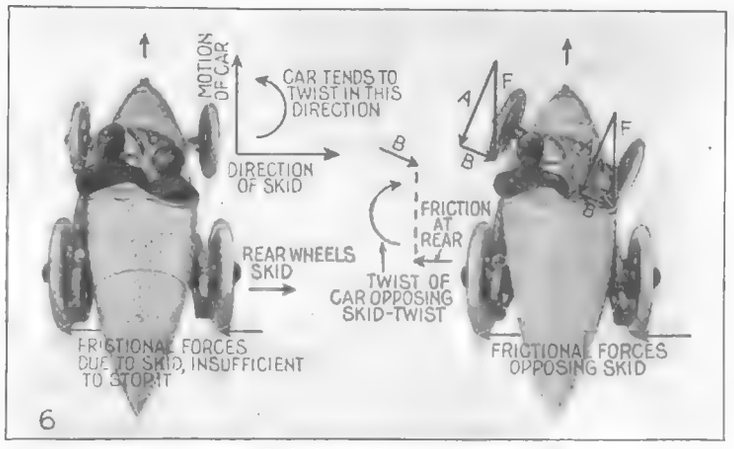

Fig. 6. By Turning Wheel Sharply In the Direction of the Skid, the Driver Calls Into Play the Frictional Forces F, Due to Forward Momentum of the Car. A and B Are Two Components of F. B Together With Frictional Forces at Rear of Car, Tends to Twist the Car in Direction Opposing the Skid.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

Scientific Problems and Puzzles

By ERNEST K. CHAPIN

No. 10 OF A SERIES

A STAGE magician once excited great astonishment by his feats of superhuman strength. In one of the most spectacular of his performances he would support a huge rock on his head and invite the strongest man in

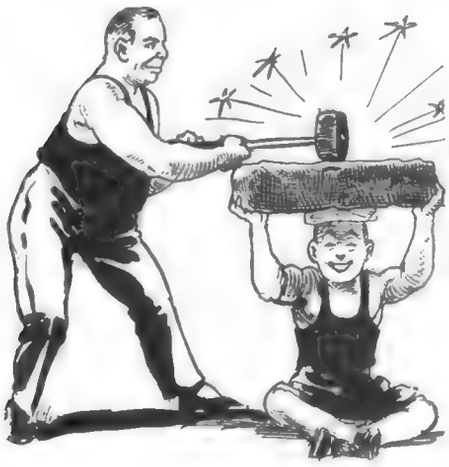

Would You Smile Under This Kind of Treatment? The Young Man Who Is Seated Seems to Be Enjoying It Immensely.

the audience to come up and crack it with a sledge hammer. If the efforts of the man were at first fruitless he would urge him to strike harder until at last the stone broke under the blows. Although the man went through this performance as many as seventeen times a day, there was nothing interposed between the stone and the man's head but a small blanket. Do you see how this feat can be possible without resort to trickery of some kind?

THE ENCHANTED RING

A trick which to the unsophisticated borders on the miraculous may be presented as follows: The magician invites someone up in front where he exhibits a figure dressed up to represent a small man wearing a silk hat. After some preliminary lingo about the shady history of the individual the representative from the audience is asked to place a ring or loop made from a few turns of heavy copper wire over the man's hat and observe a demonstration of the man's satanic powers. Much to his consternation he finds that the ring resists quite strongly his efforts in this direction as if acted on by an invisible or occult force. Furthermore, it gets quite hot in his hands as if the fires of Inferno had been invoked. Can you explain how these surprising results can be obtained by invoking only the known laws of science?

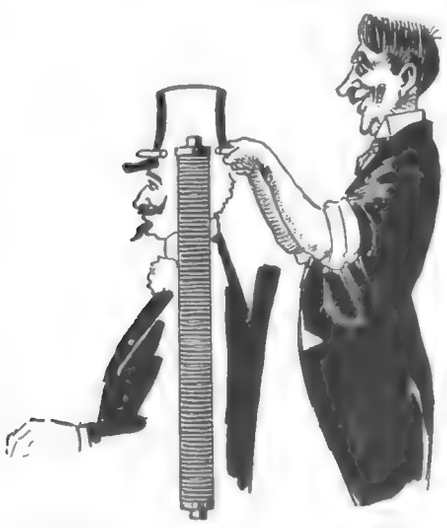

If You Were Unable to Place a Ring Over a Man's Hat and the Ring Got Hot in Your Hands, What Would You Think Was the Matter?

CALIBRATING A HYDROMETER

A boy is making his own battery hydrometer. He has blown a bulb on the end of a piece of glass tubing, loaded it with shot so that it will float vertically in water, and sealed off the top so that the shot cannot spill out. He now floats it in water and marks the level on the stem, lettering it "1" to indicate that at this point the hydrometer registers a density of 1 gram per cubic centimeter. But now comes a serious difficulty, for he doesn't know how to calibrate the

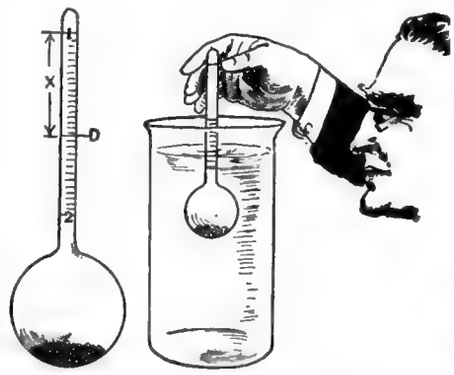

Knowing How Far a Hydrometer Sinks in Water, How Would You Calibrate It for Other Liquids?

rest of the stem without making up a lot of solutions of known density and floating the hydrometer in each one in succession. It would simplify matters immensely if someone would show him a way to figure out how far below the first mark he must place any other mark that is to indicate some particular density. The weight of the hydrometer is 20 grams and the cross sectional area of the stem is 0.25 sq. cm.

ANOTHER PULLEY SYSTEM

In the accompanying diagram of a pulley system how hard must the man pull to maintain himself in equilibrium if his weight is 160 lbs. and that of the plank on which he stands is 80 lbs.?

WAXING OR WANING?

Ask the average mortal how he can tell at a glance whether the moon is waxing or waning and he will look at you as if you

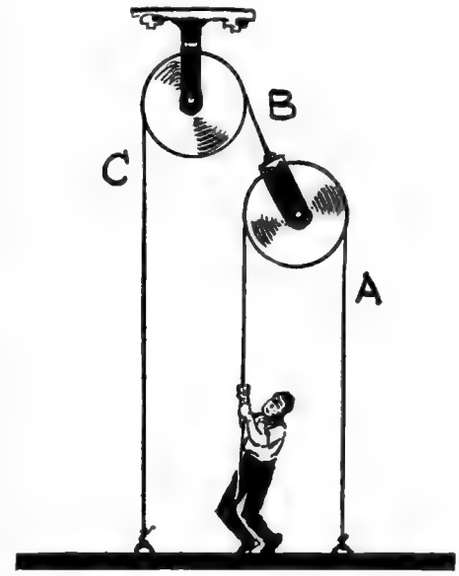

The Man in Our Illustration Seems to be Having a Hard Time Trying to Keep Himself from Falling. How Much Force Must He Exert in Order to Do So?

had asked him something about the Einstein theory or the fourth dimension. But ask old Granny Hilton, who believes that all human ups and downs follow the changes of the moon with unfailing regularity, and she will tell you as soon as she can get a peep at it. Can you figure out how she does it?

(*Continued on page* 503)

Can You Tell Whether the Moon at Which Our Young Couple is Gazing is Waxing or Waning?

Ozone Made To Order

Ozone, the intangible substance that makes the air fresh and pleasant after a thunderstorm, and that gives the sea-breeze its invigorating quality, is now being electrically produced to aid in solving problems of ventilation and air supply in schools and work places where people are crowded together. Two schools, each housing one thousand pupils, were used throughout the past Winter, and it was found that the school in which the air was impregnated with ozone had less illness among its pupils, that it had only one-third as many absences for illness, and that the absences were shorter.

Ozone, produced electrically by a generator installed in the air-duct of the building, is added to the air at the rate of one part of ozone to two million parts of air.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

Magic For Everybody

By PROFESSOR JOSEPH DUNNINGER

NO. 6 OF A SERIES

TOP EDGE OF FLAP COVERED SAME AS TABLE-TOP.
LOOSE-WORKING FLAP IN COVER OF CANDY BOX WHICH DROPS THRU BODY OF BOX FORMING TABLE-TOP.
CATCH HOLDING TRAY.
TRAY OF CANDIES
SIDE OF CANDY BOX.
TABLE TOP
SHOWING HOW SIDE-FLAPS DROP FORMING BOTTOM TO BOX.

Left—The Magician Opens a Box On the Table Which Is Brimful of Candy. Taking Out Several Pieces He Proceeds to Devour Them. Some Guests Remark On His Seeming Bad Manners In Not Offering the Candy to Others. They Are Told to Help Themselves, But When They Open the Box They Find It Completely Empty.

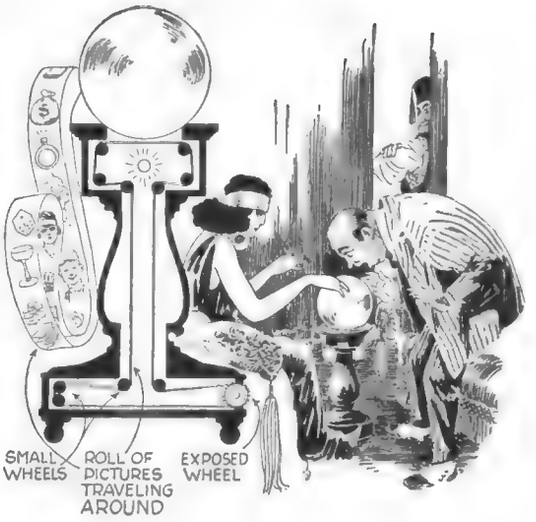

Right—Usually In the Art of Crystal Gazing Only the "Medium" Sees Visions, But With This New Type of Crystal All the Spectators May Distinctly See the Apparition. Pictures On An Endless Film Rotated By a Small Wheel Actuated By the Foot, Are Magnified By the Crystal Ball.

CRYSTAL GAZING

YEA, in the days of ancient Egypt, when enchantment and so-called witchcraft was in vogue, the ancient crystal was used by the wizards of old as a mystic mirror in which could be seen the reflection of the things to be. Much of Biblical importance and religious value has been attached in the centuries gone by, to the predictions which have been made by soothsayers after consulting the so-called mystic spheres of mysterious information. With the twentieth century and its many explanations of the many things at one time seemingly impossible, with achievements such as the radio, the submarine, the telephone, etc., has come a disbelief in the probabilities of forecasting through the focus of the mystic sphere, and yet there are many that claim that they can actually see things in the crystal.

Public wonder workers are to some extent using the crystal as an object of a most delightful form of entertainment, many of the society people whom I have entertained, have positive belief in the crystal as an information bureau. As per the title of my articles "Magic for Everybody," it is merely my intention to offer in this series tricks of a nature, such, as to prove of practical demonstrative value to my readers, and I will therefore not attempt to criticize the believers in the weird art of *crystal gazing*, nor will I attempt to deprive or destroy the religious value that some have attached thereto.

I offer herewith an original method of crystal gazing which will be found to be of unique value to those caring to put themselves to the trouble of constructing the paraphernalia necessary. It has its advantages over the average so-called form of crystal gazing, inasmuch as the operator or wizard wonder, as you care to term him, has absolute control over the sphere, and therefore can cause his friends to actually see things in the enchanted globe.

HOW THE CRYSTAL GLOBE IS BUILT

Referring to my diagram one will find that the stand upon which the crystal rests is the responsible item for bringing about the necessary results. Passing over a series of small wheels will be found a roll of spirit pictures. These pictures, which are rather small, should be painted upon a roll of black canvas cloth with phosphorous paint, the purpose of which will be readily explained. A small wheel with pointed edge is exposed, in the base of the stand, and also is a member of the series upon which the roll of pictures travel. It will not be necessary to explain that by turning the wheel, the pictures which are traveling upon an endless loop will be brought to view beneath the upper opening of the stand one at a time. The crystal ball being of solid glass (it may be an inverted fish aquarium) has magnifying qualities, and the subject looking into the crystal will therefore see the picture beneath, magnified many times, and as the basis of the cloth upon which the pictures are painted is a dull or dead black, the picture will to all appearances present itself apparently within the center of the sphere.

MAGIC CANDY

Smilingly the magician walks over to a table upon which is resting a candy box, and apparently carelessly opens the cover thereof and eats one, again closing the cover without offering any to his friends.

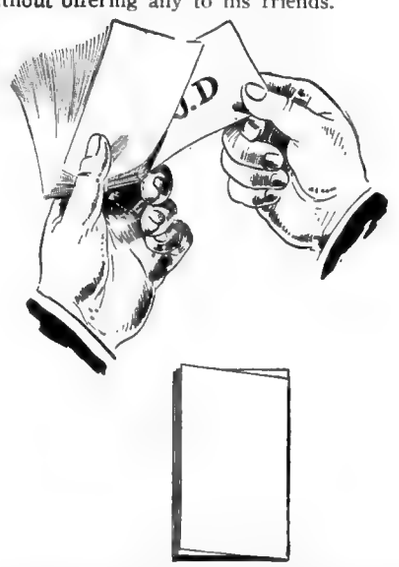

It Is Not Generally Known That Cigarette Papers Are Cut On the Bias, and That If One Of Them Is Initialed and Placed Into the Pack, the Performer Can Find it With Ease, Even Though Blindfolded and Holding the Package of Papers in Back of Him.

One of the spectators is sure to comment thereupon, and the magician with surprising apology for his seeming neglect at once makes his way to the table and offers the box and its entire contents to his friends to partake of the candy. Much to their surprise, however, when the cover is lifted, the box which a moment ago was brimful with the choicest of sugared goodies, is now entirely empty. The candies really consist of but one layer, which are contained in a tray, held to the upper edge of the box by a set of catches, which will not release until the cover of the box is shut down tightly. In this cover will be found a loose working flap the top side of which has been covered with material similar to the table top covering. When the cover of the box is closed down tight the catches holding this tray are released and the tray of candies travels down through the box, which is bottomless, and rests itself in a trap made to receive it in the table top. The flap also travels through the box and covers the candy and tray, so that when the box is removed from the table no traces of the sweets can be found. A set of flaps working on small spring hinges are held in place to the sides of the box, as shown in the drawings, and then when released at the proper time, fall into place, forming a false bottom.

THE CIGARETTE PAPER TRICK

The Effect: A package of cigarette paper of the average kind and quality is passed about for thorough inspection.

One of the cigarette papers is taken from a package and is secretly marked while the performer has left the room. It is then mixed in with the rest so that it's direct location is unknown. The performer places the papers beneath a table, or behind his back, so that his audience is convinced that he cannot possibly see them and immediately draws out the marked one. How is it done?

Inspection will prove that most cigarette papers are cut on the bias, that is to say, instead of the corners being square, they are cut at an angle. While one paper is being marked the performer leaves the room. When the marking has been done, he is recalled and brings with him the balance of the sheets. The performer secretly sees that when the marked paper, which is turned mark side down, so that he cannot see it, is returned to the stack, the package is so turned that when the paper is replaced two of its corners will protrude slightly. The magician has but to feel for the projecting corners and draw out the marked slip.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

THE CONSTRUCTOR



Selenium Star Photometer

By LEWIS J. BOSS

THIS little device, the latest aid which science has brought to the astronomer to assist him in delving into the depths of the universe, is in itself essentially simple. Briefly, it consists of a sensitive selenium cell connected in the same circuit with a very delicate galvanometer, a variable high resistance and a source of electric energy such as an ordinary battery.

The light-sensitive cell is affixed to the eyepiece of the telescope and takes the place of the observer's eye. It is in fact an electrical eye, which is many times more sensitive to variations in light than is the human eye. Selenium, a non-metallic element occupying the intermediate space between sulphur and tellurium, was discovered in 1817 by Berzelius while he was experimenting with the Fahlun pyrites in an endeavor to manufacture sulphuric acid from them. It enters into the manufacture of some kinds of ruby glass, and is obtained in several different forms, namely, amorphous, vitreous, colloidal and "metallic" selenium. The "metallic" form is produced from the vitreous variety generally and is the only modification of the element which is light-sensitive. This substance is found to possess the ability to conduct electricity with greater or less facility accordingly as greater or less amounts of light are allowed to shine on its surface.

Since this is so, it follows that if we allow rays from a variable source of light to fall on an instrument containing such a sensitive cell and connect it to suitable indicating and controlling apparatus we will be able to obtain a record of the variability of the light with which we have to do. This is exactly what has been done in producing the selenium photometer for variable star work. Prof. Joel Stebbins, of the University of Illinois, has used selenium cells in astronomical work and we also find that Minchin has used these cells in several ways.

Selenium crystals have an extraordinarily high sensitivity as compared with the ordinary variety of selenium cell. With this fact in view the cells constructed for use in the selenium photometer are so made as to have a crystalline structure. From laboratory research as well as from published data, it appears that a single crystal of selenium 1 mm.² in area is one hundred times as sensitive as the best non-crystalline cell. In connection with a reflecting telescope, carrying a 36-inch mirror, such a crystal receiver could detect the light from a candle at a distance of 350 miles.

The cell is formed by winding two small enameled copper wires closely together around a flat strip of mica. (Fig. 1) Terminals are brought out from one end of each winding. This gives, in effect, two disconnected coils of wire wound side by side upon the same core. The enamel is now scraped off the top of the coils so that there is left a number of turns of two conductors spaced closely together but not touching. This arrangement is then warmed and a thin coating of the vitreous variety of selenium is spread uniformly over the wires. The strip is then placed in an oven and the temperature gradually increased to 100° Centigrade, when the vitreous selenium will rapidly begin to pass into the metallic (so-called) state, the temperature rising to about 217° Centigrade. The modification of selenium thus obtained will change its electrical resistance inversely as the amount of light allowed to fall upon it. The peculiar granular crystalline structure, so essential to the most delicate and sensitive cells, is produced by subjecting the cell to a temperature of 210° Centigrade for a considerable period of time, finally permitting the cell to cool very slowly.

Selenium appears to have no specific color sensitivity. Recent experiments carried on have shown that the character of the wavelength sensitivity curve of selenium can be controlled by heat treatment. Annealing the cell at 200° C. produces a maximum sensitivity in the red end of the spectrum, while annealing at 150° C. shifts the maximum sensitivity to 0.55μ. The distance between these crystals is shown by X-ray analysis to be in the neighborhood of 3.7×10^{-10} centimeters and the thickness of this delicate crystalline layer which is affected by the light action is calculated to be less than 0.000015 inch. From these facts it can be readily seen that in a thin layer of selenium a much higher sensitivity can be obtained than in a thick one. For this reason the photometer cells have an extremely thin coating in order that the change in conductivity may be great in proportion to the variation in light intensity. This change occurs almost instantly, or at most the in-

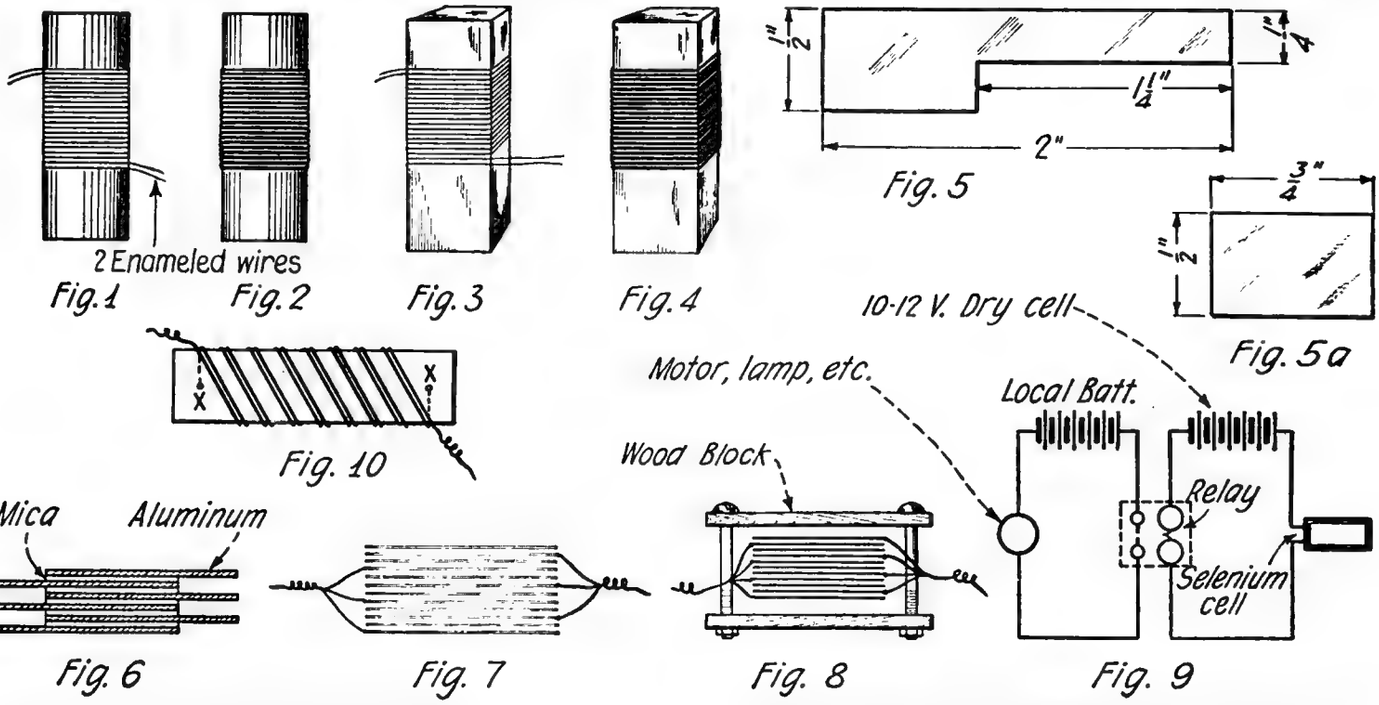

Fig. 1 Shows a Partially Wound Selenium Cell Core a... Completed. Figs. 3 and 4 Show Another Form of Cell... Core. Twenty Pieces of Thin Copper Sheet Cut A... Necessary For Making the Metal Plate Cell While ...ws It ...uare ...Are ...Mica As In Fig. 5A Must Also Be Made. The Metal and Mica Plates Are Stacked As Shown In Fig. 6 and Connected As In Fig. 7 and Should Be Clamped Between Two Wood Blocks As Shown In Fig. 8. The Circuit For Testing the Cells Is Shown in Fig. 9. A Mica Sheet Cell Is Shown In Fig. 10.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

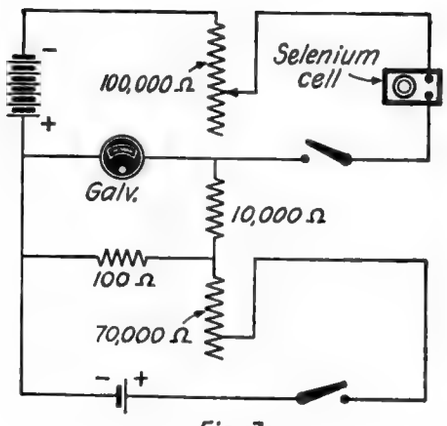

Fig. 3

Fig. 3 Above Shows Another Test Circuit For Determining the Resistance of a Selenium Cell. At Right: The Upper Left Hand Photograph Shows a Partially Completed Cell and Directly Below Is Shown the Completed Cell. At the Extreme Right Is a Photograph of the Galvano-Meter Used In the Tests.

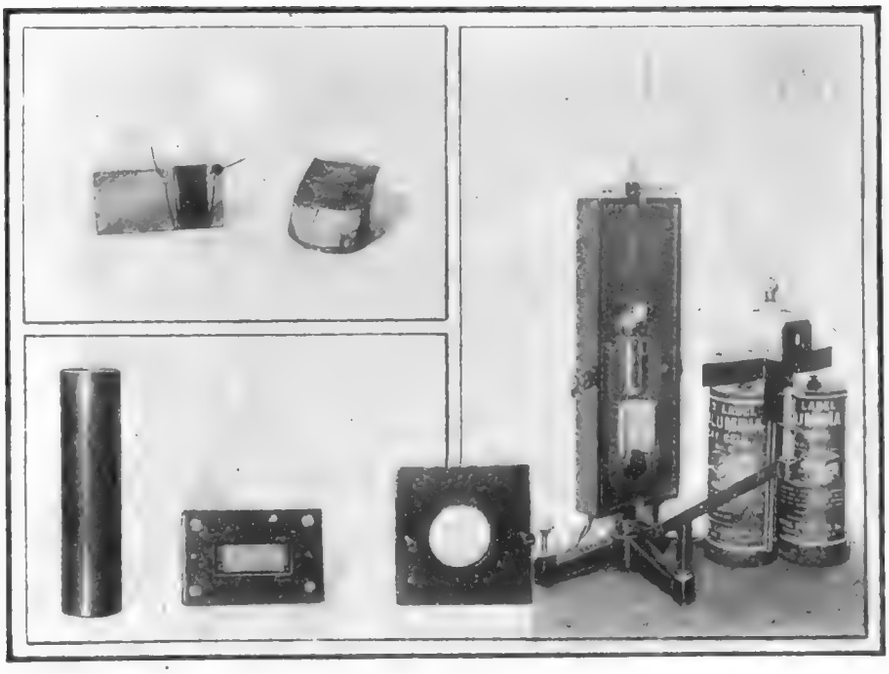

terval of time is less than 0.01 of a second.

The selenium cell, having passed through the several processes outlined above, is now ready to be used at the telescope. It is placed in a suitable bakelite mounting and is affixed to the telescope in place of the eyepiece, by means of a short brass tube, in reality taking the place of the observer's eye. The three different parts of the cell mounting are shown in the photograph.

Think of it! This small selenium plate detects and indicates changes in light which left its source perhaps hundreds of years ago, traveling at the rate of 186,000 miles per second for billions and billions of miles, and finally ending its journey by speeding down the telescope tube and imparting whatever knowledge it carries to the observer through the medium of the light sensitive selenium cell.

The circuit in which the cell is connected is shown diagrammatically in Fig. 3. Here the different variable resistances shown are for the purpose of balancing out certain undesirable features, such as zero shift, thermo-electric effects, etc., and also add to the sensitivity of the apparatus as a whole. In all cases the cells are slightly conducting when not exposed to light, so that the "dark current" causes an appreciable galvanometer deflection, which is annulled by passing an electric current in the opposite direction through the galvanometer. This counter-current is usually obtained by shunting across a resistance of 100 ohms, which is in series with a cell of 2 volts and a variable resistance of from zero to about 70,000 ohms. The source of light used in calibrating the cells is usually an 8 c. p. tungsten incandescent lamp, placed at a distance of 10 cm. from the cell under investigation.

Dr. Coblentz, of the Bureau of Standards, has published a curve showing the distribution of energy in the visible spectrum of the Nernst glower lamp as registered by means of a selenium cell and by a thermopile. Fig. 4, curve A, gives the spectral energy distribution obtained with a bismuth-silver thermopile (a non-selective radiometer), while curve B gives the response of a selenium cell when similarly exposed (for ten seconds) in different parts of the spectrum. Curve C gives the response that is obtained by exposing the selenium cell to equal amounts of energy in different parts of the spectrum using a high intensity, while curve D represents the response obtained at one-sixteenth the intensity used to obtain curve C. According to the measurements of Professor Pfund, for wave-lengths shorter than 0.65μ the deflections of the galvanometer are approximately proportional to the square root of the incident energy, while for wave-lengths greater than 0.7μ the deflections are approximately directly proportional to the intensity of the incident light.

It is relevant to add that, concerning the peculiar electrical properties of selenium, some hold the view that the increased conductivity of selenium is caused by (a resonance) freeing of electrons on exposure to light. Others consider it a modification of the crystal structure, assuming that selenium occurs in several allotropic forms of widely different electrical conductivity. The absence of polarization indicates that the conduction is not electrolytic. Experiments at liquid air temperatures, where the light sensitivity is retained, seems to be evidence supporting the electronic hypothesis. The selenium cell may be used as an indicator in the null and the equal deflection methods of obtaining ratio of intensities; for example, the galvanometer deflection might be observed when the cell is exposed, say, for five seconds, to the lower intensity. Then the higher intensity is reduced, by means of calibrated crossed Nicol prisms, a wire grating, an absorption wedge, a variable sector disk, or some other device to give the same deflection. In this manner the ratios of intensities of monochromatic light of the same wave-length may be observed; but the selenium cell cannot be used in this manner to compare accurately the intensities of light of two sources differing in color. This restriction applies, of course, to all of the photo-electric devices of a like nature, as, for instance, the potassium hydride or the rubidium cell. In applying the cell to variable star observations, therefore, due care has to be exercised in compensating for the color of the star observed as well as for the clearness of the earth's atmosphere. By examining the spectrum of the star beforehand, and bearing in mind the characteristics thus revealed, the cell may be applied to a much better advantage.

(*Continued on page* 497)

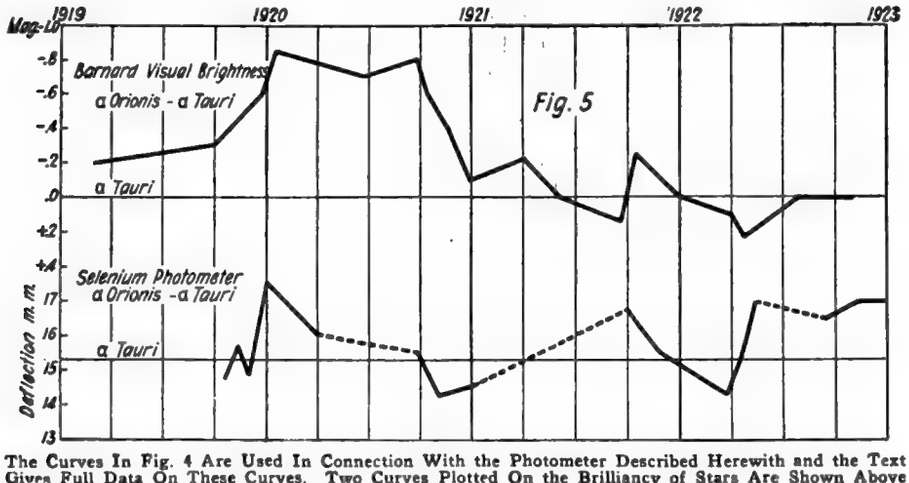

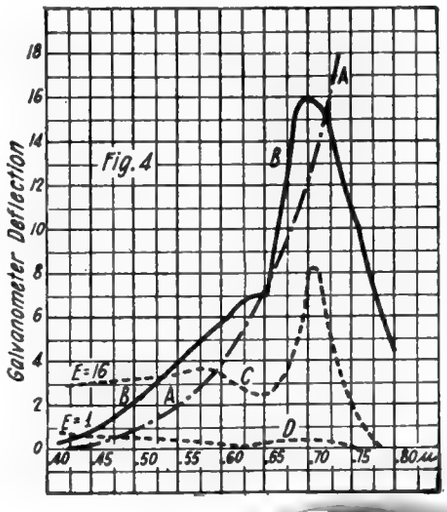

The Curves In Fig. 4 Are Used In Connection With the Photometer Described Herewith and the Text Gives Full Data On These Curves. Two Curves Plotted On the Brilliancy of Stars Are Shown Above in Fig. 5.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

Selenium Star Photometer

By LEWIS J. BOSS

THIS little device, the latest aid which science has brought to the astronomer to assist him in delving into the depths of the universe, is in itself essentially simple. Briefly, it consists of a sensitive selenium cell connected in the same circuit with a very delicate galvanometer, a variable high resistance and a source of electric energy such as an ordinary battery.

The light-sensitive cell is affixed to the eyepiece of the telescope and takes the place of the observer's eye. It is in fact an electrical eye, which is many times more sensitive to variations in light than is the human eye. Selenium, a non-metallic element occupying the intermediate space between sulphur and tellurium, was discovered in 1817 by Berzelius while he was experimenting with the Fahlun pyrites in an endeavor to manufacture sulphuric acid from them. It enters into the manufacture of some kinds of ruby glass, and is obtained in several different forms, namely, amorphous, vitreous, colloidal and "metallic" selenium. The "metallic" form is produced from the vitreous variety generally and is the only modification of the element which is light-sensitive. This substance is found to possess the ability to conduct electricity with greater or less facility accordingly as greater or less amounts of light are allowed to shine on its surface.

Since this is so, it follows that if we allow rays from a variable source of light to fall on an instrument containing such a sensitive cell and connect it to suitable indicating and controlling apparatus we will be able to obtain a record of the variability of the light with which we have to do. This is exactly what has been done in producing the selenium photometer for variable star work. Prof. Joel Stebbins, of the University of Illinois, has used selenium cells in astronomical work and we also find that Minchin has used these cells in several ways.

Selenium crystals have an extraordinarily high sensitivity as compared with the ordinary variety of selenium cell. With this fact in view the cells constructed for use in the selenium photometer are so made as to have a crystalline structure. From laboratory research as well as from published data, it appears that a single crystal of selenium 1 mm.^{2} in area is one hundred times as sensitive as the best non-crystalline cell. In connection with a reflecting telescope, carrying a 36-inch mirror, such a crystal receiver could detect the light from a candle at a distance of 350 miles.

The cell is formed by winding two small enameled copper wires closely together around a flat strip of mica. (Fig. 1) Terminals are brought out from one end of each winding. This gives, in effect, two disconnected coils of wire wound side by side upon the same core. The enamel is now scraped off the top of the coils so that there is left a number of turns of two conductors spaced closely together but not touching. This arrangement is then warmed and a thin coating of the vitreous variety of selenium is spread uniformly over the wires. The strip is then placed in an oven and the temperature gradually increased to 100° Centigrade, when the vitreous selenium will rapidly begin to pass into the metallic (so-called) state, the temperature rising to about 217° Centigrade. The modification of selenium thus obtained will change its electrical resistance inversely as the amount of light allowed to fall upon it. The peculiar granular crystalline structure, so essential to the most delicate and sensitive cells, is produced by subjecting the cell to a temperature of 210° Centigrade for a considerable period of time, finally permitting the cell to cool very slowly.

Selenium appears to have no specific color sensitivity. Recent experiments carried on have shown that the character of the wavelength sensitivity curve of selenium can be controlled by heat treatment. Annealing the cell at 200° C. produces a maximum sensitivity in the red end of the spectrum, while annealing at 150° C. shifts the maximum sensitivity to 0.55μ. The distance between these crystals is shown by X-ray analysis to be in the neighborhood of 3.7×10^{-10} centimeters and the thickness of this delicate crystalline layer which is affected by the light action is calculated to be less than 0.000015 inch. From these facts it can be readily seen that in a thin layer of selenium a much higher sensitivity can be obtained than in a thick one. For this reason the photometer cells have an extremely thin coating in order that the change in conductivity may be great in proportion to the variation in light intensity. This change occurs almost instantly, or at most the in-

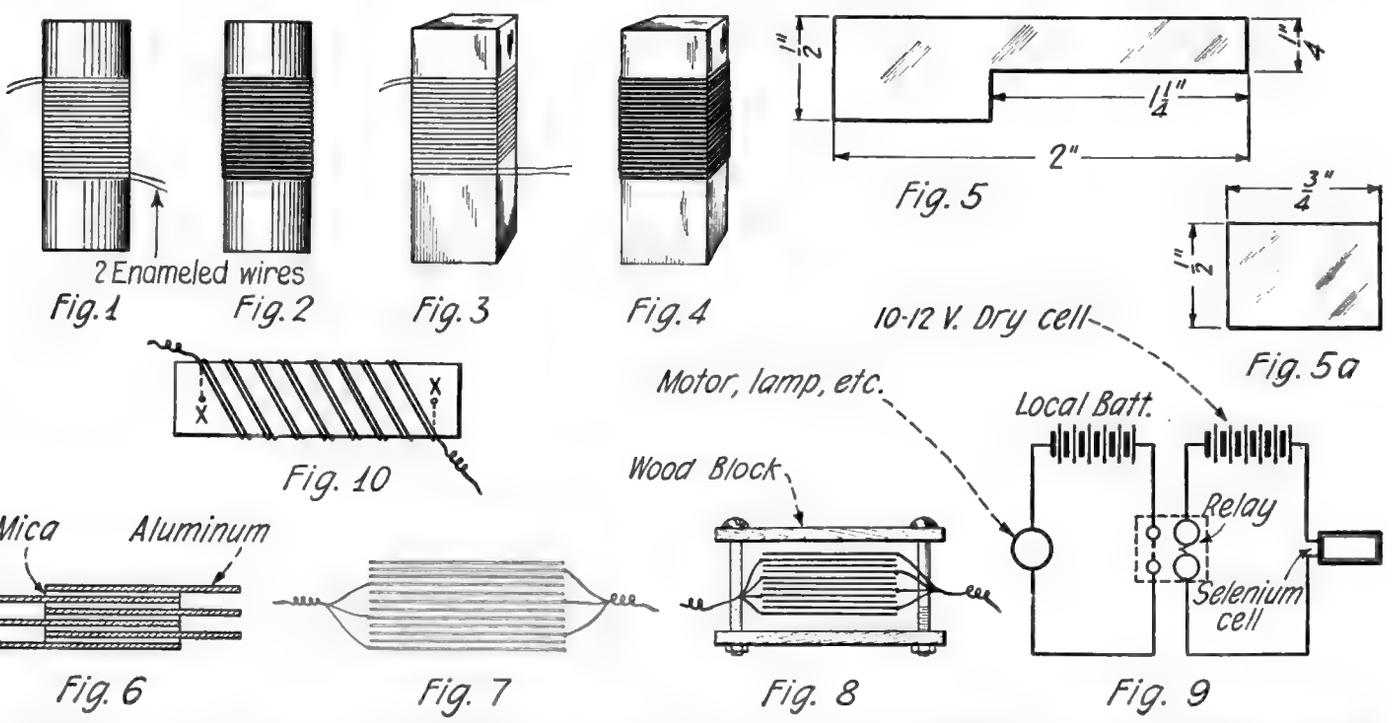

Fig. 1 Shows a Partially Wound Selenium Cell Core and Fig. 2 Shows It Completed. Figs. 3 and 4 Show Another Form of Cell Wound On a Square Core. Twenty Pieces of Thin Copper Sheet Cut As Shown In Fig. 5 Are Necessary For Making the Metal Plate Cell While Eighteen Pieces of Mica As In Fig. 5A Must Also Be Made. The Metal and Mica Plates Are Stacked As Shown In Fig. 6 and Connected As In Fig. 7 and Should Be Clamped Between Two Wood Blocks As Shown In Fig. 8. The Circuit For Testing the Cells Is Shown in Fig. 9. A Mica Sheet Cell Is Shown In Fig. 10.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

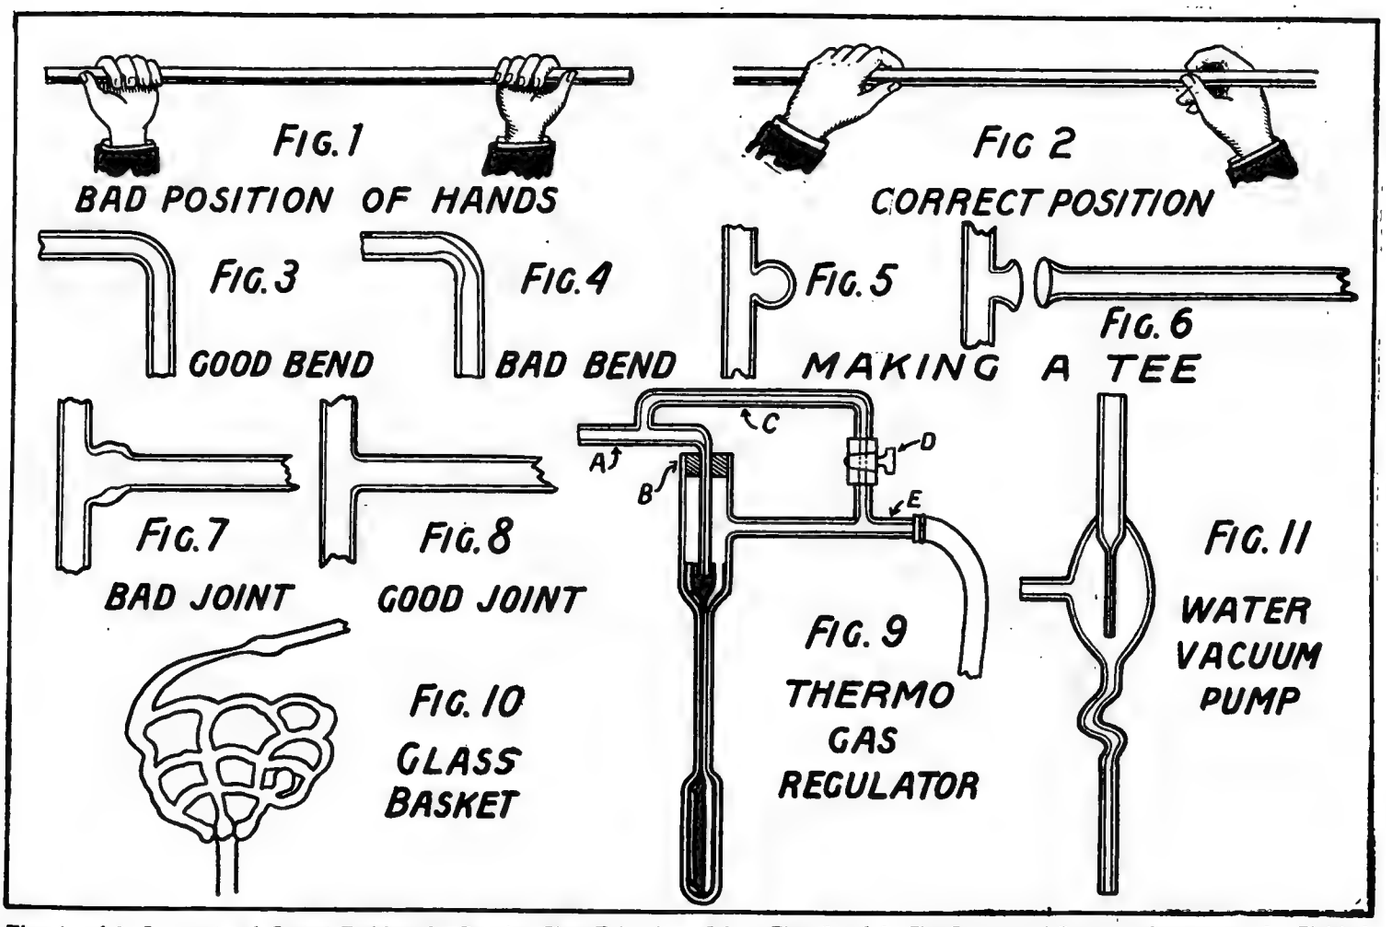

Figs. 1 and 2: Incorrect and Correct Positions for Rotating Glass Tubes in Flame. Figs. 3 and 4: How to Make a Good Right-Angle Bend, and the Result of Incorrect Manipulation. Figs. 5 and 6: Making a Right-Angle Joint. Figs. 7 and 8: The Correct and Incorrect Appearance of a Finished Joint. Figs. 9, 10 and 11: Examples of Glass Work Which Can Be Accomplished With a Little Patience and the Correct Manipulation of the Glass.

Glass Blowing In the Laboratory

By ISMAR GINSBERG, B. Sc., Chem Eng.

THE art of glass blowing is comparatively simple, provided one keeps in mind certain fundamental principles of the art.

Glass is a material which is thickly fluid under a high heat. But this heat is so great that it can best be obtained by the blast lamp and rather soon after the glass is removed from the flame of the lamp, it hardens and can no longer be worked properly. The greatest difficulty that the beginner finds in glass blowing is to shape the glass into the different forms he wishes it to assume, while the glass is in the proper pasty condition. If you attempt to blow a cold glass, uneven results are obtained. Furthermore, it is necessary in working with glass that the blowing be done easily and uniformly. It does not pay to lose one's patience and blow rapidly. If that is done, forms are obtained which are far from what are desired. A few tools are used in glass blowing, but generally the glass blower makes very little use of them. All he needs is a good blast burner and a triangular file for nicking the glass so as to break it off.

In blowing glass in the laboratory for the ordinary uses that arise from time to time therein, the chemist should know how to bend glass tubes so that the bore is not materially diminished in the bending operation, how to blow bulbs, and how to fuse glass at the end of the apparatus, at the side and internally. The rough edges can then be removed by a little grinding or by simply fusing the glass in the flame.

The principal piece of apparatus is the blast lamp. After the flame has been adjusted so that its height is not too great and the inner blue cone is fairly large but well distributed through the mass of the flame, the glass tube, that it is desired to bend at right-angles for example, is held in the flame just a little above the tip of the inner cone and allowed to heat up. It is kept in constant rotation while the heating is going on. In this stage of the operation the position of the hands is of the highest importance. In fact the success of glass blowing depends to a large extent on their correct position.

A GOOD QUALITY GLASS SHOULD BE EMPLOYED

The correct position of the hands is such that the left hand grasps the tube lightly with the palm in front. The tube is held between the thumb and the other fingers. The tube can thus be rotated continuously and regularly by a simple movement of the thumb and fingers. The other end of the tube is held between the thumb and the index finger in the right hand with the palm extending away from the glass blower.

In heating glass prior to blowing or formation into various shapes, it often happens that due to an irregularity in the glass, the flame or due to accidental moving of the hands, the heated part becomes slightly deformed; it gets out of shape. The beginner in this case generally tries to correct the fault by continuing heating the glass. But this just serves to complicate things, to accentuate the deformity and finally render the fault so bad that it can no longer be remedied. The only practical thing to do is to continue the heating and gradually draw out the glass to a fine point and then to insert the open end of the tube in the mouth and without twisting the tube to blow gently. The deformation is automatically corrected in this manner.

Another error which novices generally make is to suppose that the joint between two pieces of glass would be more solid, if the thickness of the glass were thicker. They therefore tend to accumulate a mass of glass at the point where the joint is to be made by prolonged heating. But in reality instead of being stronger, the joint is actually more fragile. For in cooling off the inequalities that arise due to the contraction that takes place in the glass mass result in the development of internal forces which act and counteract, and inevitably cause the glass to break. In making a good joint between two pieces of glass, as for example in joining a glass tube laterally to another tube or to a bulb, just a few simple rules must be followed to obtain success. The two parts, that are to be joined together, must be heated rapidly one after the other. The flame of the blast lamp must be large. Then the two pieces are brought together and the molten parts of the glass are allowed to make contact. Only one piece is supported, the other hangs from the first in an unsupported position. Then the pieces are pulled slightly as if it were desired to separate them. Air is blown through the tube while it is being uniformly turned while being heated in the flame. If these directions are followed out assiduously the joint is perfect and indeed in many cases it is impossible to tell where union took place.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

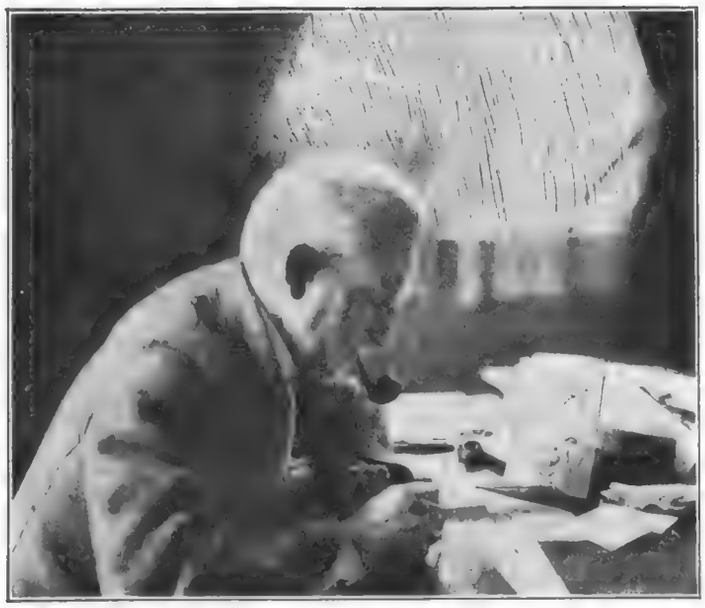

Etching Without Copper Plates

By HARRY DUNN

IF you are an etcher and have no copper plates, or if you want to be an etcher and yet dislike to go to the expense of trying out your experimental urge of art on copper plates, just do your etching without the copper. It is being done by several artists in San Francisco, where the method was discovered by Dr. George Lee Eaton, who uses worn out and resharpened surgical instruments as needles for his etching.

A photographic plate is the substitute employed. An undeveloped plate 5 by 7 inches in size, or larger, is procured, and the picture desired is etched on that plate, the shading of the lines and spaces being accomplished by varying the depth of the cut made by the needle in the emulsion on the plate. Undeveloped plates must be used because the emulsion hardens after development, and the cutting of the lines becomes difficult, sometimes impossible. By the varying depths of the lines, delicate degrees of shading can be made and as full advantage is taken of lights and shadows as in copperplate etching.

After the lines have been cut in the undeveloped plate, it is developed, just as in photography, except that a darkroom is unnecessary. After complete development, usually about 20 minutes, in any commercial developing solution, the plate is washed and passed into the fixing bath, as in the case of the photographic negative, and then washed and dried when it is ready for printing. The plate, having been fully exposed to the light while the etcher is working on it, becomes impervious to light in the spaces where no lines have been drawn and light passes through only in proportion to the depth of the lines etched on it.

Dr. Eaton devised the method of etching on these plates in making anatomical drawings and surgical diagrams, as well as for sketches of unusual operations or of conditions within the body revealed by operations. He found that the result gave him a permanent negative of such pictures as he wanted, often better than could be obtained by actual photography. Thereafter, he tried out the new method as a recreation, in sketches made on automobile trips through northern California. The results indicate that, in the hands of skilled artists, pictures comparable with the work of trained copper-etchers could be produced.

One of the advantages of the negative-etching is the low cost of photographic plates compared with that of copper, and the elimination of expensive tools and the fact that etchings, drawings, plans, sketches, maps or any other sort of work done by this method may be enlarged or reduced to any size desired by merely placing the developed negatives in an enlarging or reducing camera, and printing them out to the dimensions wanted. The method is not copyrighted, and Dr. Eaton has given it to the art associations of San Francisco, where several etchers have experimented with it with good results.

The Photograph Above Shows Dr. George Lee Eaton, Discoverer of the New Method of Etching. At the Right Is One of Dr. Eaton's Etchings Showing a Lake In Lake County, California, Which Was Printed On Ordinary Photographic Paper From the Glass Negative.

When the plate is thoroughly dry, it is placed against printing-out paper, in a printing frame, and printed by electric or sunlight, just as a photographic negative would be printed, except that the average exposure to the light is less than in the case of an ordinary negative. The result is a perfect print of the etching made on the emulsion. Some of the etchings so printed on brown and green printing-out papers have been remarkably beautiful, and, as the new art is still in its infancy, probably other improved coloring methods will be developed.

Uses For Cotter Pins

Many are the uses to which split keys or cotter pins can be put. As a matter of fact very few people realize just how important these little accessories are, primarily because of the fact that they have only attempted to use them in or around machinery. The cotter pins, however, may be employed as hooks for small doors or boxes, by merely clipping off a portion of the pin and bending the other to make it conform with the hook shown in Fig. 1. If instead of cutting off half of the pin we shorten one limb and bend the other portion around it, we have a miniature snap hook which may be employed in models, or may, in a pinch, even replace snap hooks on harness. A use for cotter pins that is very often overlooked, is illustrated in Fig. 3. The cotter pin is fastened to the wall with a screw; it will hold a spool of cotton when slipped over the legs. For repairing thin chains, the method employed in Fig. 4 will be found of value. It is very difficult to obtain eye bolts when needed, particularly the smaller sizes, but they may be made from cotter pins very easily, as shown in Fig. 5. By placing a nut and washer upon the eye bolt and then spreading the legs, a toggle bolt, Fig. 6, is produced. Figs. 7, 8 and 9, show methods of making connection clips. Fig. 8 is very serviceable in small receivers where the spread clip will hold itself in the binding post holes without necessitating tightening of the nuts. A method of repairing a buckle by merely slipping a cotter pin over the major portion is shown at 10, and 11 indicates a line guide for fishing rods or a single sight for .22 calibre rifles. If a number of these cotter pins, Fig. 12, are strung upon a wire, they make very serviceable card holders. The cards can be removed at any time without much difficulty, and may be replaced again without removing the cotter pins from the line. A clinched eye for locks on chests, thin doors, or for hooks, is shown in Fig. 13. By bending the cotter pin at right angles and driving it edgewise into a box, it makes a very fine hinge, a screw in the cover acting as the pivot point. This is shown in Fig. 14. Repairs for many kinds of springs can be made with the cotter pin if the legs are bent out, as illustrated in Fig. 15. The tension of the spring can be increased by merely turning the cotter pin into the spring for a greater distance. Another card holder, but one which is detachable, is shown in Fig. 16, and last but not least, we find the use depicted in Fig. 17 for preventing jug corks from being broken by too frequent extractions with a corkscrew or from being lost. A cord is passed through the cotter pin and tied to the neck of the jug. A tug at this cord will then remove the stopper, which being attached to the neck of the bottle by means of the cord, cannot be misplaced. Contributed by C. R. MULLIN.

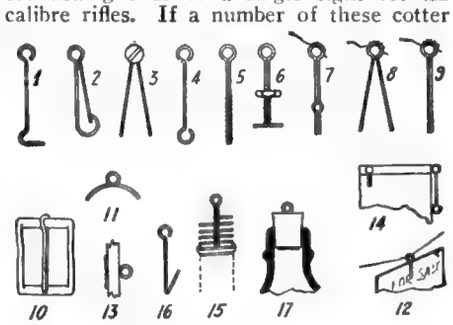

Many Uses For Cotter Pins Are Shown In the Above Illustrations and Many Others Will Probably Be Suggested To the Reader By His Ingenuity.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

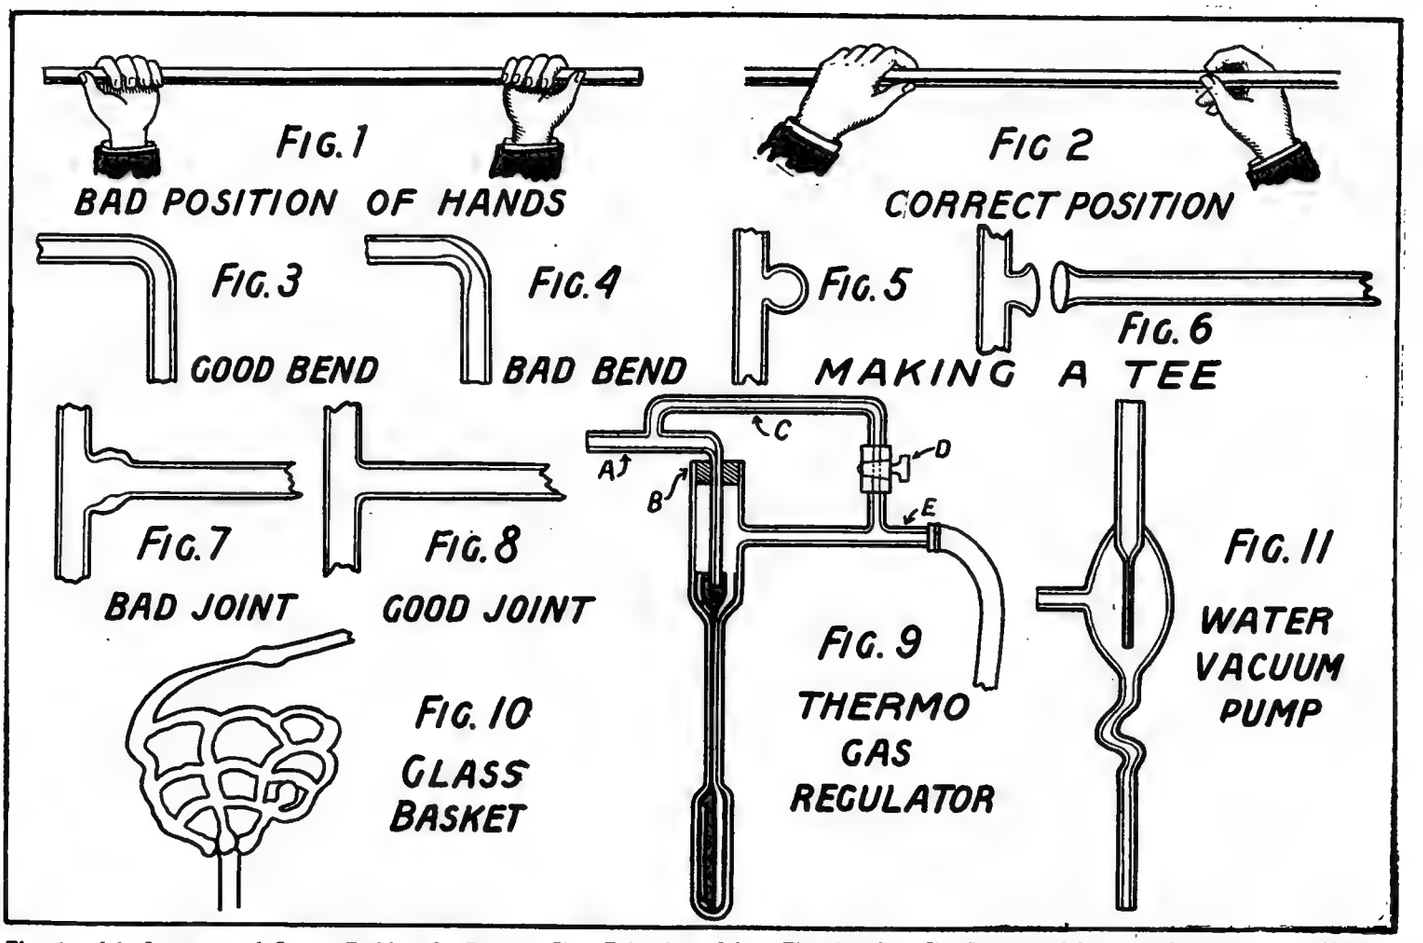

Figs. 1 and 2: Incorrect and Correct Positions for Rotating Glass Tubes in Flame. Figs. 3 and 4: How to Make a Good Right-Angle Bend, and the Result of Incorrect Manipulation. Figs. 5 and 6: Making a Right-Angle Joint. Figs. 7 and 8: The Correct and Incorrect Appearance of a Finished Joint. Figs. 9, 10 and 11: Examples of Glass Work Which Can Be Accomplished With a Little Patience and the Correct Manipulation of the Glass.

Glass Blowing In the Laboratory

By ISMAR GINSBERG, B. Sc., Chem Eng.

THE art of glass blowing is comparatively simple, provided one keeps in mind certain fundamental principles of the art.

Glass is a material which is thickly fluid under a high heat. But this heat is so great that it can best be obtained by the blast lamp and rather soon after the glass is removed from the flame of the lamp, it hardens and can no longer be worked properly. The greatest difficulty that the beginner finds in glass blowing is to shape the glass into the different forms he wishes it to assume, while the glass is in the proper pasty condition. If you attempt to blow a cold glass, uneven results are obtained. Furthermore, it is necessary in working with glass that the blowing be done easily and uniformly. It does not pay to lose one's patience and blow rapidly. If that is done, forms are obtained which are far from what are desired. A few tools are used in glass blowing, but generally the glass blower makes very little use of them. All he needs is a good blast burner and a triangular file for nicking the glass so as to break it off.

In blowing glass in the laboratory for the ordinary uses that arise from time to time therein, the chemist should know how to bend glass tubes so that the bore is not materially diminished in the bending operation, how to blow bulbs, and how to fuse glass at the end of the apparatus, at the side and internally. The rough edges can then be removed by a little grinding or by simply fusing the glass in the flame.

The principal piece of apparatus is the blast lamp. After the flame has been adjusted so that its height is not too great and the inner blue cone is fairly large but well distributed through the mass of the flame, the glass tube, that it is desired to bend at right-angles for example, is held in the flame just a little above the tip of the inner cone and allowed to heat up. It is kept in constant rotation while the heating is going on. In this stage of the operation the position of the hands is of the highest importance. In fact the success of glass blowing depends to a large extent on their correct position.

A GOOD QUALITY GLASS SHOULD BE EMPLOYED

The correct position of the hands is such that the left hand grasps the tube lightly with the palm in front. The tube is held between the thumb and the other fingers. The tube can thus be rotated continuously and regularly by a simple movement of the thumb and fingers. The other end of the tube is held between the thumb and the index finger in the right hand with the palm extending away from the glass blower.

In heating glass prior to blowing or formation into various shapes, it often happens that due to an irregularity in the glass, the flame or due to accidental moving of the hands, the heated part becomes slightly deformed; it gets out of shape. The beginner in this case generally tries to correct the fault by continuing heating the glass. But this just serves to complicate things, to accentuate the deformity and finally render the fault so bad that it can no longer be remedied. The only practical thing to do is to continue the heating and gradually draw out the glass to a fine point and then to insert the open end of the tube in the mouth and without twisting the tube to blow gently. The deformation is automatically corrected in this manner.

Another error which novices generally make is to suppose that the joint between two pieces of glass would be more solid, if the thickness of the glass were thicker. They therefore tend to accumulate a mass of glass at the point where the joint is to be made by prolonged heating. But in reality instead of being stronger, the joint is actually more fragile. For in cooling off the inequalities that arise due to the contraction that takes place in the glass mass result in the development of internal forces, which act and counteract, and inevitably cause the glass to break. In making a good joint between two pieces of glass, as for example in joining a glass tube laterally to another tube or to a bulb, just a few simple rules must be followed to obtain success. The two parts, that are to be joined together, must be heated rapidly one after the other. The flame of the blast lamp must be large. Then the two pieces are brought together and the molten parts of the glass are allowed to make contact. Only one piece is supported, the other hangs from the first in an unsupported position. Then the pieces are pulled slightly as if it were desired to separate them. Air is blown through the tube while it is being uniformly turned while being heated in the flame. If these directions are followed out assiduously the joint is perfect and indeed in many cases it is impossible to tell where union took place.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

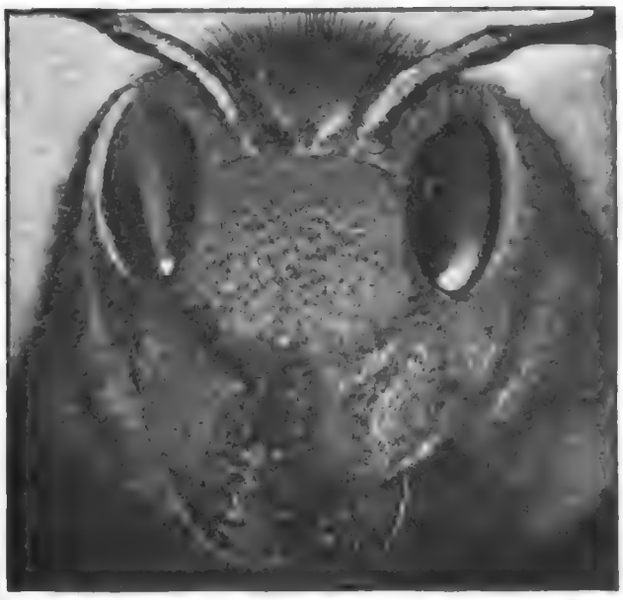

This Seeming Monstrosity Is Merely the Head of a Digger Wasp Enlarged Directly, By Means of the Camera Described Herewith.

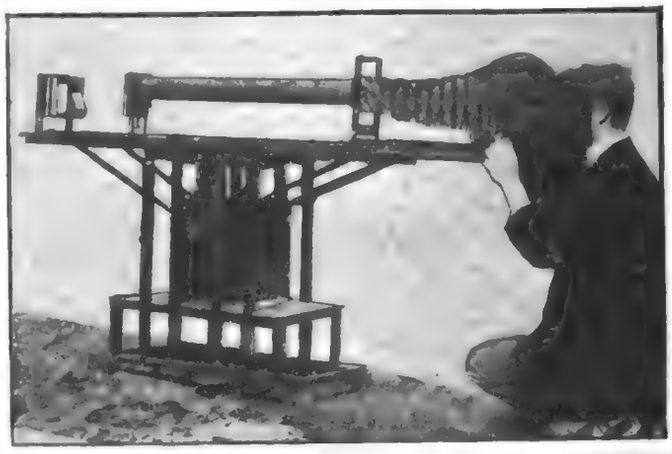

The Camera By Means of Which the Enlarged Photographs Illustrated Herewith Are Taken.

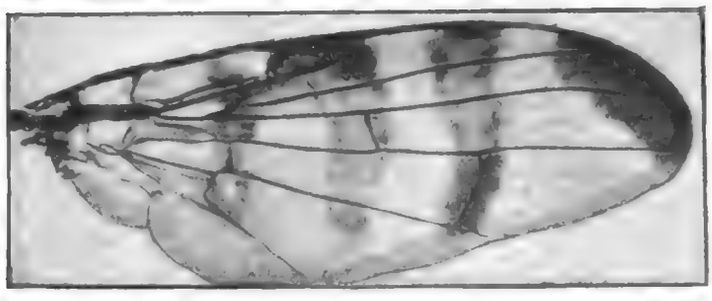

An Enlarged View of a Wing Taken From a Peacock Fly. Any Amateur Can Duplicate This Work With the Camera Illustrated in the Upper Right Hand Corner.

A Photograph of the Head of a Tiger Beetle Enlarged Ten Times

How to Use Your Camera

By DR. ERNEST BADE

NO. 8. VARIOUS WAYS OF ENLARGING PICTURES

THE cameras used by the amateur usually produce only small pictures. It is, of course, possible to enlarge these, but then the negative must be sharp and contrasty. Under no conditions will such an enlargement produce all the fine and delicate details found on the smaller negative. The greater its enlargement, the more will it lose in distinctness, and if the enlarging is pushed too far, then the silver grain of the emulsion will become too pronounced. An enlargement should not be made if it can be avoided, although certain types of artistic photos, which require a soft, half concealed effect, can be thus obtained. In other cases it is far better to take the picture in the desired size at once. If the bellows extension is not long enough, then an extension can be added, such as was mentioned in the first article. With an exceptionally good lens of wide aperture such hollow extensions, consisting of tubes or sections of square boxes which fit light-tight, can be made to a length of about 8 to 12 feet depending upon the focal length of the lens, or until an enlargement of approximately 12 diameters has been attained. This is also sufficient to take pictures of minute objects directly, such as insects, etc.

On the other hand, an exceptionally great enlargement can be obtained by photographing small objects directly if the lens of the camera is removed and an ordinary well ground hand or reading glass, a double or plano-convex lens being best adapted, is substituted. The most even illumination is obtained by having the source of light immediately behind the microscopic object. Electric light is best, and between light and object, a ground glass is placed which will illuminate the object more uniformly. The exposure is usually less than ¼ of a minute.



A, Light. B, Condensing Lens. C, Ground Glass. D, Opening in Cardboard Screen. E, Enlarging Extension. F, Camera Using Bromide Paper, In Place of Films.

Best results are obtained by using a lens larger than the object to be taken.

ENLARGING WITH A PHOTOGRAPHIC OBJECTIVE.

Enlarging with the photographic objective by the aid of one or more bellows extension sections will give quite a little depth, especially if the iris diaphragm is closed down. Such pictures are best taken out of doors in the direct light of the sun, the strong shadows being softened with the aid of a little mirror. With a long extension and with closed diaphragm an exposure of about a minute is necessary.

When light is transmitted through the negative so that an enlarged image is thrown upon the ground glass of the camera—using either the simple lens or the camera objective—the image can be taken directly upon bromide paper which, of course, will give a positive or print of the small negative used. Here the bromide paper is placed in the ordinary plate holder and exposed like a film or glass plate. The process of loading and developing must be carried out in red light. If it is desired to enlarge with reflected light, then a print of the negative must be taken and this must be enlarged upon film or glass plate.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

HOW-TO-MAKE-IT

This department will award the following monthly prizes: First prize, $15.00; second prize, $10.00; third prize, $5.00.
The purpose of this department is to stimulate experimenters toward accomplishing new things with old apparatus or old material, and for the most useful, practical and original idea submitted to the Editors of this department a monthly series of prizes will be awarded. For the best idea submitted a prize of $15.00 is awarded; for the second best idea a $10.00 prize, and for the third best a prize of $5.00. The article need not be very elaborate, and rough sketches are sufficient. We will make the mechanical drawings. Use only one side of sheet. Make sketches on separate sheets.

FIRST PRIZE $15.00

WATER COOLER FOR THE ICE BOX

During the summer months cold water is a vital necessity. No matter where you are, cold water is a refreshment which has no equal. At home, as many of you who have small refrigerators know, it is no simple

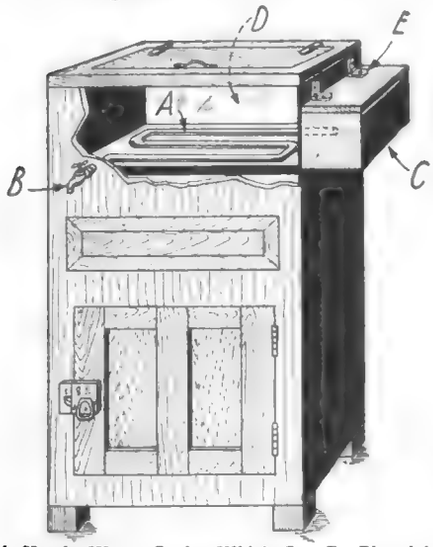

A Handy Water Cooler Which Can Be Placed in an Ordinary Ice Box and Which Will Supply Free Cold Water.

matter to have cold water, for the obvious reason that to keep water bottles continually cold is very inconvenient, while to place a box full of water into the refrigerator, is utterly impossible, due to the lack of space.

As I am the owner of a small refrigerator, I worked out the following scheme. After having a tinsmith make me a zinc box 14″ in length, 4″ wide, and 8″ high, with a cover, I took a lead pipe ⅜″ in diameter and about a yard long, and bent it into the shape shown in the drawing. After fastening the box to the side of the refrigerator by means of screws, as shown in the illustration, I attached the faucet B to the front end of the pipe. This done, I put the other end of the pipe through a hole in the box C. Then I secured a piece of galvanized tin, the size of the ice compartment, and covered the pipes to prevent them from being dented when the ice was put in. The operation of the above device is as follows. Water is poured into the reservoir box C, thus causing the pipe to be filled with water, which is cooled by the ice on top. Due to the fact that the pipe is long, a goodly amount of cold water is on hand at any time.

Contributed by JACOB SCHMIDT.

SECOND PRIZE $10.00

RESISTANCE FINDER

Most experimenters cannot afford to buy a good Wheatstone Bridge, and are therefore, greatly handicapped in performing many experiments. The resistance finder, here described, can be made very cheaply (for about $3.00 or $4.00), and can be employed to measure resistances quite accurately. It consists mainly of a calibrated rheostat or rotary potentiometer, having a resistance as high as you want to measure. A galvanometer with two coils of wire, wound on the same bobbin but in opposite directions is also necessary. Both coils must be of the same size of wire, and have exactly the same number of turns. The galvanometer with the location of the coils is shown in the illustration. The needle of the galvanometer is poised directly above the coils of wire. A small watch spring S, holds the pointer at the zero position on the scale indicated at Z. The instruments are mounted on a board of convenient size, with four binding posts, and connected as shown. To find the resistance of any instrument or length of wire which is likely to be within the range of the instrument, which in this case is 0-300 ohms, the unknown resistance is connected to binding posts C and D, while a dry battery is connected to A and B. The needle of the galvanometer will swing to the right or left, depending on which coil is carrying the most current. Since the current flowing in one coil is determined by the resistance across C, D, and in the other by the resistance at R, and as the resistance at C-D, is invariable, the two circuits can be brought to equality by varying the resistance at R. As soon as the circuits are adjusted correctly, the needle of the galvanometer will be at the zero position. This indicates that the resistance at R is equal to that at C-D; whatever resistance the pointer of the rheostat indicates, is also the unknown resistance.

Contributed by TRUEX BUCK.



Figure 1

Figure 2

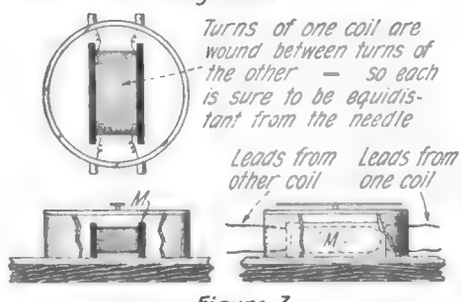
Turns of one coil are wound between turns of the other — so each is sure to be equidistant from the needle
Leads from other coil
Leads from one coil
M
M

Figure 3

An Instrument Designed for the Experimenter by Means of Which he Can Calibrate His Own Electrical Resistance.

THIRD PRIZE $5.00

SEALING COMPOUND HEATER

A very handy sealing compound heater can be easily built by the amateur. A discarded coffee percolator is first secured, and in the bottom of this a fitting for an iron pipe ⅜″ in diameter and about 5½″ long is fastened. This iron pipe is covered with mica or asbestos, and then wound with No. 26 iron

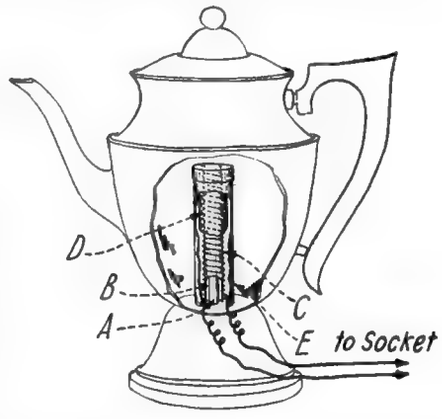

An Apparatus for Melting Sealing Compound, so That it Will Always Be Handy and Ready to Use.

wire. About ten feet of wire will be required. The turns should be spaced one-sixteenth of an inch apart. The coil or winding is then insulated on the outside with asbestos, whereupon the entire device is slipped into a ¾″ pipe and caps are screwed over either end, holes being drilled in the top end to permit passing the wire through the same. Leads are connected to the heating element and the percolator is filled with broken pieces of sealing compound, which may be heated up by simply turning on the current. The temperature will be maintained fairly constant.

Contributed by ANTON LUTONSKY.

COLD SOFT SOLDER

Ethyl acetate is first made by distilling a mixture of 20 parts of acetic acid, 10 parts sulphuric acid and 6 parts ethyl alcohol. Sealing wax is added to this distillate until no more will dissolve. Then, finely, powdered aluminum is added, a little at a time with constant stirring, until a stiff paste is formed. This compound thus made, is not exactly a solder, but a metallic cement which will withstand heat. It will mend holes in steam, water and gas pipes, also in aluminum agate and iron cooking utensils. It should be rubbed smoothly over the hole with a flat stick, while a piece of paper is held on the other side. It is very strong as a cement, and when it is used on cooking utensils, the finely powdered aluminum fuses together.

The solder should be kept in an airtight container and never brought near a flame.

Contributed by ALDEN JOHNSON.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

Utilizing Wired Radio for Broadcasting

By BERT T. BONAVENTURE

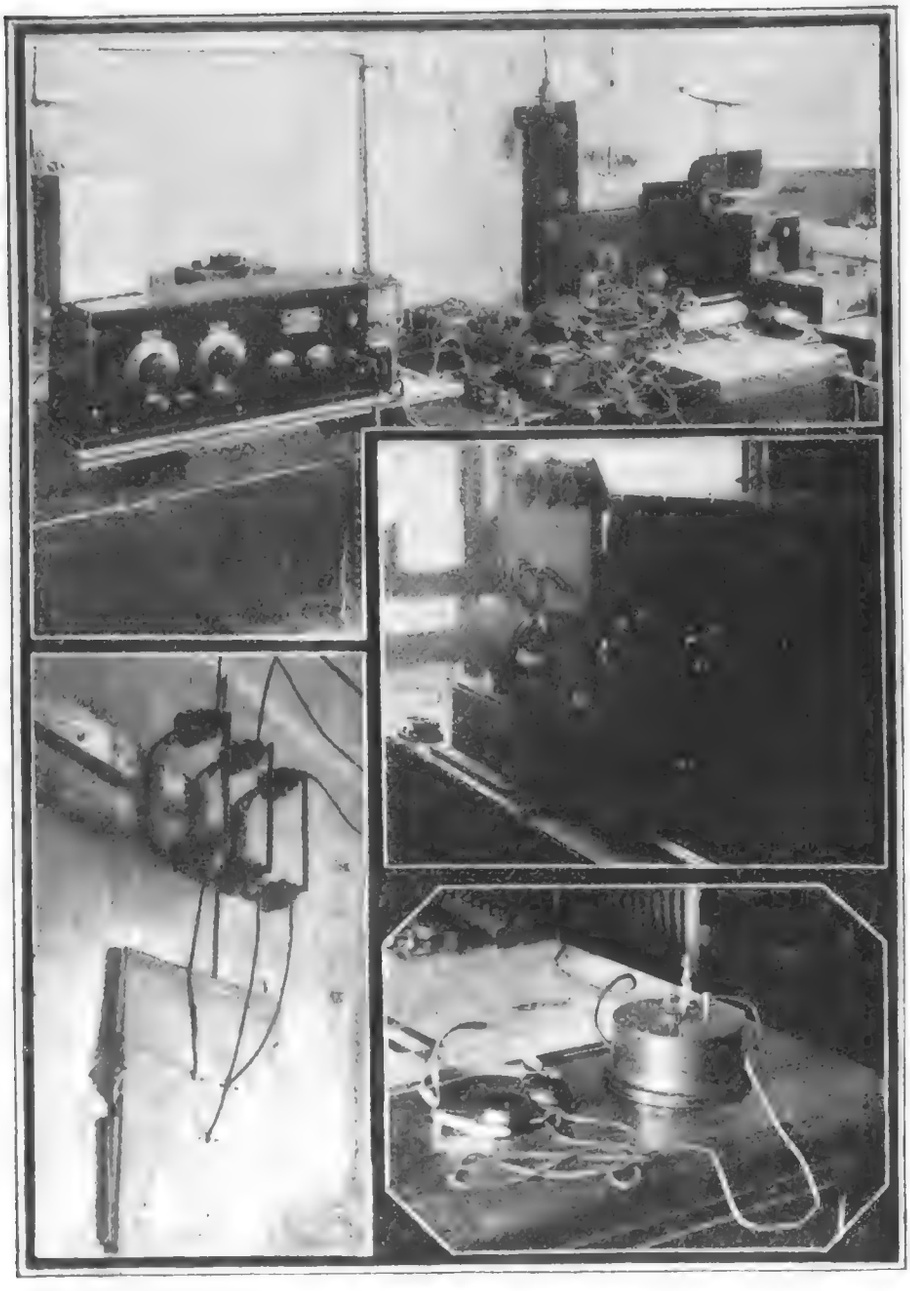

Top: A Loop Receiver For Relaying Radiophone Broadcasting From the Receiving Antenna to the Electric Light Line. Lower Left: The Condenser Arrangement for Feeding Wired Radio Messages Into a Three Phase Transmission Line. Upper Right: Experimental Transmitting Apparatus for Wired Radio. Lower Right: Crystal Receiver With Tuning Condenser for Reception of Wired Radio From the Electric Light Lines.

IT has remained for the present chaotic condition in the broadcasting situation to bring into due prominence some of the actual work being done in utilizing the transmission lines of a central power station for radio communication purposes, an idea advanced as early as 1911. Wired radio, as the name suggests, is a scheme of transmitting currents of high frequency along a system of conductors which then serves as the connecting link between the transmitter and the receiver. In space radio, the transmission medium which serves the above purpose is the hypothetical ether.

Wired radio is the invention of Major-General George Owen Squier, Chief Signal Officer of the United States Army. An ...ve interest has been shown by Maj.-Gen. ...er in the present as well as in past ex...nts and tests of his system.

...rder to collect the necessary data, before placing the system into commercial use, exhaustive experiments had to be carried out to determine the peculiarities, if any, in the characteristics of wired radio transmission. For this purpose, a series of extended tests were carried out in various cities such as Cleveland, New York and Washington, D. C. The co-operation of the Radio Section of the Bureau of Standards was obtained in the last mentioned city. As a result of these experiments interesting observations were recorded, which proved of considerable value when the commercial project was launched.

Some apprehension was felt from the start relative to the character of the light and power distribution system. The method of distribution of electric light and power generally utilized in most cities where alternating current is used is as follows: Primary generation of current takes place at the central station at voltages ranging from 5,000 to 15,000 volts, three phase, and is distributed to the several substations at this voltage. At the substations this current is transformed to between 2,000 and 3,000 volts, also three phase, and redistributed to the areas where the consumers are located. The various distribution transformers located along the line reduce the voltage to approximately 110 volts, single phase, in which form it is finally used. In order that the broadcast service be supplied to the maximum number of customers with the minimum losses occurring in the intermediate power apparatus connected to the line, it is necessary for the transmitter to operate into the 2,000 to 3,000 volt line.

It had been a relatively easy task to transmit by wired radio over a long transmission line, where an unobstructed flow was offered to the high frequency currents from the transmitter to the receiver, the line providing a direct path for the signal.

Furthermore, it was found that with the proper choice of wave-length for any given installation practically all of the energy transferred to the line would be propagated to its destination by conduction and no appreciable amount of energy would be lost by radiation in the form of electromagnetic waves. From a study of the theory, it was expected that with decreasing wave-lengths, the attenuation suffered by the transmitted energy would increase and that abnormally large powers would have to be used to cover a given distance. However, actual tests showed that extremely long wave-lengths gave very poor results and that an optimum wave-length exists at which no appreciable radiation into space occurs, at the same time the same wave-length provides good wired radio service. During tests on one line, short wave-lengths up to 710 meters gave considerable radiation as evidenced by reception on an antenna, while 13,000 meters gave poor reception on an antenna and also by wired radio, showing, in this case, that the wave-lengths chosen were ill fitted to be used successfully on that particular line. Excellent wired radio reception, with almost nil reception on an antenna was obtained when using a wave-length of 3,800 meters.

When using short wave-lengths, the existence of "blind spots" was relatively frequent. At these spots no reception could be obtained, due apparently to the fact that standing waves were formed through the reflection of the high frequency currents by the power apparatus on the line. At the nodes of these stationary waves no reception was possible while maximum signal strength was obtainable at the loops.

At the present time, the Richmond Light and Railroad Company of Staten Island, New York, has a wired radio broadcasting station in operation at the Livingston power house. Special receivers, both crystal and vacuum tube type, have been developed for use on the company's electric light lines.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

Colonel Heezaliar Flirts With Radio

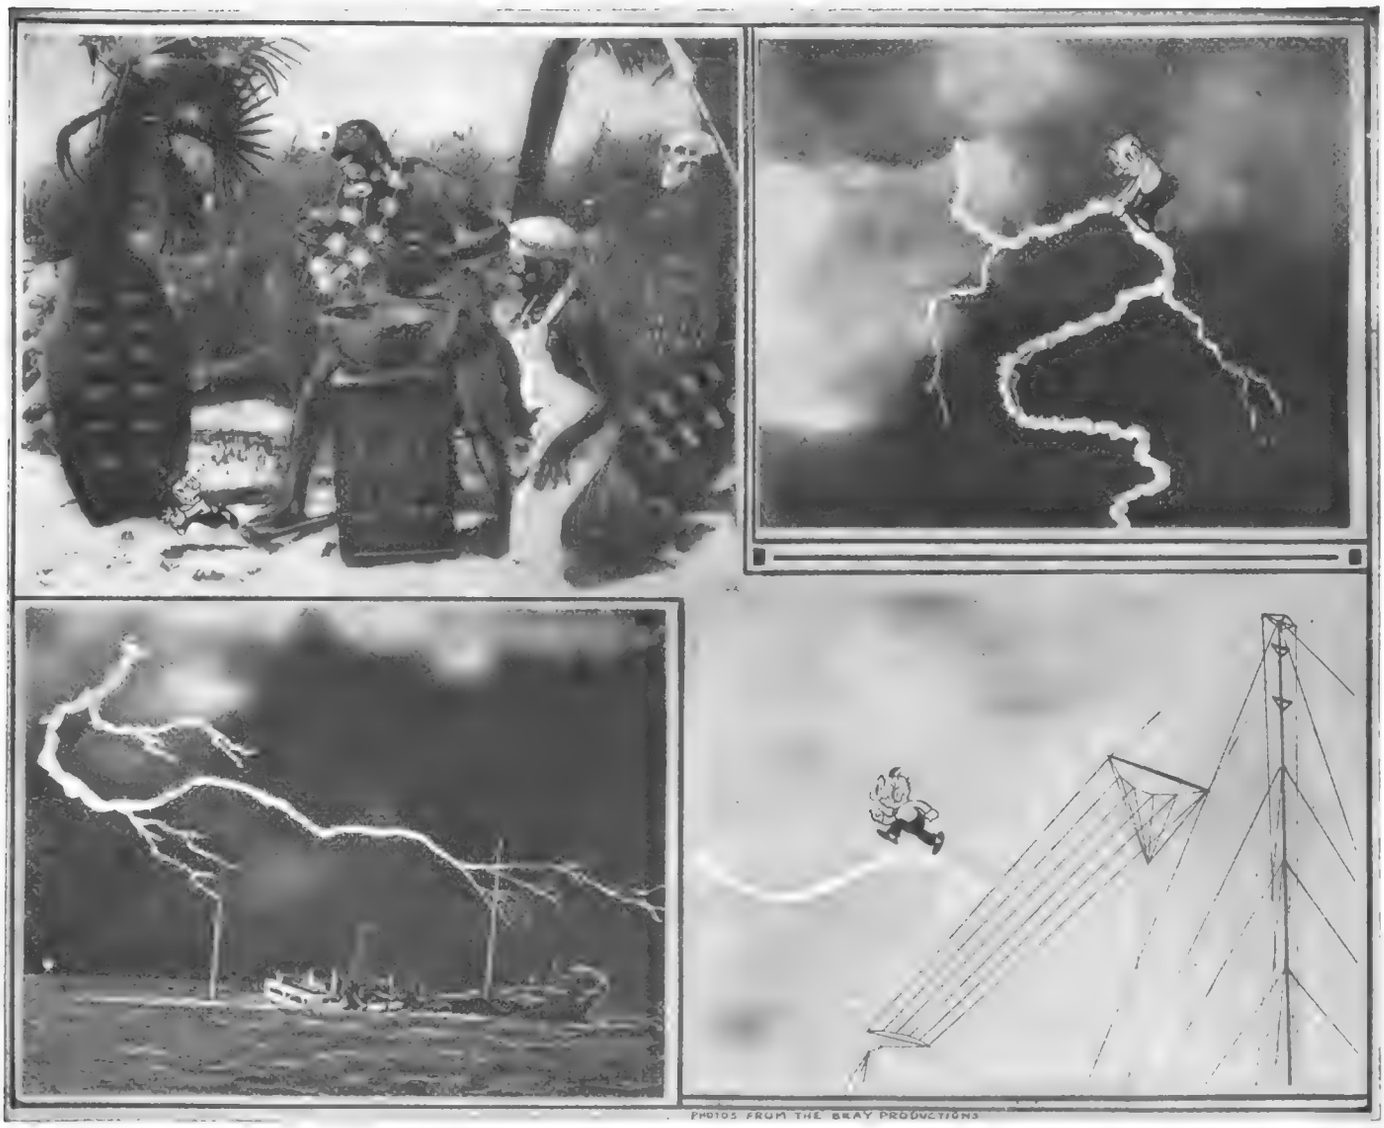

PHOTOS FROM THE BRAY PRODUCTIONS

Upper Left Hand Photo Shows the Cannibals Trying to Stamp Out Col. Heezaliar's Life. Below This the Ship Struck By Lightning Is Rapidly Sinking. Upper Right Hand Photo Shows Heezaliar Sliding Down the Lightning, and the Photo Below Illustrates How He Ran On the Radio Wave.

VERY startling effects can be produced by combining cartoons with motion pictures. For instance, in one of the Colonel Heezaliar films we see the artist sketching the Colonel. The artist then draws a lake and the Colonel intimates that it is too hot to work, so he dives into the lake and swims around. The artist meanwhile has his attention distracted by a report in the newspaper that a great many vessels have sailed for Treasure Island and expect to find hidden gold there.

The Colonel becomes a nuisance in his efforts to determine what the artist is reading, and is forcibly thrown against the easel from which he has escaped. Desiring revenge he slides from the easel again and makes his way to an open window. By crawling and jumping he disappears through the window and reaches the roof where a radio station and its operator are found. Here he informs the operator that he would like to be placed on a ship near to Treasure Island, and desires to be transmitted there by radio. The operator picks up Colonel Heezaliar, pastes him to a cardboard and pushes him into a slot conveniently located in some peculiar part of his grotesque transmitting station, and then presses the key. On the roof of the building one can see a picture of the antenna and the undulating current being emitted therefrom. Suddenly the lead-in commences to swell progressively, and Heezaliar wobbles out through the top of the L-type antenna and runs along the wave.

We cut in now to a scene where a ship is sinking in mid-ocean. Heezaliar, who has been shot into the clouds by the radio wave, decides to leave them, and when the proper bolt of lightning flashes from the sky striking the ship, and straightens out to form a very fine sliding pole similar to the ones used by the firemen in their company houses, Heezaliar slides down and lands on the deck of the sinking vessel, which is, by the way, nearest to Treasure Island. On the vessel but a short while, Heezaliar realizes that it is impossible to stay there as the ship is sinking rapidly. He makes his get-a-way in a bottle cast upon the waves, and is washed ashore on a cannibal island. One of the cannibals scouting the beach discovers the bottle, and extracting the cork therefrom, withdraws the Colonel. Throwing him to the ground he attempts to step on him, but Heezaliar eludes the cannibal's feet. Eventually captured, Heezaliar finds himself in a cauldron for the next meal.

Photos courtesy of Bray Productions.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

Utilizing Wired Radio for Broadcasting

By BERT T. BONAVENTURE

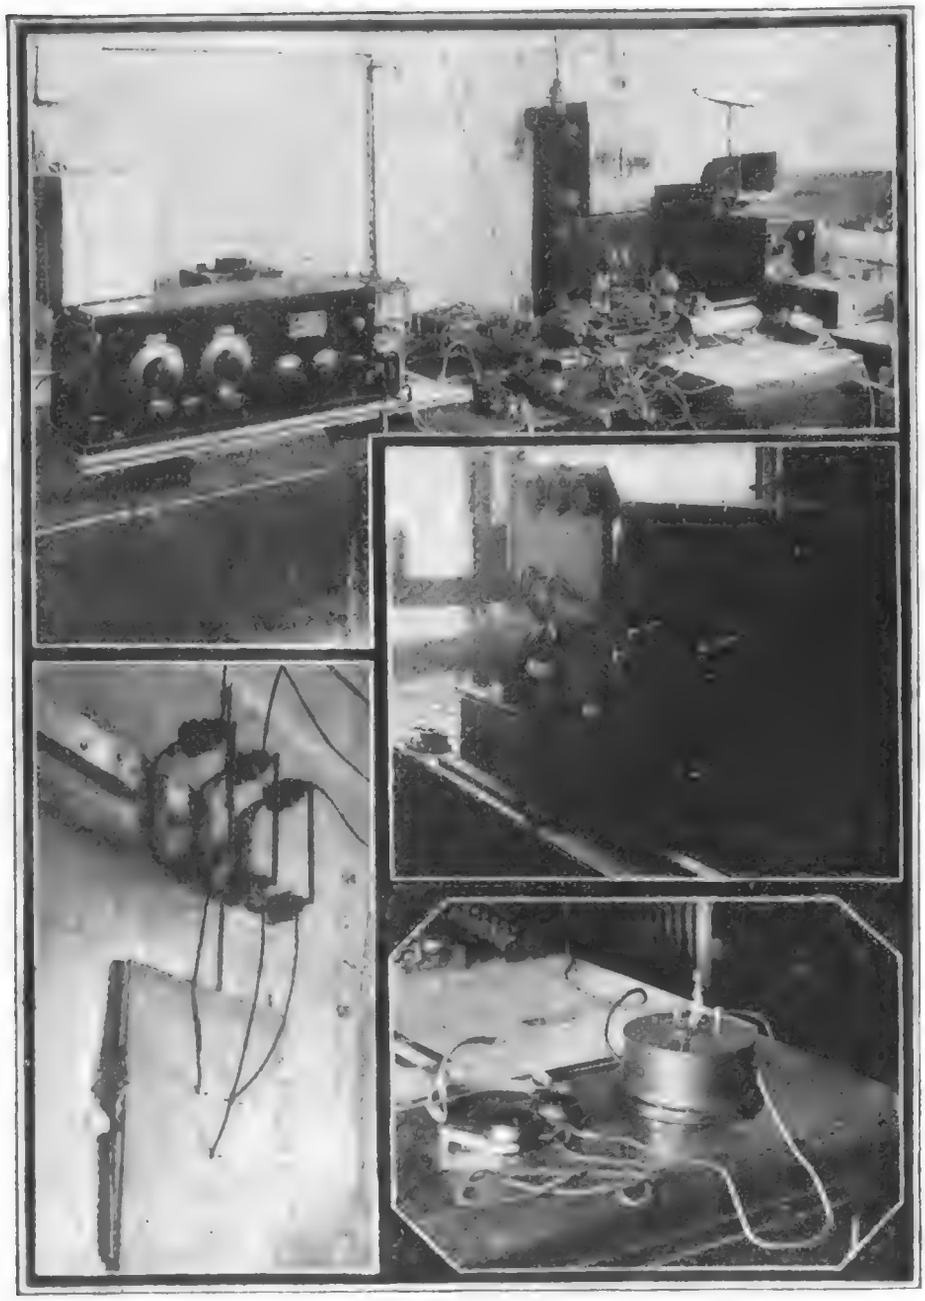

Top: A Loop Receiver For Relaying Radiophone Broadcasting From the Receiving Antenna to the Electric Light Line. Lower Left: The Condenser Arrangement for Feeding Wired Radio Messages Into a Three Phase Transmission Line. Upper Right: Experimental Transmitting Apparatus for Wired Radio. Lower Right: Crystal Receiver With Tuning Condenser for Reception of Wired Radio From the Electric Light Lines.

IT has remained for the present chaotic condition in the broadcasting situation to bring into due prominence some of the actual work being done in utilizing the transmission lines of a central power station for radio communication purposes, an idea advanced as early as 1911. Wired radio, as the name suggests, is a scheme of transmitting currents of high frequency along a system of conductors which then serves as the connecting link between the transmitter and the receiver. In space radio, the transmission medium which serves the above purpose is the hypothetical ether.

Wired radio is the invention of Major-General George Owen Squier, Chief Signal Officer of the United States Army. An active interest has been shown by Maj.-Gen. Squier in the present as well as in past experiments and tests of his system.

In order to collect the necessary data, before placing the system into commercial use, exhaustive experiments had to be carried out to determine the peculiarities, if any, in the characteristics of wired radio transmission. For this purpose, a series of extended tests were carried out in various cities such as Cleveland, New York and Washington, D. C. The co-operation of the Radio Section of the Bureau of Standards was obtained in the last mentioned city. As a result of these experiments interesting observations were recorded, which proved of considerable value when the commercial project was launched.

Some apprehension was felt from the start relative to the character of the light and power distribution system. The method of distribution of electric light and power generally utilized in most cities where alternating current is used is as follows: Primary generation of current takes place at the central station at voltages ranging from 5,000 to 15,000 volts, three phase, and is distributed to the several substations at this voltage. At the substations this current is transformed to between 2,000 and 3,000 volts. also three phase, and redistributed to the areas where the consumers are located. The various distribution transformers located along the line reduce the voltage to approximately 110 volts, single phase, in which form it is finally used. In order that the broadcast service be supplied to the maximum number of customers with the minimum losses occurring in the intermediate power apparatus connected to the line, it is necessary for the transmitter to operate into the 2,000 to 3,000 volt line.

It had been a relatively easy task to transmit by wired radio over a long transmission line, where an unobstructed flow was offered to the high frequency currents from the transmitter to the receiver, the line providing a direct path for the signal.

Furthermore, it was found that with the proper choice of wave-length for any given installation practically all of the energy transferred to the line would be propagated to its destination by conduction and no appreciable amount of energy would be lost by radiation in the form of electromagnetic waves. From a study of the theory, it was expected that with decreasing wave-lengths, the attenuation suffered by the transmitted energy would increase and that abnormally large powers would have to be used to cover a given distance. However, actual tests showed that extremely long wave-lengths gave very poor results and that an optimum wave-length exists at which no appreciable radiation into space occurs, at the same time the same wave-length provides good wired radio service. During tests on one line, short wave-lengths up to 710 meters gave considerable radiation as evidenced by reception on an antenna, while 13,000 meters gave poor reception on an antenna and also by wired radio, showing, in this case, that the wave-lengths chosen were ill fitted to be used successfully on that particular line. Excellent wired radio reception, with almost nil reception on an antenna was obtained when using a wave-length of 3,800 meters.

When using short wave-lengths, the existence of "blind spots" was relatively frequent. At these spots no reception could be obtained, due apparently to the fact that standing waves were formed through the reflection of the high frequency currents by the power apparatus on the line. At the nodes of these stationary waves no reception was possible, while maximum signal strength was obtainable at the loops.

At the present time, the Richmond Light and Railroad Company of Staten Island, New York, has a wired radio broadcasting station in operation at the Livingston power house. Special receivers, both crystal and vacuum tube type, have been developed for use on the company's electric light lines.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

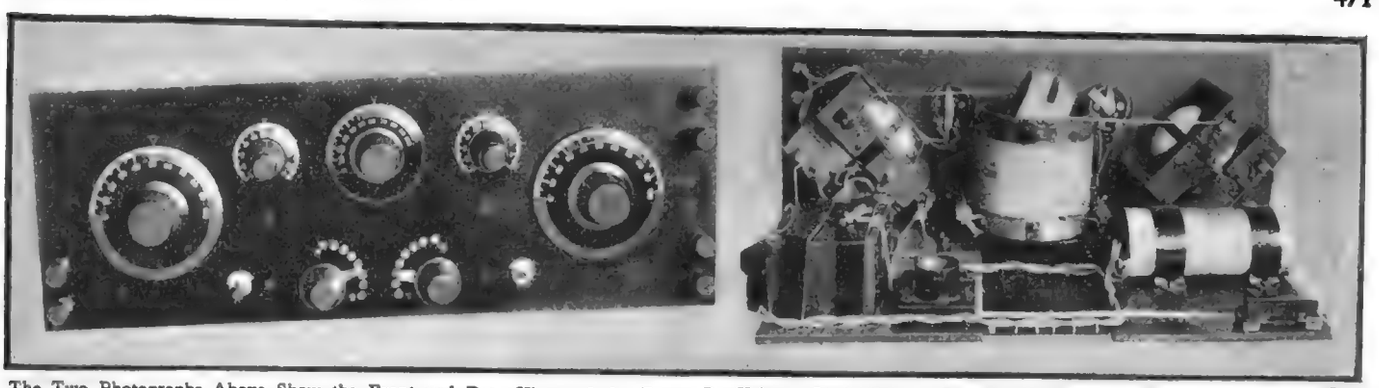

The Two Photographs Above Show the Front and Rear Views of the Extremely Efficient Single Tube Radio Receiving Set Described in the Text. By Using a Little Care in Laying Out the Set, it is Possible to Produce a Very Finished Instrument.

1 Grid condenser, 0.00025 Mfd.
1 2 Megohm grid leak.
1 Phone condenser 0.001 Mfd.
2-4" dials.
1-3" dial.
1-2" dial to match rheostat dial (goes on potentiometer shaft)
6 Binding posts
1 "B" battery, 22½ V.
1 Dry cell
2 Pieces of wood for sub-base and shelf 11" x 7" x ¼"
4 Brass angles as per Fig. 1
Leather strapping.

Fig. 2 shows the layout of the panel, giving the center lines of the holes to be drilled for the shafts of the various instruments. No attempt has been made to give the dimensions of the mounting holes, as these will vary with the type of apparatus used. The heads of the six 8/32 flat head machine screws, which hold the brass brackets against the panel, were lacquered in dull black to render them less conspicuous. A brass strip has been fastened at the rear of the sub-bases to give added rigidity and prevent a possible sideplay in the shelves. The photograph of the rear of the set shows this strip clearly.

If the builder does not like an arrangement that runs as deep into the rear of the panel, the self-contained A and B batteries may be omitted and the binding posts used. It is convenient, however, to have everything in the cabinet.

OPERATING THE SET

As to operating the receiver, the primary circuit is first tuned by means of the units and multiple switch taps, following up this operation with the tuning of the grid and plate circuits by means of the two variometers. Tune with a hand on each variometer dial, following the grid tuning with the plate variometer. Quite precise tuning can be accomplished with the coupling control after the plate and grid variometers have been set for a given signal; the method should be in more general use.

New Vacuum Tube With Nine Lives

A NEW model Radiotron tube known as the UV-199 has recently been put on the market and become an instantaneous success. A new tungsten filament has been placed in this tube which consumes only .06 ampere at 4½ volts. The total wattage consumed is only 1/27th of the amount used in the UV-201 tube, but the new audion has characteristics which render it better for use in a radio set than the old type of tube. With 80 volts on the plate and a negative bias battery, the watts drawn from the "B" battery are slightly greater than the watts drawn from the "A" battery.

Due to extremely low current consumption of this new tube it can be very economically run on ordinary three cell flashlight batteries. In fact, No. 6 dry cells will last for about a year when used with this tube under ordinary circumstances and usage.

AN EXCELLENT RADIO FREQUENCY AMPLIFIER

This new tube can very well be used in radio frequency amplifiers where it gives exceptional results due to the fact that its internal capacity is very low.

It is practically impossible to burn out this tube because when too much current is supplied to the filament, the electronic emission automatically falls off and the tube becomes inoperative. In order to bring it back to a normal state it is necessary to burn the filament of the tube for some time without any plate battery connected in the circuit. The length of time required for recuperation is dependent upon the length of time at which the tube was operated at abnormal voltage.

When interference and static are at a minimum the grid leak should have a value of from six to ten megohms. However, with severe QRM or static the leak should have a resistance of about two megohms. In general a five megohm leak will give very satisfactory results under all conditions.

GRID BIAS NECESSARY

When these new tubes are used as amplifiers it is quite necessary that a grid bias battery be used. This should be inserted in the transformer to filament lead and should have the negative side connected to the transformer. The following values will be found to give good results for various voltages on the plate. With 40 volts on the plate use from .5 to 1 volt grid bias, for 60 volts, 1 to 3 volts bias, and for a plate voltage of 80 use 3 to 4.5 volts between the filament and the transformer.

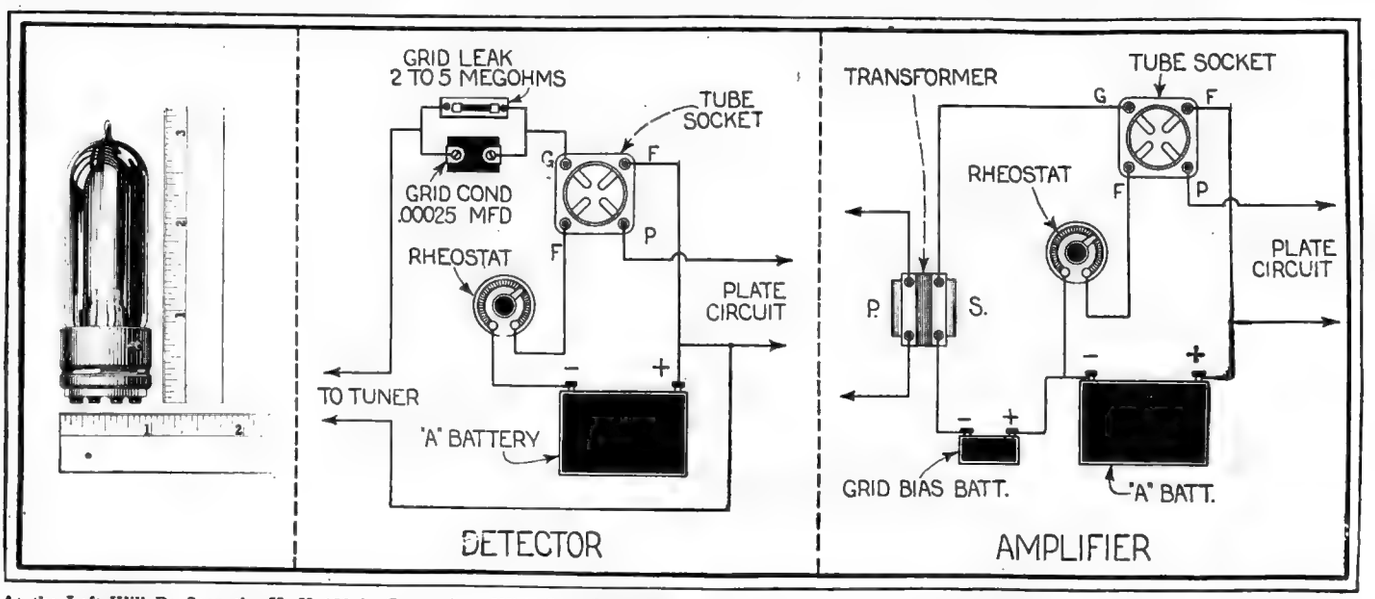

At the Left Will Be Seen the U. V.-199 in Comparison With Two Standard Rulers. Its Small Size Can Be Readily Seen. The Second Illustration Shows How the Connections to the Filament Circuit Should Be Made When the Tube is Used as a Detector, While the Third Illustration Shows What Changes Should Be Made in This Circuit When the Tube is Used as an Amplifier. These Connections are Quite Important.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

PORTABLE "DX" RECEIVER

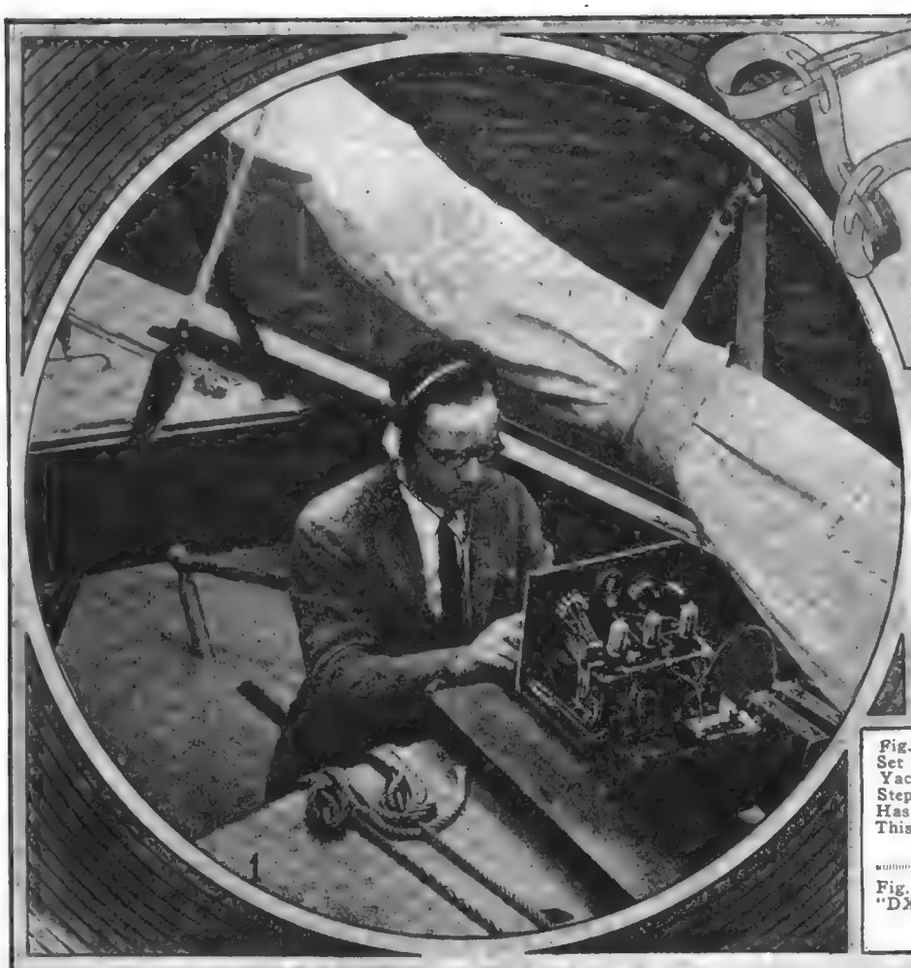

Fig. 1 At Left Shows the Portable Vacation Radio Set Described by Mr. Price in Use on a Pleasure Yacht. This Set Comprises a Detector and Two Step Audio Frequency Amplifier. This Receiving Set Has Been Designed and Tried Out by Experts and This Article Will, Therefore, Be of Unusual Value and Interest to All of Our Radio Readers.

Fig. 2 Above Shows Front Panel View of the Portable "DX" Receiver. The Controls for Tuning Are Simple, Considering the Fine Selectivity Possible.

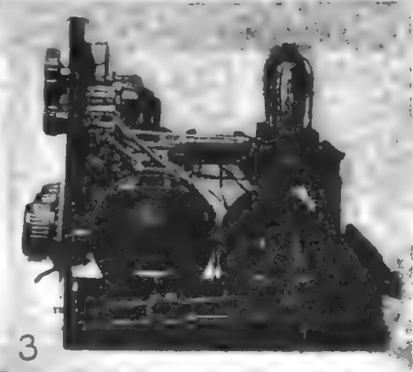

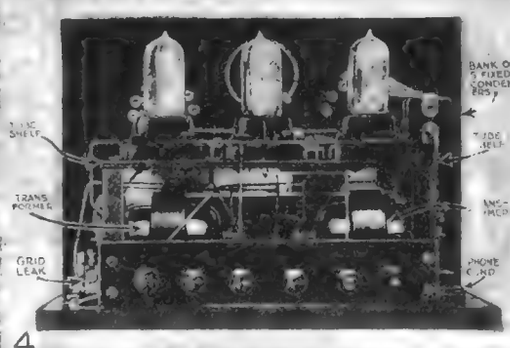

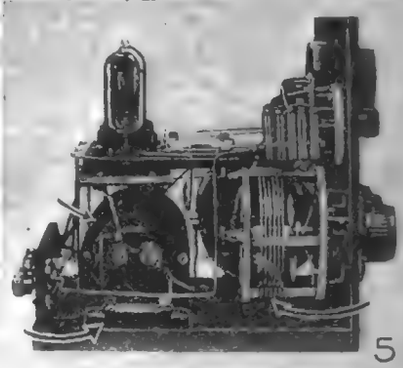

Fig. 3 at Left Shows the View From the Right Side or Tickler End of the Portable "DX" Receiving Set. It is a Good Idea to Mount the Vacuum Tube Sockets on a Shelf or Frame Supported on Sponge Rubber or Else on Rubber Bands, to Absorb Any Vibration or Jars; Especially if the Set Is to Be Carried on a Boat or Automobile. Fig. 4 Above Shows the Rear View of the Portable "DX" Set, While Fig. 5 at the Extreme Right Shows a View From the Left or Condenser Side of the Outfit.

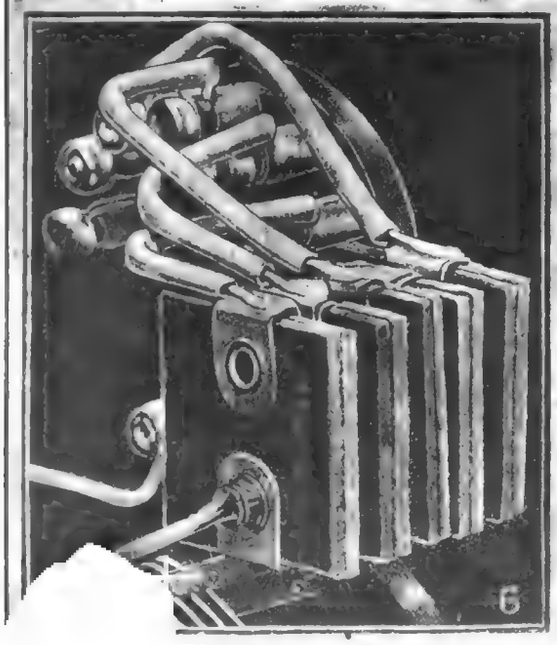

Fig. 6, at Left, Shows the Bank of Small Mica Condensers Used in Series with the Antenna in the Place of the Usual Variable Condenser. This Bank of Condensers May Be Substituted by a Variable Condenser if Desired, However, as the Author Points Out. A Switch Enables the Operator to Connect in as Many of These Condensers as Necessary.

Fig 7 at Right Shows a Top View of the "DX" Portable Receiving Set.

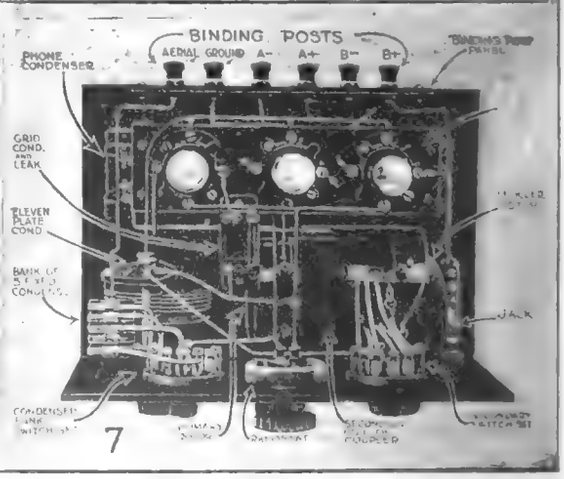

Digitized by Google
Original from UNIVERSITY OF CHICAGO

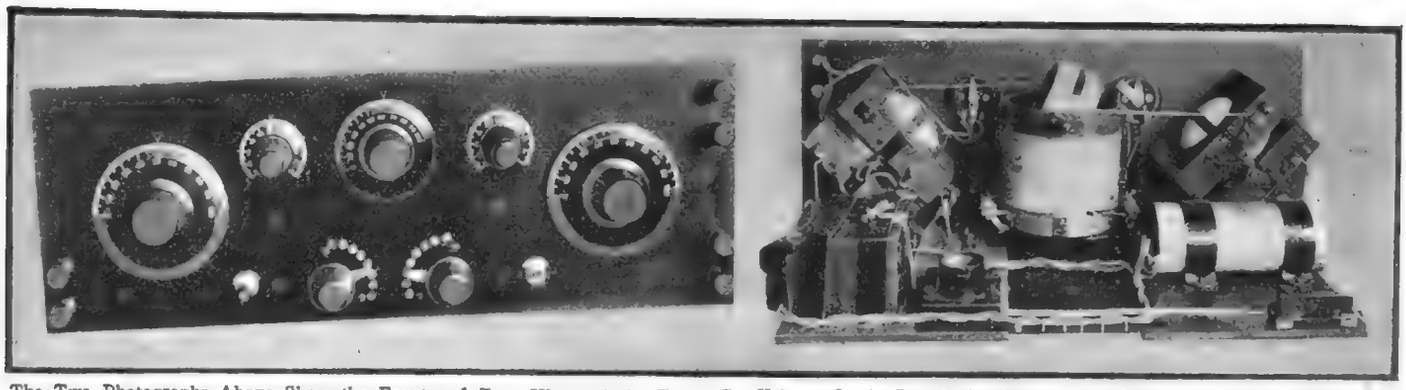

The Two Photographs Above Show the Front and Rear Views of the Extremely Efficient Single Tube Radio Receiving Set Described in the Text. By Using a Little Care in Laying Out the Set, it is Possible to Produce a Very Finished Instrument.

1 Grid condenser, 0.00025 Mfd.
1 2 Megohm grid leak.
1 Phone condenser 0.001 Mfd.
2-4" dials.
1-3" dial.
1-2" dial to match rheostat dial (goes on potentiometer shaft)
6 Binding posts
1 "B" battery, 22½ V.
1 Dry cell
2 Pieces of wood for sub-base and shelf 11" x 7" x ¼"
4 Brass angles as per Fig. 1
Leather strapping.

Fig. 2 shows the layout of the panel, giving the center lines of the holes to be drilled for the shafts of the various instruments. No attempt has been made to give the dimensions of the mounting holes, as these will vary with the type of apparatus used. The heads of the six 8/32 flat head machine screws, which hold the brass brackets against the panel, were lacquered in dull black to render them less conspicuous. A brass strip has been fastened at the rear of the sub-bases to give added rigidity and prevent a possible sideplay in the shelves. The photograph of the rear of the set shows this strip clearly.

If the builder does not like an arrangement that runs as deep into the rear of the panel, the self-contained A and B batteries may be omitted and the binding posts used. It is convenient, however, to have everything in the cabinet.

OPERATING THE SET

As to operating the receiver, the primary circuit is first tuned by means of the units and multiple switch taps, following up this operation with the tuning of the grid and plate circuits by means of the two variometers. Tune with a hand on each variometer dial, following the grid tuning with the plate variometer. Quite precise tuning can be accomplished with the coupling control after the plate and grid variometers have been set for a given signal; the method should be in more general use.

New Vacuum Tube With Nine Lives

A NEW model Radiotron tube known as the UV-199 has recently been put on the market and become an instantaneous success. A new tungsten filament has been placed in this tube which consumes only .06 ampere at 4½ volts. The total wattage consumed is only 1/27th of the amount used in the UV-201 tube, but the new audion has characteristics which render it better for use in a radio set than the old type of tube. With 80 volts on the plate and a negative bias battery, the watts drawn from the "B" battery are slightly greater than the watts drawn from the "A" battery.

Due to extremely low current consumption of this new tube it can be very economically run on ordinary three cell flashlight batteries. In fact, No. 6 dry cells will last for about a year when used with this tube under ordinary circumstances and usage.

AN EXCELLENT RADIO FREQUENCY AMPLIFIER

This new tube can very well be used in radio frequency amplifiers where it gives exceptional results due to the fact that its internal capacity is very low.

It is practically impossible to burn out this tube because when too much current is supplied to the filament, the electronic emission automatically falls off and the tube becomes inoperative. In order to bring it back to a normal state it is necessary to burn the filament of the tube for some time without any plate battery connected in the circuit. The length of time required for recuperation is dependent upon the length of time at which the tube was operated at abnormal voltage.

When interference and static are at a minimum the grid leak should have a value of from six to ten megohms. However, with severe QRM or static the leak should have a resistance of about two megohms. In general a five megohm leak will give very satisfactory results under all conditions.

GRID BIAS NECESSARY

When these new tubes are used as amplifiers it is quite necessary that a grid bias battery be used. This should be inserted in the transformer to filament lead and should have the negative side connected to the transformer. The following values will be found to give good results for various voltages on the plate. With 40 volts on the plate use from .5 to 1 volt grid bias, for 60 volts, 1 to 3 volts bias, and for a plate voltage of 80 use 3 to 4.5 volts between the filament and the transformer.

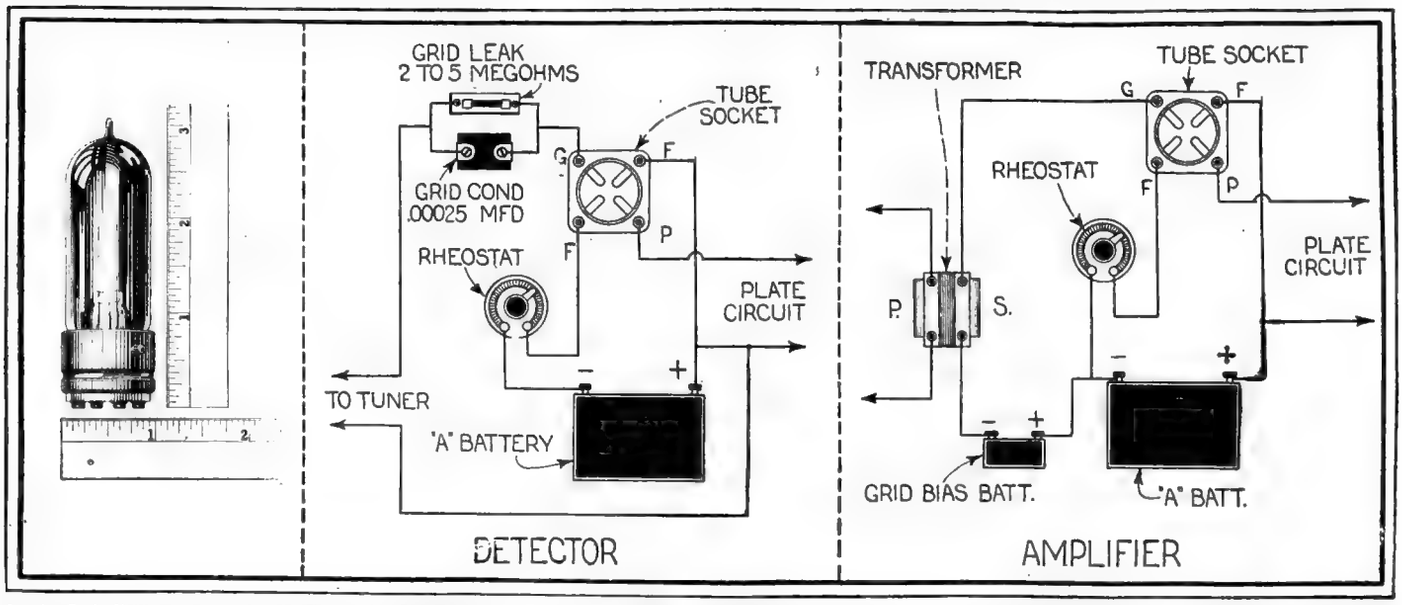

At the Left Will Be Seen the U. V.-199 in Comparison With Two Standard Rulers. Its Small Size Can Be Readily Seen. The Second Illustration Shows How the Connections to the Filament Circuit Should Be Made When the Tube is Used as a Detector, While the Third Illustration Shows What Changes Should Be Made in This Circuit When the Tube is Used as an Amplifier. These Connections are Quite Important.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

Pitfalls of the Radio Inventor

By EVERETT N. CURTIS

(DON'T FAIL TO READ THIS VALUABLE ADVICE ON PATENTS)

MANY engaged in research and experimental work, often victims of their own lack of knowledge, or of inertia, unwilling or unable to acquaint themselves with well known principles underlying the patent law, are prone, when finding themselves in a dis-

Publishing an Idea in a Magazine Gives You Protection for a Period of Two Years. You Should Apply for a Patent Within This Time, or Else Patent Proceedings Are Not Possible.

agreeable situation into which their ignorance has led them, to blame the law or some person who they think has taken advantage of their necessities and has caused them to lose valuable patent rights. The purpose of this article is to point out some of the pitfalls into which the inventor falls, for his descent into which he himself through ignorance is mainly to blame, and to indicate ways and means by which such errors may be avoided.

RECORDS ARE IMPORTANT

Generally speaking the inventor is woefully unaware of the importance of keeping records and drawings of his invention and of preserving evidence of the earliest date thereof, the dates of disclosures to others, and the dates of reduction to practice. He is ignorant of the bearing which the prior art or prior knowledge and use or the prior years statutory bar or abandonment of his invention, has upon his rights before he applies for a patent. He is ignorant of the effect of many years of concealed use of his invention such as for example, a secret process. He is ignorant of the effect of filing an application without a full disclosure of his invention and without adequate claims covering its full scope. He is ignorant of the requirement that all applications for patent in this country must be filed by the inventor, and that the filing by joint inventors, (so-called) is in many cases a snare and a delusion and likely to result in the patent being declared void. He is ignorant of the necessity of guarding against the disclosure of his invention to the world by the issuance of the patent in this country, until he has protected his right by filing in foreign countries. He is ignorant of his rights when he makes an invention while employed by others, where such invention is in the same line of work as that of his employment. He is ignorant of the effect of licenses and assignments, and the duty imposed by law of recording assignments at the Patent Office at Washington. He is ignorant of the fact that in any event all he obtains from a patent is the right to exclude others from the patent domain if his patent proves valid in the courts, and a right of recovery for his damages or the infringer's profits.

This enumeration may seem at first glance as embracing matters technical in character, such as only to be apprehended by a patent lawyer of mature judgment and experience. The fact is, however, that any person of average intelligence may with little application, acquaint himself with the law sufficiently to safeguard his inventions to the extent and to avoid litigation which otherwise ensue.

Mr. Everett N. Curtis, the author of this article is the lecturer on patent and trade-mark law at Columbia University and is patent solicitor in active practice in New York City. He is the author of Curtis's Manual of the Sherman Law and of a number of monographs. He was graduated from Massachusetts Institute of Technology in 1898, and from the Boston University Law School in 1900.

PATENT LAW IS OLD

The patent law in this country is derived from the English law as it existed at the time of the colonies. Under our constitution it is provided that the Congress shall have power to promote the progress of science and useful arts by securing for limited times to inventors the exclusive right to their discoveries. The word "discoveries" is unfortunate, but is interpreted by the courts to mean the same thing as inventions. Beginning in 1790, a number of patent acts have been passed by Congress, and the law has become finally crystallized in the Acts of 1870 and 1875 as amended to date.

The most important provision of the law is Section 4886, under which it is provided, among other matters, that any person who has invented any new and useful art, machine, manufacture, or composition of matter, or improvement thereon, not known or used by others in this country before his invention or discovery thereof, may obtain a patent. Thus it is provided that in every application for patent there must be present invention, or exercise of the creative faculty; there must be present novelty or newness; and there must be present utility, or usefulness. It is also provided in effect in the same section that a publication, either here or abroad, *two years prior to the filing of the application or a two years public use or sale in this country prior to the filing of the application, will preclude the issuance of the patent thereon.* Accordingly underlying the validity of any patent, are the prerequisites of invention, novelty and utility and the so-called statutory bars. Even though the patent be issued, no defendant is precluded from showing that such patent is defective in any one or more of these particulars and accordingly void.

THE RIGHTS A PATENT GIVES TO THE INVENTOR

All that the inventor secures by his patent is the right, in the first instance, to exclude all persons from making, using or selling the inventions covered by it. This, it is true is a very substantial right and includes not only the right to an injunction but also the right to damages and profits. It should be borne in mind, however, that this right is negative in character and is only presumptive, and that a patent may be declared null and void by the courts for a



Protect All of Your Early Drawings and Notes by Having a Notary Sign and Seal the Papers. Or Draw a Sketch With a Description and Mail it to Yourself.

variety of reasons, as for example, that the inventor was not the true inventor, that the so-called invention is not an invention but involves only mechanical skill, that it is not new, or that it will not operate, etc.

All inventions must be regarded in the



The X-Ray as Discovered by Roentgen Was a Truly Basic Invention. While More of a Discovery Than an Invention, It Involved a Basic Fact.

light of the prior state of the art, and measured by the advance which they have made. If they are basic in character and perform a function never before performed, they are termed "primary" or "pioneer" inventions, such as the Goodyear process for vulcanizing rubber, the Morse telegraph, or the Bell telephone, and are construed broadly. If they are improvements upon what has gone before, they are secondary inventions and are narrowly construed. Mere mechanical skill is not invention, neither is mere aggregation, nor doubling of an old structure, nor duplication, nor enlargement, nor mere change of form.

Want of novelty may be shown by prior publications or patents in any language or by any prior knowledge or use accessible to the public. Want of utility may be proved by showing that the so-called invention is inoperative, or that it is injurious to the morals, health or good order of society.

One of the first steps to be pursued by an inventor should be to ascertain whether or not his invention is new, that is if it has patentable novelty. If he is a skilled mechanic, or if he is engaged in a business which brings him into close contact with the art and the trade, he will probably know if there is any commercial device at the time on the market which anticipates his invention. But this tells him little. It is possible that there may be somewhere in the world a prior printed publication accessible to the public showing and describing his device which he has not seen. If there is any such publication, it is probable that there is a copy of the same in the U. S. Patent Office, or perhaps in some public library in any of the great cities. A search therefore at the Patent Office and through technical libraries accessible to the public would probably disclose the publication. In order, however, to be fairly certain there were no prior publications, a very thorough search would be required, which would be expensive and perhaps beyond the means of the ordinary inventor, who would have to be satisfied with his own investigation at a public library, where both scientific works and copies of domestic and foreign patents might be accessible, or he might have made for him the usual preliminary examination by some resident patent attorney at Washington, who for a small fee would make a cursory examination of the class of U. S. patents where the invention was likely to be found and would send copies of the nearest patents. Such preliminary examination is often of great advantage, since it will usually disclose any very close references; but the inventor must be cautioned from placing too much dependence upon it, as it is at best only a makeshift and cannot in the nature of things be exhaustive.

(To Be Continued.)

Digitized by Google
Original from UNIVERSITY OF CHICAGO

A DX Portable Receiver With Novel Tuner

By P. A. PRICE

A VACATION dry battery radio tube set that is easy to make, simple to operate and highly efficient—one, of course, that will work equally well at home—has been evolved for the benefit of the radio fans after a long series of tests to determine just what type of set would "deliver the goods" on the vacation and at the same time be within easy reach of Mr. Radio Fan's pocketbook.

Here is a set which can be used in camp, on auto trips, on motor boats or yachting cruises, at the summer home or back home on the old front porch or in the parlor for the stay-at-homes. It has a summer range of 1,000 to 1,500 miles and under ordinary favorable conditions has received California stations at Cleveland, Ohio. Its range for loud speaker use in summer is around 300 miles and most radio fans on their summer outings will be within easy range of broadcasting stations.

NOT A FREAK, JUST A REGULAR SET

This vacation set is not a freak. The circuit used, an ordinary three-circuit hook-up, is tried and tested. It makes use of a primary-secondary-tickler coupler consisting of a secondary stator coil at both ends of which are rotors for the primary and tickler coils. A detailed description of this coupler is given in succeeding paragraphs. The circuit has been used most successfully by amateurs and others and during the test of the model set, Detroit and other stations were tuned in through WJAX, the powerful station of the Union Trust Co., of Cleveland, Ohio.

The detector and two-stage amplifier are mounted on a panel 8x11 inches, the base being 11x7½ inches and ¼ inch thick, making it most compact and handy to stow away as luggage. It may be fitted with a box-like cover and a handle attached for convenience in carrying.

The batteries, of course, are not contained in the set. For vacation use they may be carried along in a separate box, providing tubes using dry cells are utilized. The test set contains three UV-199 tubes, which are connected in parallel and controlled by one 10-ohm rheostat. Three dry cells, connected in series, are used to supply the 4½ volts required for these tubes. It is well to remember that a 25 or 30 ohm rheostat is required for UV-199 tubes when these tubes are used singly on a dry cell battery, and that a 60-ohm rheostat is required when a 6-volt storage battery is used for individual tubes.

Of course if standard 6 volt tubes are used, a 6 volt A battery will be required. With the WD-11 and WD-12 tubes 1½ volt dry cells will be required for the A batteries. In all cases the B battery voltage remains at 45 volts, although 22½ volts may be applied to the detector tube if found best.

The recommended aerial for use with this set is a single wire 100 feet long. For an inside aerial it is recommended to use two, three, or four wires, each as long as possible up to 75 feet, the wires being connected at one end and being left free at the other, the lead-in being attached to the end-connecting wire.

For use in camps a single wire aerial 100 feet long can be strung up between trees, as high as convenient. On a motor trip, the 100 foot single wire aerial may be thrown over a tree branch and attached to the set in the auto, the aerial being properly insulated where it touches the tree. It is not practicable to try to use the set in the car while traveling, although by rigging up a proper aerial and ground this might be done.

If it is desired to use the set on a motor boat or on a yachting trip, an aerial strung from one end of the boat to the other may be used, any metal part of the boat which touches the water being used for ground.

ALL UNNECESSARY PARTS ELIMINATED

In submitting this circuit for the use of radio fans all unnecessary parts have been eliminated. The three vacuum tubes are operated from one rheostat, so that the two stages of amplification are always in use when the set is being operated. The test set was made of the highest grade parts obtainable and thus constructed, the parts, without tubes, phones or batteries, should not cost more than $45.00 or $46.00. With tubes, phones, and batteries the cost should be around $77.00. This, of course, is exclusive of labor.

It is not necessary to use the same parts as described in the test set. Cheaper parts may be used or parts taken from other sets. The only part described and which is necessary to retain is the P-S-T (or primary-secondary-tickler) coupler, and this coupler may be constructed by the radio fan.

The coupler consists of a bakelite tube 4¾ inches long, having a 3-inch diameter. This forms the stator or secondary coupler and upon it are wound 75 turns (60 feet) of No. 21 or 22 silk-covered wire. Taps are taken out at the 40th, 50th, 60th, and 70th turns, on the tickler end of the winding. The winding starts about 1¼ inches from the primary end. The 40-turn tap is for 200 meter work. If broadcasting only is desired no taps need be provided and the entire coil is used.

(*Continued on page* 489)

All Stars

In the September issue of RADIO NEWS will be found a brilliant array of important stars in the radio firmament.

Sir Oliver Lodge, D. SC.; L.L.D.; F.R.S.;

Dr. J. A. Fleming, M.A.; D. SC.; F.R.S.

John Scott Taggart, F. Inst. P.; Member I.R.E.;

Ellis Parker Butler, of "Pigs Is Pigs" fame, and others, appear in this great September issue.

Do not fail to read it!

LIST OF INTERESTING ARTICLES APPEARING IN THE SEPTEMBER ISSUE OF RADIO NEWS

PIONEER WORK IN ETHER WAVES. By Sir Oliver Lodge

ELECTRONS, ELECTRIC WAVES AND WIRELESS TELEPHONY. By J. A. Fleming

A SUPER-SENSITIVE TWO-TUBE RECEIVER. By John Scott-Taggart

THE ALL-PURPOSE RECEIVER. By Milton B. Sleeper

THE MODIFIED REINARTZ RECEIVER. By M. L. Muhleman

CONTINUOUS WAVE AND RADIOPHONE TRANSMITTERS. By L. R. Felder

FACTS ABOUT DX CRYSTAL RECEPTION. By Carl Dreher

MULTI-LAYER COILS. By G. P. Kendall

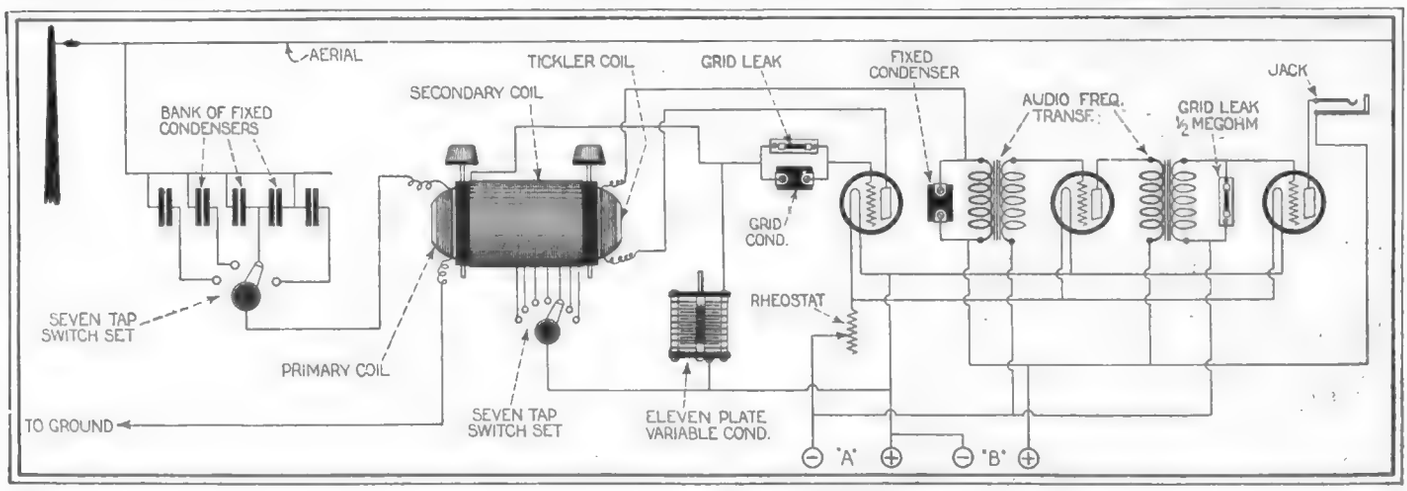

The Specially Designed Receiving Set Fully Described and Illustrated Herewith Will Prove of Exceptional Interest To All of Our Readers, For the Reason That It Has Been Fully Tried Out and Has Been Featured In the Radio Department of One of the Leading American Newspapers. It Is Unusually Selective, and Distant Stations Can Be Heard Even When Nearby Broadcast Stations Are Operating. One of the Novel Features Lies In the Special Tuner Or Compound Variocoupler Which Has a Fixed Secondary, With Rotary Primary and Tickler Coils.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

Pitfalls of the Radio Inventor

By EVERETT N. CURTIS

(DON'T FAIL TO READ THIS VALUABLE ADVICE ON PATENTS)

MANY engaged in research and experimental work, often victims of their own lack of knowledge, or of inertia, unwilling or unable to acquaint themselves with well known principles underlying the patent law, are prone, when finding themselves in a dis-

Publishing an Idea in a Magazine Gives You Protection for a Period of Two Years. You Should Apply for a Patent Within This Time, or Else Patent Proceedings Are Not Possible.

agreeable situation into which their ignorance has led them, to blame the law or some person who they think has taken advantage of their necessities and has caused them to lose valuable patent rights. The purpose of this article is to point out some of the pitfalls into which the inventor falls, for his descent into which he himself through ignorance is mainly to blame, and to indicate ways and means by which such errors may be avoided.

Mr. Everett N. Curtis, the author of this article is the lecturer on patent and trade-mark law at Columbia University and is patent solicitor in active practice in New York City. He is the author of Curtis's Manual of the Sherman Law and of a number of monographs. He was graduated from Massachusetts Institute of Technology in 1898, and from the Boston University Law School in 1900.

RECORDS ARE IMPORTANT

Generally speaking the inventor is woefully unaware of the importance of keeping records and drawings of his invention and of preserving evidence of the earliest date thereof, the dates of disclosures to others, and the dates of reduction to practice. He is ignorant of the bearing which the prior art or prior knowledge and use or the prior years statutory bar or abandonment of his invention, has upon his rights before he applies for a patent. He is ignorant of the effect of many years of concealed use of his invention such as for example, a secret process. He is ignorant of the effect of filing an application without a full disclosure of his invention and without adequate claims covering its full scope. He is ignorant of the requirement that all applications for patent in this country must be filed by the inventor, and that the filing by joint inventors, (so-called) is in many cases a snare and a delusion and likely to result in the patent being declared void. He is ignorant of the necessity of guarding against the disclosure of his invention to the world by the issuance of the patent in this country, until he has protected his right by filing in foreign countries. He is ignorant of his rights when he makes an invention while employed by others, where such invention is in the same line of work as that of his employment. He is ignorant of the effect of licenses and assignments, and the duty imposed by law of recording assignments at the Patent Office at Washington. He is ignorant of the fact that in any event all he obtains from a patent is the right to exclude others from the patent domain if his patent proves valid in the courts, and a right of recovery for his damages or the infringer's profits.

This enumeration may seem at first glance as embracing matters technical in character, such as only to be apprehended by a patent lawyer of mature judgment and experience. The fact is, however, that any person of average intelligence may with little application, acquaint himself with the law sufficiently to safeguard his inventions to some extent and to avoid litigation which might otherwise ensue.

PATENT LAW IS OLD

The patent law in this country is derived from the English law as it existed at the time of the colonies. Under our constitution it is provided that the Congress shall have power to promote the progress of science and useful arts by securing for limited times to inventors the exclusive right to their discoveries. The word "discoveries" is unfortunate, but is interpreted by the courts to mean the same thing as inventions. Beginning in 1790, a number of patent acts have been passed by Congress, and the law has become finally crystallized in the Acts of 1870 and 1875 as amended to date.

The most important provision of the law is Section 4886, under which it is provided, among other matters, that any person who has invented any new and useful art, machine, manufacture, or composition of matter, or improvement thereon, not known or used by others in this country before his invention or discovery thereof, may obtain a patent. Thus it is provided that in every application for patent there must be present invention, or exercise of the creative faculty; there must be present novelty or newness; and there must be present utility, or usefulness. It is also provided in effect in the same section that a publication, either here or abroad, *two years prior to the filing of the application or a two years public use or sale in this country prior to the filing of the application, will preclude the issuance of the patent thereon.* Accordingly underlying the validity of any patent, are the prerequisites of invention, novelty and utility and the so-called statutory bars. Even though the patent be issued, no defendant is precluded from showing that such patent is defective in any one or more of these particulars and accordingly void.

THE RIGHTS A PATENT GIVES TO THE INVENTOR

All that the inventor secures by his patent is the right, in the first instance, to exclude all persons from making, using or selling the inventions covered by it. This, it is true is a very substantial right and includes not only the right to an injunction but also the right to damages and profits. It should be borne in mind, however, that this right is negative in character and is only presumptive, and that a patent may be declared null and void by the courts for a



Protect All of Your Early Drawings and Notes by Having a Notary Sign and Seal the Papers. Or Draw a Sketch With a Description and Mail it to Yourself.

variety of reasons, as for example, that the inventor was not the true inventor, that the so-called invention is not an invention but involves only mechanical skill, that it is not new, or that it will not operate, etc.

All inventions must be regarded in the



The X-Ray as Discovered by Roentgen Was a Truly Basic Invention. While More of a Discovery Than an Invention, It Involved a Basic Fact.

light of the prior state of the art, and measured by the advance which they have made. If they are basic in character and perform a function never before performed, they are termed "primary" or "pioneer" inventions, such as the Goodyear process for vulcanizing rubber, the Morse telegraph, or the Bell telephone, and are construed broadly. If they are improvements upon what has gone before, they are secondary inventions and are narrowly construed. Mere mechanical skill is not invention, neither is mere aggregation, nor doubling of an old structure, nor duplication, nor enlargement, nor mere change of form.

Want of novelty may be shown by prior publications or patents in any language or by any prior knowledge or use accessible to the public. Want of utility may be proved by showing that the so-called invention is inoperative, or that it is injurious to the morals, health or good order of society.

One of the first steps to be pursued by an inventor should be to ascertain whether or not his invention is new, that is if it has patentable novelty. If he is a skilled mechanic, or if he is engaged in a business which brings him into close contact with the art and the trade, he will probably know if there is any commercial device at the time on the market which anticipates his invention. But this tells him little. It is possible that there may be somewhere in the world a prior printed publication accessible to the public showing and describing his device which he has not seen. If there is any such publication, it is probable that there is a copy of the same in the U. S. Patent Office, or perhaps in some public library in any of the great cities. A search therefore at the Patent Office and through technical libraries accessible to the public would probably disclose the publication. In order, however, to be fairly certain there were no prior publications, a very thorough search would be required, which would be expensive and perhaps beyond the means of the ordinary inventor, who would have to be satisfied with his own investigation at a public library, where both scientific works and copies of domestic and foreign patents might be accessible, or he might have made for him the usual preliminary examination by some resident patent attorney at Washington, who for a small fee would make a cursory examination of the class of U. S. patents where the invention was likely to be found and would send copies of the nearest patents. Such preliminary examination is often of great advantage, since it will usually disclose any very close references; but the inventor must be cautioned from placing too much dependence upon it, as it is at best only a makeshift and cannot in the nature of things be exhaustive.

(To Be Continued.)

Digitized by Google
Original from UNIVERSITY OF CHICAGO

BROADCAST-STATIONS

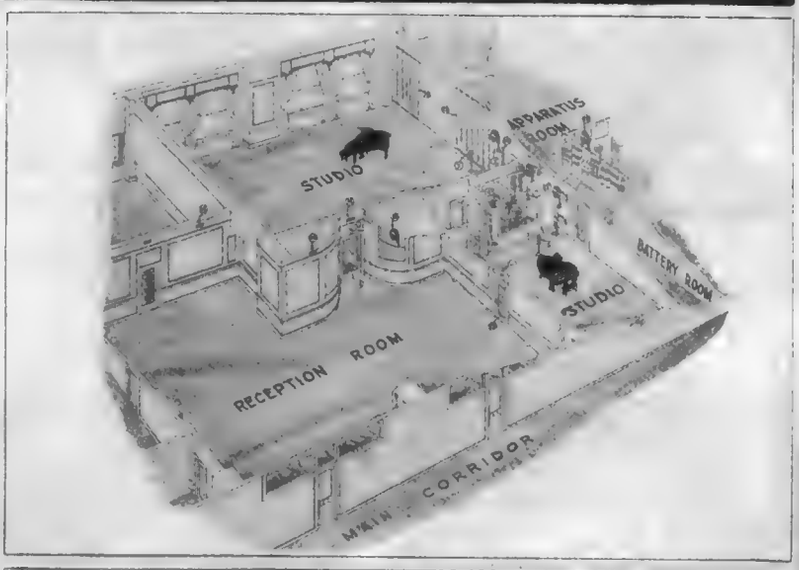

The Photograph At the Left Gives a Comprehensive View of the Aerial and Masts of Station WEAF, of the American Telephone and Telegraph Co., New York City. The Antenna Is Located On the Walker Street Building, and the Studio, a Prospective View of Which Is Shown Above, Is Located At 195 Broadway.

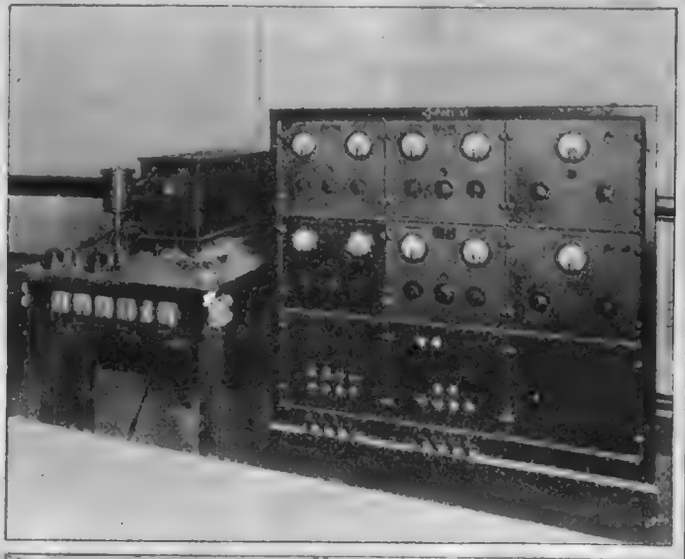

Above: The Operator of Broadcast Central, Controlling Stations WJZ and WJY, New York City. At Right: The Visual "Check Up" Device Which Gives A Sight Record of All Transmission From These Two Stations.

At Left: Studio of WJZ From Which Classical Selections Are Broadcast. Above: Jazz Studio of WIY.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

Radio Oracle

In this Department we publish questions and answers which we feel are of interest to the novice and amateur. Letters addressed to this Department cannot be answered free. A charge of 25c is made for all questions where a personal answer is desired.

LONG AND SHORT WAVE TUNER

(173) Edward Freyer, Holyoke, Mass., requests:

Q. 1. Can you give me a circuit diagram of my present three-circuit tuner which employs a vario-coupler and two variometers with the necessary additions to change over by means of switches to a three-coil honeycomb tuner? I also wish to change my present two-step amplifier to one step of radio frequency amplification and one step of audio frequency amplification. Kindly indicate this in the diagram.

A. 1. You will find the required circuit diagram given in these columns.

If a man 33 years of age is ardently desirous of getting into a really good position, and intends to study from now until he has reached the pinnacle of his career, it is advisable to enter into the Radio field. Best of all would be apprenticing yourself to a Radio-technician or acting as an assistant in a radio research laboratory.

VARIOMETERS WOUND INCORRECTLY

(177) Edwin Converse, Pioneer, Ohio, submits a standard three-circuit tuner diagram and states that his variometers are wound with 74 turns on the stator and 58 turns on the rotor. He says that he is unable to get good results with this circuit and asks:

Q. 1. How can I make this circuit work correctly?

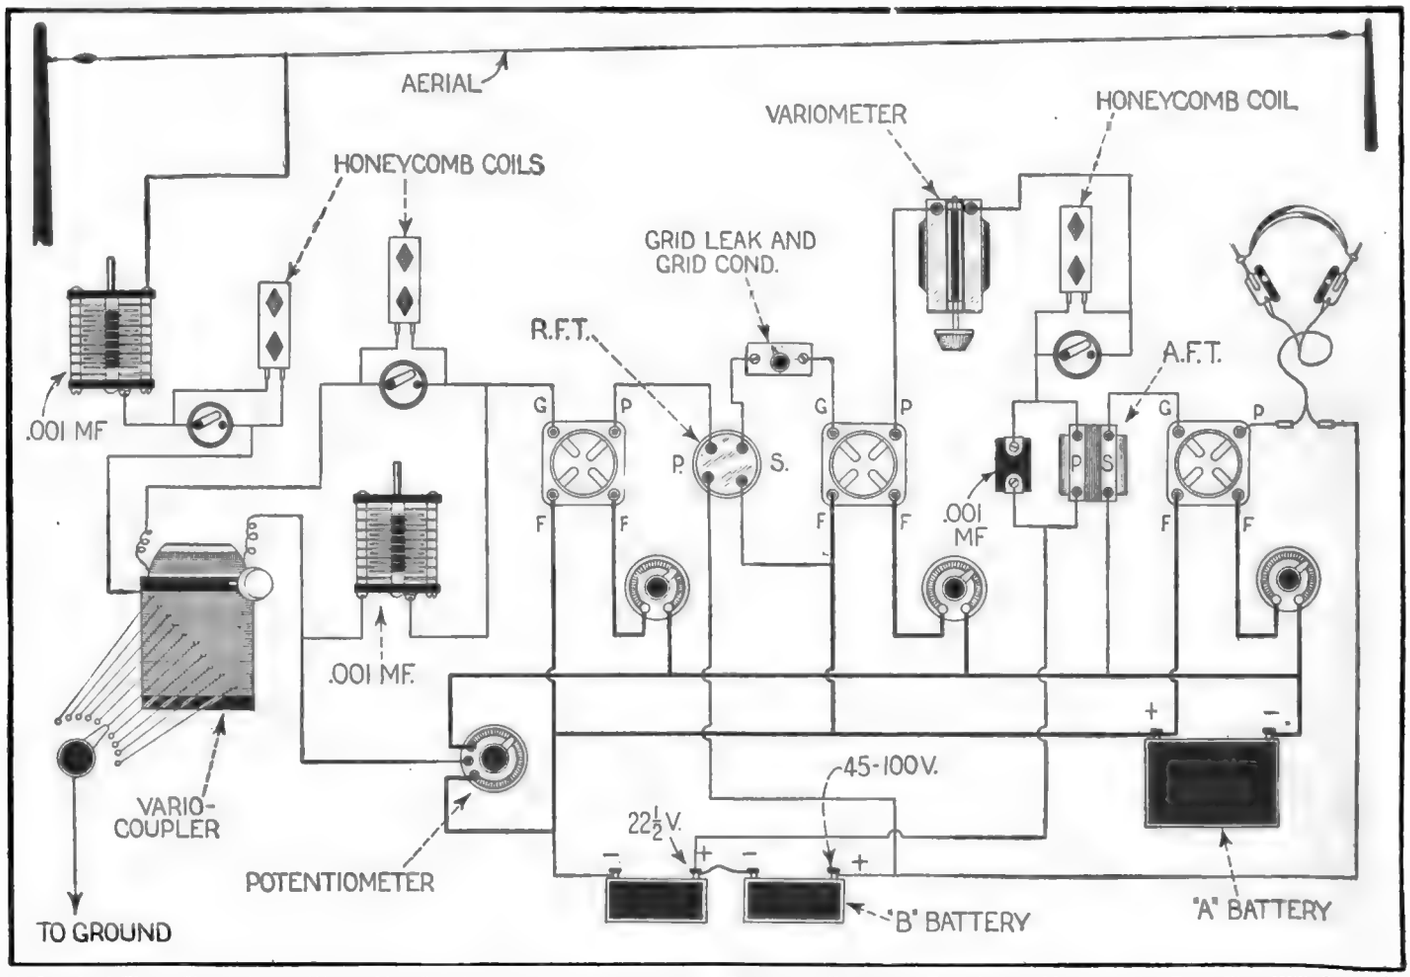

A Standard Three Circuit Tuner Which May Be Used For Receiving Either Short or Long Waves, With One Stage of Radio Frequency Amplification. The Radio Frequency Transformer Must Be of a Type That Will Cover the Band of Wave-Lengths Over Which the Operator Desires the Set To Receive.

110 VOLT AUDIONS

(174) W. F. J. Fischer, Texarkana, Ark.-Tex., asks:

Q. 1. How can I use two burned-out and one new 110-volt electric light bulbs as audion tubes, and how can a four-cell aluminum and lead rectifier be used in the head-set circuit?

A. 1. You cannot use 110-volt electric light bulbs in place of audions in a radio receiving set, nor can you use a 4-cell rectifier in the phone circuit. Allow us to suggest that you purchase some one of the many text-books on radio on the market today, and study them so as to get a better insight into the workings of a radio receiving set.

RADIO ENGINEERING

(175) A. Egli, Lima, Ohio, says that he is a High School graduate, and desires taking up radio engineering. He asks:

Q. 1. Is there a good field open in this work, which would furnish sufficient compensation to make up for any study which will be necessary?

A. 1. A short course in Radio engineering will undoubtedly enable a graduate to secure employment. There is not much danger that the field will be over-supplied by correspondence schools more than it is now.

Undoubtedly, the field will be as great as the telephony field; but the position the individual secures will depend entirely on his own initiative and to what extent he specializes in this work after entering it.

AMPLIFIER TROUBLE

(176) E. C. Fenske, Nanuet, New York, sends us circuit diagram of his set and says that his detector works fine, but gets very little amplification on his second and third tubes. He asks:

Q. 1. Is my circuit diagram correct and if so can you give me any assistance in this matter?

A. 1. There is nothing wrong with your hook-up whatsoever, and if you are unable to obtain good results with your set, we would say that the trouble is with some of the instruments. The only change we would make in your circuit is to shunt a small fixed condenser across the first jack.

It is entirely possible that one or both of your transformers may be either short-circuited, or else may have an open circuit in them. It may also be that your amplifier tubes are not getting the correct filament and plate voltage for their particular characteristics.

We would also suggest that you remove all the tubes from their sockets and clean the ends on the prongs, as well as the brass springs which make contact with the bottom of the tubes, and that you connect the filament side of your secondary to the positive side of the filament, rather than to the negative. This will produce better results

It is within the realm of possibility that you do not have your set connected up exactly as shown in the diagram, or it may be that your connections are not soldered tightly. Whenever you solder a connection, you should always test it by pulling lightly on the wire to see whether or not it will separate from the part to which it is soldered. If it will separate with a slight tug, you may be sure that it was not making a perfect electrical connection.

A. 1. Providing that all of the connections shown in your circuit diagram are correct, we do not see any reason at all why your set should not work with the exception that your variometers are not wound correctly. We would advise you to reduce the number of turns on the stator coils to 56, so that the two coils balance better.

A small fixed condenser shunted across the phones will generally give better results and we would advise you to employ the same.

MORE TROUBLE

(178) Mr. Robert Brandon, Grand Rapids, Mich., says that he has hooked up a set using a loose coupler and an audion detector, but is unable to get any results whatsoever, he asks:

Q. 1. Can you tell me why my set fails to operate and give me some pointers on the same?

A. 1. The reason you do not hear anything with you audion detector set might be any one reason of many. For instance, your "B" battery and filament currents may not be adjusted correctly, or your batteries may not be strong enough. Also, be sure that the polarity of your "B" battery is correct. The positive pole must be connected to the plate.

Regarding this set, we would say that you should go over all your connections carefully and solder all those that are not clamped tight in binding posts. Also, be sure that your loose coupler is in good shape, and that the fine wire on the bobbins of your receivers is not broken. Aso, try adjusting your grid leak.

When you do get signals, a variable condenser, shunted across the secondary of your loose coupler will give much finer tuning.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

BATTERY CONNECTIONS

(179) F. O. Grams, Genoa, Ill., mentions a diagram appearing in this magazine in which the negative of the "B" battery is connected to the positive of the "A" battery. He says that he has used this connection several times and could not receive anything until he connected the negative of the "B" to the negative of the "A." He asks:

Q. 1. Is not the connection you show a mistake?

A. 1. While it is true that some tubes work best with the negative of the "B" battery, connected to the negative of the "A" battery, still other tubes will work best with the negative of the "B" connected to the positive of the "A". It is always best in hooking up a set to try both connections to determine which one is best.

The writer personally has a tube which will work equally well with either connection. Therefore, we do not consider that the point which you brought up is an error.

LONG WAVE RECEIVER

(180) A. J. Guertin, Amsterdam, N. Y., asks:

Q. 1. What instruments would you recommend for a receivnig set which will tune from 200 to 23,000 meters, using one stage of radio frequency amplification and two of audio frequency amplification?

A. 1. In order to tune from 200 to 23,000 meters, it will be necessary to use honeycomb coils for tuning. We give below a diagram showing how to connect one step of radio frequency, a detector and two steps of audio frequency amplification to three honeycombs, used as primary, secondary and tickler. The first, third and fourth tubes are amplifiers, and the second is a detector. The first transformer is of radio frequency type, and the second and third are of audio frequency types. An "A" battery potentiometer is necessary for the correct operation of this circuit. A small fixed condenser with a capacity of about .001 mf. should be connected across the primary of the first audio frequency amplifying transformer. Two .001 mf. variable condensers are used, one shunted across the secondary, and one in series with the primary honeycomb coils. The "B" battery must be so arranged that 22½ volts or slightly more or less, may be applied to the detector tube, and from 45 to 100 to the amplifying tubes. A single 6-volt storage battery may be used for lighting the filaments in this circuit, providing it is of sufficient capacity.

RADIO FREQUENCY TROUBLE

(181) Eugene Fouch, Brooklyn, N. Y., refers to a particular radio receiving outfit employing radio frequency amplification and says that he is unable to get any results when his radio frequency amplification is connected. He asks:

Q. 1. Can you give me any help with this set?

A. 1. It is practically impossible to say just what is wrong with your set, unless we are able to see the same, and hear how it works. It may be that your radio frequency amplifying tubes are poor, or that you are supplying too much or too little current to them. Also, your potentiometers may not be adjusted to the best positions.

LIGHTNING DANGER

(182) Baird Fellows, Salisbury, Missouri, says that he is contemplating the erection of a radio station and is going to place his aerial on masts which will be erected on the tops of two buildings about 180 ft. apart. He asks:

Q. 1. Will there be any danger from lightning with the aerial?

A. 1. There is very little danger from lightning if the aerial is properly grounded when not in use.

Q. 2. The masts are to be guyed with galvanized iron wire. Should these guy wires be insulated?

A. 2. The guys should be insulated by inserting strain insulators about every 20 ft.

Q. 3. Will the above mentioned aerial be satisfactory for transmission?

A. 3. The aerial which you mention would be entirely too long for transmission. You should reduce its entire length to about 60 ft. for this work.

EXTENSION PHONES ON A RADIO SET

(183) Mr. Edmond Burke, Kansas City, Mo., wants to know:

Q. 1. How can I connect a pair of phones to my radio set so that the occupants of the house some distance away can listen in on the concerts? My set consists of a detector and a two stage amplifier.

A. 1. By running two wires from your house to your neighbor's, and connecting one end of the pair to your instruments, and a pair of phones to the other end, the radio music may be heard in the other house. If you also wish to listen in at your home at the same time you may connect your receivers in series or in parallel with the two wires, as is found best by trial.

RADIO SET IN A PHONOGRAPH CABINET

(184) Wm. D. Fox, Philadelphia, Penn., refers to the radio set illustrated and described in the June, 1922, issue of SCIENCE AND INVENTION, on page 156, and asks:

Q. 1. Could this set be used in connection with a loud speaker and what type would be best?

A. 1. The set you mention could very well be used with any form of loud talker; this would do away with the need of head phones.

Q. 2. Could this set be incorporated in a phonograph cabinet.

A. 2. Of course, this set could be incorporated in a phonograph cabinet, but since it has quite complicated controls, it would take some space.

Q. 3. Since I have had no experience in radio, I would like to have some informaion as to how to begin.

A. 3. A receiving set of this type is not advisable for the beginner in radio. You should start with a simple crystal or single tube receiver, and gradually enlarge this set as you become more familiar with the workings of the same.

SHIELDING

(185) Carl H. Fastje, Denison, Iowa, says that he has had considerable trouble with his radio receiving set in that whenever he brings his hand near the controls he hears a loud whistle and when he has a station tuned in and removes his hand the signal disappears. He asks:

Q. 1. How can this be eliminated?

A. 1. It is desirable to shield all the instruments of a regenerative receiving set, in order to reduce body capacity, and prevent the circuits from "howling." This may be done by fastening aluminum plates to the back of the panel, directly in the front of the tuning instruments, and connecting the same to a ground such as a water pipe, or to the ground post on the set. Be very careful in installing the instruments that you do not short circuit them on the aluminum plates. Everywhere that a hole is drilled in the panel and through the aluminum plates, the hole in the plate should be made larger than the hole in the panel. In this way any bolts or machine screws passing through the panel will not touch the plates and become short circuited. The rotary plates of variable condensers should be grounded, not the stationary ones.

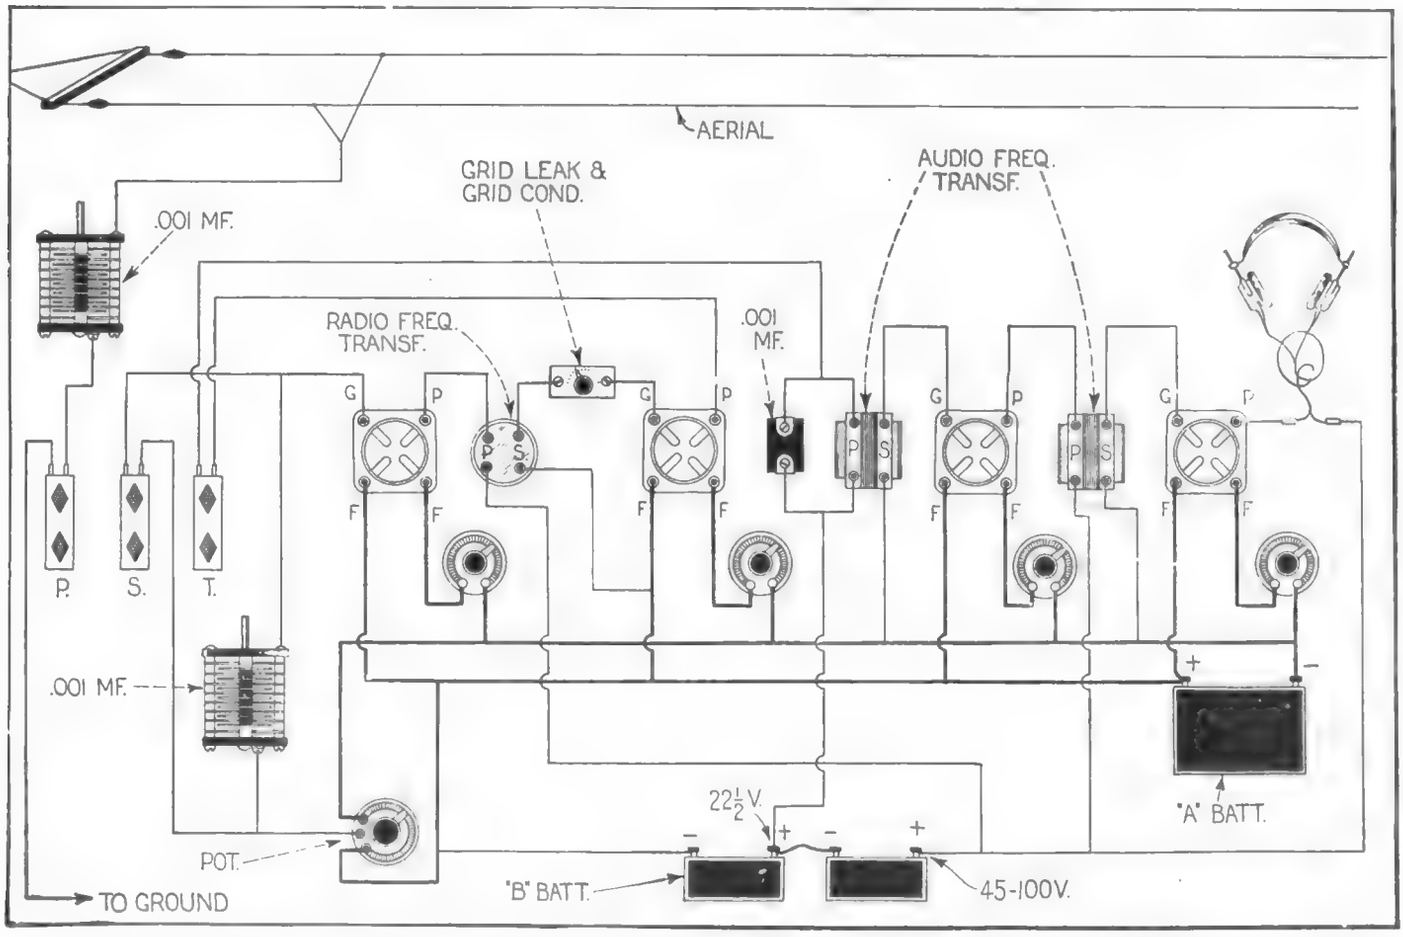

A Long Wave Receiver Employing Honeycomb Coils For Tuning, Using Feed-Back Regeneration Through One Stage of Radio Frequency Amplification With the Addition of Two Stages of A.F. Amplification. The R.F. Transformer Should Respond to the Entire Band of Wave-Lengths.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

LATEST PATENTS

AUTOMOBILE CURTAIN

(No. 1,451,255 issued to Frederick J. Drekmeier.)

A new way of securing automobile curtains to a touring car and likewise of concealing them when not in use is described in this patent



The automobile curtain itself is folded up and when in this folded condition falls down in the vacant space immediately back of the front seat. The fasteners for the curtain are few, although several rods run vertically through it in various places. Of particular interest is the L-shaped rods fastend to each door when the curtain is up. It now becomes possible to open the doors of the touring car without unhooking or otherwise disturbing the curtain protection, inasmuch as a portion of this swings open with the door.

MINIATURE AIRPLANE ATTACHMENT

(No. 1,450,278 issued to Henry Cave.)

As will be readily seen in the illustration, the inventor proposes to attach to the radiator cap of an autombile a miniature airplane. This is held in position by two arms capable of moving freely, but so arranged that the plane is always maintained in a horizontal position. A balance weight is secured to one of these arms to nearly neutralize



the weight of the airplane itself. When the vehicle speeds along, the action of the air on the wings of this airplane will cause it to rise, and the height to which it ascends will be directly proportional to the speed of the machine and also the speed of the wind. The plane will thus be caused to rise and fall to the amusement of the occupants of the machine and those who may be watching it. This position of the plane is shown in dotted lines in our illustration. There is no doubt but that a novelty of this nature will find a very ready market if placed before the public at a reasonable price.

CHECK PROTECTOR

(No. 1,452,674 issued to Albert E. Barnes.)

In the drawing, one will see in the top of the fountain pen cap, differing only from the ordinary cap in that the same is provided with a cutaway portion, a mutilating and inking mechanism. This mechanism, a small wheel, is provided on its surface with sharp projections, which when brought to bear upon the face of a check and moved in contact with it, but under pressure, perforates the check and inks the perforations. The ink is

supplied by means of a felt or ink absorbing roller rotating in a small ink-well. It consequently absorbs the ink from the well and transmits it to the roller. The cap is so arranged that too great a pressure cannot be applied to the mutilating mechanism, assuring the user of perfect results and of a non-smudged check.

LIGHT-CLEANING APPARATUS

(No. 1,455,773 issued to James A. H. Bell.)

In factories where a great amount of dust is found, the electric light bulbs and reflectors are liable to be coated with grime after a short time, and it becomes necessary to employ someone to clean them very frequently; otherwise much of the lighting value of the lamps and reflectors is lost. In this particular device, the inventor employs



a motor securely fastened to each of the reflectors. The motor is operated at intervals, and, when so operated it causes a wiper to pass around the inside of the reflector cleaning it, and likewise removing any dusty accumulations on the lamp bulb. An automatic trip draws both the wiper of the reflector and bulb away from their respective surfaces when the motor stops.

SAFETY PAPER

(No. 1,454,837 issued to Burgess W. Smith.)

This paper is to prevent erasures or alterations on checks, drafts or other valuable instruments. On the paper are the words "void," printed thereon with indelible ink. Upon these words another series of letters or marks are printed in erasable ink, and the paper is then decorated and camouflaged, so as to



obliterate the outlines of the permanent matter. When an attempt is made to alter the check, the hidden words "void" are brought out. This safety paper was described more fully in the August, 1922 issue of this journal, long before the patent was issued.

AERIAL TRANSPORTATION

(No. 1,459,495 issued to George Bennie.)

Transportation by suspended vehicles is not new. In this system a car is suspended from main supporting rail by means of bogeys, and is provided with spring controlled guide wheels or pulleys which engage laterally with the guide rail below the car. As will be seen in the illustration, the vehicle is provided with lifting planes to reduce its weight, the effect of which may be reversed or otherwise adjusted, to enable the craft to be driven in either direction. The cars are likewise fitted with a propeller at either end. When the car has obtained suitable headway, the lifting planes are either manually or automatically adjusted, imparting to the car a tendency to rise and thereby reduce the tension on the supporting springs, and consequently the friction on the supporting members. The bogeys at no time leave the track. When it is desired to stop the craft, either the rear propeller may be operated and the lifting planes turned downward so as to increase the friction of the rollers on the track, or brakes may be used for the same purpose.



SECTIONAL VESSEL

(No. 1,458,134 issued to Paul A. J. M. Constan.)

In an effort to eliminate the disadvantages incident to the towing of vessels in bad weather, the following device has been patented. Essentially it consists of a navigable unit in two parts, each part constituting a separate vessel, but the said two parts are capable of being rigidly connected together, so as to form one single vessel of normal outline, the after section containing engine and propeller drive. The front of this thrust tug is V-shaped like a horizontal wedge, and this portion fits into a corresponding vertical recess in the stern of the forward vessel. At the bottom of the V, a slotted groove will be seen into which the hooking T-shaped tenons pass. When these are in position, a lever causes them to turn, so that they will assume a position at a right-angle with the groove. The bolts are then tightened and the vessels appear as one. Inasmuch as each of the hulls are similarly constructed, three or four hulls may be joined together at one and the same time. When it becomes necessary to separate the vessel into its component sections, water ballast is admitted into the front part of the tug, and the rear part of the hull, to maintain the sections on a level keel.

PISTOL TARGET FINDER

(No. 1,452,651 issued to Charles H. Norrlin.)

As our sketch clearly indicates, this patent is merely a combination of a tubular flashlight and a holder, whereby it may be attached to a regulation revolver or other firearm. It will be noted that clamping members or brackets are secured to the flashlight at either end. Between these two members a long rod is fixed. On this rod a shorter member capable of sliding is found. This is, however, kept in a more or less fixed position by means of a coiled spring at either end of the shorter member. The shorter member likewise is rigidly attached to

the revolver by means of two thumb bolts and a saddle. It is evident therefore, that the recoil of the revolver will not materially effect the flashlight on top, and thus the filament of the bulb there found which would ordinarily be broken after a series of repeated shocks, is quite safe from injury.

MOTOR-DRIVEN MIXER

(No. 1,454,223 issued to Roy W. Poor.)

If this little household utility is placed on the market soon, we feel quite sure that it will meet with a favorable sale. It consists of a small water motor fixed to the top of a cap, which in turn is made to fit a Mason jar. The apparatus is so arranged that a water turbine here formed will rotate a wire egg-beater when it is put into action, due to the water



current acting upon the blades of the turbine. A large opening permits the water to flow out again into the waste. As will be noted in our illustration, a spout leads through the top of the cover to the interior of the jar, and through this spout the ingredients for making mayonnaise and other materials may be poured, and when thoroughly beaten, may be removed without disturbing the motor element.

SCENIC EFFECT FOR SHADOWGRAPHS

(No. 1,451,046 issued to William Maxwell.)

It is well known that if lights of different colors are thrown upon a screen to cover the same surface the lights will combine to form such a color as results from a combination of the colors projected



For instance, if a red light and a blue light are both projected upon the same screen, the resultant combination will give purple, and if yellow and blue lights are used, the illumination will be green. If on the other hand, an object, for instance the hands of a shadowgraph expert, are introduced into the projected rays of one of the elements, the effect will be to cut off, as our illustration shows, the red rays, and the object itself will show its silhouette form in blue, whereas the rest of the screen is purple. If yellow and white lights are used it will be found that the white light is so powerful that it completely absorbs the yellow, but when an object is held in front of the projector transmitting the white rays a yellow image will appear on the screen. By combining colors and changing them, very beautiful effects may be obtained.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

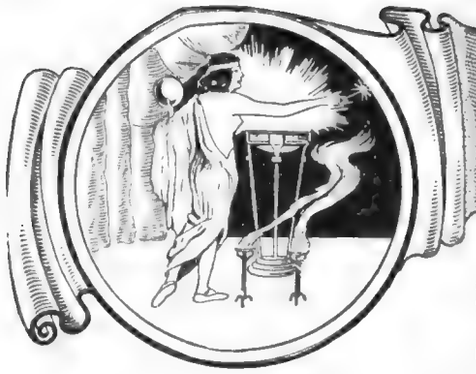

THE ORACLE

The "Oracle" is for the sole benefit of all scientific experimenters. Questions will be answered here for the benefit of all, but only matter of sufficient interest will be published. Rules under which questions will be answered:

1. Only three questions can be submitted to be answered.
2. Only one side of sheet to be written on; matter must be typewritten or else written in ink, no penciled matter considered.
3. Sketches, diagrams, etc., must be on separate sheets. Questions addressed to the department cannot be answered by mail free of charge.
4. If a quick answer is desired by mail, a nominal charge of 25 cents is made for each question. If the questions entail considerable research work or intricate calculations a special rate will be charged. Correspondents will be informed as to the fee before such questions are answered.

TELEPHONE TRANSMITTER QUERIES

(1530) Felix Grandich, New York City, wants to know:

Q. 1. Why is granulated carbon used in a telephone transmitter?

A. 1. Granulated carbon is used in a telephone transmitter, because when the diaphragm is vibrated by the sound waves, the carbon is alternately compressed and released, which changes the resistance of the circuit, and therefore, allows a greater or lesser current to pass through.

Q. 2. Is there any other method of transmitting voice by telephone without using granulated carbon?

A. 2. There are several other types of transmitters in use besides those using granulated carbon. One of the best of these is the carbon ball transmitter, which employs a number of carbon balls, set in depressions in a plate, and on which the diaphragm rests.

BLUING GUN BARRELS

(1531) E. B. Mitchell, Wiggins, Colo., asks the Oracle:

Q. 1. Can you tell me how I can blue shotgun and rifle barrels, and how old barrels can be re-blued?

A. 1. Methods for bluing gun barrels have been published time and again in various departments of this magazine. However, we will repeat a method for this work herewith.

Dissolve 4½ ounces of hyposulphite of sodium in one quart of water. Also dissolve 1¼ ounces of acetate of lead in one quart of water. Mix the two solutions and bring to a boil in a stone pot. After having thoroughly cleaned the barrel, coat with the hot solution using a piece of sponge tied to a stick of wood. When the color develops to the desired extent, wash with water, dry with a piece of flannel, and finish with boiled linseed oil.

ELECTROLYTIC RECTIFIER QUERIES

(1532) E. W. Ludwig, Havana, Cuba, says that he is having considerable trouble with his electrolytic rectifier, as gas is continuously given off from the jars and they become extremely hot in a very short time. He states that he is unable to obtain very pure chemicals and asks us if we can tell him what can possibly be wrong with his apparatus.

A. 1. The only trouble which we can see that can be wrong with your rectifier, is that you may not be using pure chemicals. Since, as you state, it is difficult to obtain these in your city, we would advise that you try anyone of the following solutions, the ingredients of which may be easily obtained:

Saturated solution of sodium phosphate.
Saturated solution of sodium bicarbonate.
10 per cent solution of sulphuric acid.
10 per cent solution of hydrochloric acid.
Saturated solution of table salt.

Any of these solutions may be used to advantage, as they are all tested and will work.

Q. 2. How is the rectifying film on the aluminum electrode to be formed?

A. 2. After setting up the rectifier and connecting it correctly, connect two 100-watt lamps in parallel, the set to be connected in series with the A. C. side of the line. Now short-circuit the D. C. side for about five minutes, and the rectifying film will be formed.

WARM WATER IN A VACUUM

(1533) J. W. Larvin, Pasadena, Texas, says, A claims that if a vessel of warm water be placed in a vacuum the water will freeze. B says that the water will not freeze. He asks:

Q. 1. Who is right?

A. 1. B is right. The water will not freeze. In fact, if a high enough vacuum could be produced, the water will begin to boil, due to its own latent heat and will be chilled, even if not frozen. However, the instant the water started to boil, vapor would be given off and the degree of vacuum lowered, whereupon the water will cease to boil, until such a time as the vacuum were brought to a high enough point again, at which time the same process will be gone through once more.

ELECTRIC PUMP CONTROL

(1534) Roland Holloway, Maryville, Mo., requests:

Q. 1. Can you tell me how I can construct an apparatus which will turn an electric current from one magnetic field to the other on an electric pump, by means of electro-magnets?

A. 1. We gather from your question that you wish to use some sort of a relay arrangement to close two different circuits. We give herewith sketch of a suggestion for a relay of this type.

A and B are magnets placed end to end with a small gap between faces of their poles, and an iron armature, pivoted at one end, C, is placed between the poles. The other end of this armature is free to swing, and to close a circuit with the contacts when pulled to one side or the other.

The wires X and Y are connected to one of the magnetic fields of your electrical pump, and the wires L and M to the other magnetic field. Now, when magnet B is magnetized, it will attract the armature, and close the circuit, XY. When the circuit for magnet B is broken, and the circuit through magnet A is closed, the circuit LM will also close because the armature will swing to the other contact. Not knowing how you desire to control the currents in your magneto, we can only indicate the connections.

The Electric Dog

is one of the most remarkable devices, and moreover, it can be constructed by anyone handy with tools. No wires, no wireless—but it follows you around wherever you go just the same.

This remarkable animal, and how to build it, is described in the September issue of PRACTICAL ELECTRICS.

In September "Practical Electrics"

THERMO-COUPLE PYROMETER By Clyde J. Fitch
CUTTING METALS WITH ELECTRIC ARC By A. M. Candy
ELECTRIC DAMPER REGULATOR By George G. McVicker
TOY MOTORS
SMALL TRANSFORMERS
REPAIRMAN'S TEST PANEL By B. M. Blount
SENDING PICTURES BY WIRE. (Continued from August issue). By Noel Deisch
ELECTROLYTIC RECTIFIERS
MAGNE-TRICKS

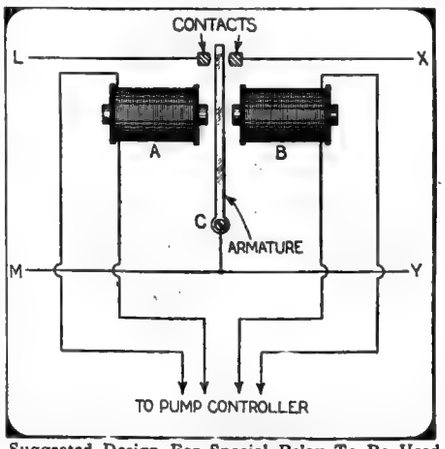

Suggested Design For Special Relay To Be Used In Controlling Electric Pump.

TEAR GAS

(1535) Roy Gravatt, Cheyenne Wells, Colo., asks:

Q. 1. How can tear gas such as used in the late World War be prepared?

A. 1. A very effective tear gas which is chemically known as benzyl bromide, C6 H5 CH2 Br, may be formed by treating boiling toluol with bromine, preferably in sunlight. It may be formed more rapidly if a halogen carrier is present.

GENERATOR QUERY

(1536) J. H. Smith, Moretown, Vt. says that he has a generator which is supposed to deliver 52 volts at 2,800 R. P. M. This generator has no magnetism at all on the poles. He says that the only way he can make this machine generate any current at all is by the use of batteries on the field coils. He asks:

Q. 1. Can you tell me what is the matter with this generator?

A. 1. In all probability, your D. C. generator is of the separate excited field type and it is necessary to use an external battery to excite the field sufficiently to cause generation. In this case, the pole-pieces are of soft iron; it therefore would be impossible to magnetize them permanently.

A UNIVERSAL MOTOR

(1537) Lowell S. Ellis, Warren, Mass., says that he has an electric fan motor which was designed to run on D. C. It is series wound and he wants to know how to change it so that it can run on A. C.

A. 1. Since your motor is series wound, you should be able to connect it directly to the 110-volt alternating current leads and the same will rotate on A. C. as well as D. C. Try this and see whether or not you can get proper results. This motor must be started by hand.

CURRENT CONSUMPTION OF FLASH-LIGHT BULBS AND GRAVITY CELL QUERIES

(1538) H. H. Cowley, Woodstock, Ont., Canada, wants to know:

Q. 1. What is the amperage consumed by a 3.8-volt and 2.8-volt flashlight bulb?

A. 1. The amperage consumed by a 3.8-volt and a 2.8-volt flashlight bulb is very low, generally only about 3-10 ampere or less.

Q. 2. What kind of a cell is best for closed circuit work and how is it made?

A. 2. The best kind of a cell for closed circuit work is the Edison primary battery. This will be very difficult to construct, and attempts at the construction by amateurs have been far from satisfactory. If you use a gravity cell you would get very good results indeed. This consists primarily of a copper finger sector placed in the bottom of the jar. Into the jar a quantity of concentrated copper sulphate solution is then poured, and some copper sulphate crystals thrown into the liquid. These do not dissolve, of course, but remain at the bottom, being used up very slowly, as the age of the battery increases. The jar having been half filled with the aforementioned fluid, a quantity of zinc sulphate, solution is added. A "crowfoot" zinc is then placed in the top of the cell just below the water.

SOUND FILTERS

(1539) A. W. Chambers, Birmingham, Ala., asks:

Q. 1. Is there any device on the market that will filter out one particular sound from a number of sounds which are forced into it?

A. 1. There is no apparatus which would do exactly the work you mention, but there are several which will, out of a number of sounds, reinforce a certain one of them, so that it may be heard above the others. A resonator will do this work as will also a tuned string.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

Einstein's Restricted Theory

By VLADIMIR KARAPETOFF

(*Continued from page* 442)

between the point A and his respective origin (O or O^1), and (b) the instant at which the flash took place. Einstein claims that the two observers will not only record different results, but that this difference cannot be explained on our "common sense" point of view, that is, by figuring out in the usual way their relative positions at the instant of the flash, and knowing the relative velocity q. Einstein's formulae can be graphically interpreted as shown in Fig. 3, and the model in Fig. 1 is based on this interpretation.

THE TWO SET OF AXES FOR THE SAME EVENT

In Fig. 3, OB is a general reference axis (universal bisector), OX is the axis along which the S observer plots his distances and OT is the axis along which he plots his time intervals. The angle XOT is *greater* than 90° by an angle a which depends upon the relative velocity q of the two observers, in a manner explained below. On the model the circular scale on top is directly calibrated in values of q, in per cent of the velocity of light. The S^1 observer plots his distances along OX^1 and his time intervals along OT^1. The angle X^1OT^1 is *less* than 90° by the same amount a.

Let A in Fig. 3 represent the instantaneous flash of light mentioned before and let the S observer find that the flash took place at the distance OC from his origin, and that his clock read time CA, where CA is drawn parallel to OT. Then the S^1 observer will find the distance from his origin to be equal to OC^1 and the time equal to C^1A. The fundamental assumption made in the construction of the model is that *an event represented correctly for one observer is also represented correctly for the other, provided that it is measured in the proper directions of time and distance axes.* The proof of the correctness of the model lies in the fact that the relationships derived from it and represented by algebraic equations check with Einstein's equations. We shall now show the use of the model on a few examples.

SHORTENING OF LENGTHS

Let the S^1 observer mark a length x^1 in his system, parallel to the direction of the relative motion and let S be asked to measure this length while the two observers are in relative motion. To S^1 the "event" is represented by two parallel lines, OT^1 and AD (Fig. 4), the distance OC being equal to x^1. By the fundamental assumption, the same two parallel lines represent this event correctly for S, who, however, measures his distances along OA, and thus finds a length x smaller than x^1. This apparent shortening of a moving length is known in physics as the Fitzgerald contraction, and its magnitude depends upon the relative velocity q of the two observers. In Fig. 4 this contraction depends on the angle a which in turn depends upon q. The value of the ratio of x to x^1 comes out from the model exactly as predicted by the theory.

THE CLOCK OF A MOVING OBSERVER SEEMS TO RUN SLOW

Let the S^1 observer have a clock at his origin O^1 (Fig. 2) and let him be instructed to give a signal after his clock ran, say for an interval of time t^1 from the instant at which O and O^1 were in coincidence. For S^1 the event is represented by the point E (Fig. 4), where $OE = t^1$ is the agreed interval of time. In order to find out what time S will read at the instant of the signal, we draw EF parallel to OX. Then $OF = t$ is the interval of time measured by S, and FE is the distance between O and O^1, Fig. 2, at that instant. We see that t is greater than t^1; hence we conclude that S will claim that the S^1 clock was slow. Again the ratio of t^1 to t comes out from the model exactly equal to the value predicted by Einstein.

VELOCITY MEASUREMENT

Let a small body A, say a bullet or an electron, move at a uniform velocity along XX^1 (Fig. 2) and let each observer be asked to measure this velocity relatively to his own system. The event itself is represented in Fig. 5 by the straight line OH. For such a line both observers will find that the distance covered is proportional to the time elapsed, so that they will agree that the material point A is moving at a uniform speed. By definition of velocity, it is equal to the distance covered in unit time. Hence, if we lay off OF equal to unit time, and draw FD parallel to OX, the point of intersection, C, will determine the length $FC = v$, which is the velocity as measured by S. In accordance with our agreement regarding units, v is expressed as a fraction of the velocity of light.

To find the value of the velocity v^1 of the point A, as measured by the S^1 observer, we repeat the same construction for his axes, that is, we lay off $OF^1 = 1$ and draw F^1D^1 parallel to OX^1. F^1C^1 is then equal to v^1.

Let OH be turned by a small angle clockwise. This means a point for which both observers will measure higher velocities. Finally, when OH coincides with OB, the velocity measured by S will be $FD = 1$ and that measured by S^1 will be $F^1D^1 = 1$. It will thus be seen that the universal bisector OB represents a point moving at the velocity of light with respect to both observers. In other words, *Einstein's postulate of relativity, viz., that the velocity of light is the same for all observers, follows directly from the arrangement of the axes in the model, and need not be a separate assumption.*

THE ANGLE BETWEEN THE AXES

We can now readily see what value the angle a between the axes must have. To the S observer, the S^1 system is moving at the velocity q, while to S^1 himself he is stationary. Hence, to S^1 the axis OT^1 represents his own stationary position, independent of time, while to S this axis represents a point moving at the velocity q. By laying off $FG = q$ from point F, we find the position of the axis T^1. This determines a the angle a for a given q. But to S^1 the observer S is moving at the same velocity q in the negative direction. By laying off $F^1G^1 = q$ on the extension of D^1F^1, we find the position of OT^1 if OT^1 is given. From the geometry of the figure, these two relations can exist simultaneously only if one set of axes, say TOX, comprises the angle $90° + a$, while the axes T^1OX^1 are drawn at an angle $90° - a$. The triangle OGF has a right angle at G, so that the value of a can be readily obtained for a desired q, or vice versa. Those familiar with trigonometry will see at once that $\sin a = q$, where q must be expressed as a fraction of the velocity of light. The circular scale shown in Fig. 1 is marked directly in per cent of velocity of light using the above relationship between q and a.

DETAILS OF THE MODEL

The model (Fig. 1) is made of sticks of wood, 2.5 cm. by 0.5 cm., and the four axes are about 100 cm. long measured from O. The bars OT and OX^1 are permanently fastened at right angles to each other, and so are the bars OT^1 and OX. The bars OT and OX extend to the left and with two other short bars form a rhombus The bisector OB is made of steel bar 1.5 cm. by 0.5 cm. and is 100 cm. long, measured from O. It also extends to the left of O and serves as a guide for the rhombus. The rhombus is provided with a slider and a set screw at the extreme left, and in this way the two sets of axes can be fastened at any desired angle a (or speed q) to each other. The speed scales (DF and D^1F^1 in Fig. 5) are also shown in Fig. 1. They are provided which saddle sliders at D and D^1 and are pivoted at F and F^1. The holder and some other sticks shown on the bisector to the right serve for various experiments that can be performed with the model.

Speed

By HAROLD F. RICHARDS, Ph.D.

(*Continued from page* 451)

New York, and found to function with great precision. Five hydrophones for receiving sound waves under water are located at known distances from a central recording station on the shore, and a 1-pound bomb of TNT is detonated electrically at a known distance from the shore. The same pulse of electricity which serves to detonate the bomb also causes a radio transmitter to send out a radio signal, and since radio travels fast enough to go seven times around the world in a second, the times required for the radio signal to reach the shore, a distance of perhaps 10 miles, may be neglected in comparison with the time required for the sound to reach the [illegible] hydrophones under water. The [illegible] radio signal is recorded photographically on a moving film, which is calibrated to the thousandth part of a second, and subsequently, when the various hydrophones receive the sound impulse, they also produce, in succession, records on the moving film. Thus a single photographic record indicates the times required for the sound to travel from the bomb to each of the hydrophones. The arrival of the sound pressure-wave at a hydrophone induces an electric surge in the string galvanometer wire. Meanwhile, a beam of light from an electric arc is producing on the moving film a continuous record of the position of the string, and so a sudden deflection of the string introduces a corresponding nick in the photographic record. Furthermore, the beam of light is regularly being interrupted by the spokes of a wheel, rotated at constant speed by a tuning fork controlled motor; every time a spoke interrupts the beam of light a photograph of the spoke is produced, in the form of a fine transverse line, on the moving film. In the apparatus described, the interruptions occur every 0.01 second, and the distance on the film corresponding to this interval is 1.1 millimeters, which can later be measured to the tenth part. Thus the film, when developed, is found to be ruled with lines by which time can be measured to 0.001 second, and it is a simple matter to determine the times required for the sound to reach the different hydrophones. From this data, together with the known distances of the hydrophones from the bomb, the speed of sound in water (about 4,700 ft. per sec.) is easily calculated.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

Radio Catalogue Free—

Write us a post card—

and we will send you free this 52 page catalogue of radio sets and parts. It also contains explanation of radio terms, map and list of broadcasting stations and much radio information, including an explanation of successful hook-ups and circuits.

You will be amazed at the low prices Ward's quote. A complete set for $32.50 equalling sets at $60 elsewhere—a $23.50 set that under favorable conditions has a radius of 500 miles and more.

This catalogue contains everything for the expert and amateur. Complete sets and every improved part for building sets, all the most up-to-date devices—at the lowest possible prices.

Headquarters for Radio

Montgomery Ward & Co. is headquarters for Radio, selling everything direct by mail without the usual "Radio-profits." Why pay higher prices? Ward quality is the best and the prices will often save you one-third. Everything sold under our Fifty Year Old Guarantee,—Your Money Back if You Are Not Satisfied. Write today for your copy of this complete 52-page Radio Book.

Write to the house nearest you. Address Dept. 40-R

Chicago Kansas City St. Paul Portland, Ore. Fort Worth

Montgomery Ward & Co.

The Oldest Mail Order House is Today the Most Progressive

Digitized by Google

Original from UNIVERSITY OF CHICAGO

Here's The Winner of The $5000 Cup

Gentlemen—meet Mr. Otto Loesche, winner of the $5000 Penrose Trophy in the annual Pike's Peak Automobile Race in 1920 and first in his class in 1921.

Mr. Loesche is not only a champion automobile racer, but he's chief of the experimental department of the Lexington Motor Company. That's a pretty good job for a young man.

Recently, when asked for a statement concerning the one thing that had contributed most to his success, he said:

"I believe the greatest source of assistance and encouragement came to me when I became interested in trying to better my position. I wanted an education—that is, a foundation on which to build. So I enrolled as a student in the Mechanical Engineering Department of the International Correspondence Schools, of Scranton, Pa., and began to study. There is no question in my mind but that was the most important step of my life."

Why don't you at least find out what the I. C. S. can do for you? It doesn't cost you a penny or obligate you in any way to mark and mail the coupon printed below, but that seemingly simple little act may be "the most important step" in your life, too.

Today—not "Tomorrow"—is the day to make the first definite move toward Success.

INTERNATIONAL CORRESPONDENCE SCHOOLS
Box 6205-C, Scranton, Penna.

Without cost or obligation on my part, please tell me how I can qualify for the position or in the subject *before* which I have marked an X:

BUSINESS TRAINING COURSES

☐ Business Management	☐ Salesmanship
☐ Industrial Management	☐ Advertising
☐ Personnel Organization	☐ Better Letters
☐ Traffic Management	☐ Foreign Trade
☐ Business Law	☐ Stenography and Typing
☐ Banking and Banking Law	☐ Business English
☐ Accountancy (including C.P.A.)	☐ Civil Service
☐ Nicholson Cost Accounting	☐ Railway Mail Clerk
☐ Bookkeeping	☐ Common School Subjects
☐ Private Secretary	☐ High School Subjects
☐ Business Spanish ☐ French	☐ Illustrating

TECHNICAL AND INDUSTRIAL COURSES

☐ Electrical Engineering	☐ Architect
☐ Electric Lighting	☐ Blue Print Reading
☐ Mechanical Engineer	☐ Contractor and Builder
☐ Mechanical Draftsman	☐ Architectural Draftsman
☐ Machine Shop Practice	☐ Concrete Builder
☐ Railroad Positions	☐ Structural Engineer
☐ Gas Engine Operating	☐ Chemistry ☐ Pharmacy
☐ Civil Engineer	☐ Automobile Work
☐ Surveying and Mapping	☐ Airplane Engines
☐ Metallurgy ☐ Mining	☐ Agriculture and Poultry
☐ Steam Engineering ☐ Radio	☐ Mathematics

Name .....
Street Address 3-27-23
City ..... State .....
Occupation .....
Persons residing in Canada should send this coupon to the International Correspondence Schools Canadian, Limited, Montreal, Canada.

SEND NO MONEY FOR THESE AUTOMATICS

Military Model Automatic

A Man's Gun, 32 Cal., 20-Shot, with Extra Magazine Free $9.95

25 Cal. 6-shot Blue Steel $6.25
25 Cal. 8-shot Mauser $11.95
32 Cal. Mauser $12.95
30 Cal. 9-shot Luger $16.25
32 Cal. 6-shot Hand Ejector, Swing Out Cylinder $15.95
38 Cal., Hand Ejector ... $17.95
Hook-Open Revolver .....
Hook-Open Revolver $8.95

New Guns Use Standard Ammunition
Action Guaranteed or Money Back.
Postman Our Price, Plus Postage.

S IMPORT TRADING CORP.
Dept. 949, New York

The Planet Mars

By PROF. WILLIAM H. PICKERING

(*Continued from page 432*)

MARS' TEMPERATURE LOWER THAN OURS

Where the snow is melting the temperature is necessarily 32° Fahrenheit. In general, the mean temperature of the planet is probably about 20° lower than that of our Earth, but the polar regions are warmer than ours during their long summer season. The extremes of temperature are much greater than with us, and frost occasionally forms, even in the daytime, on the equator. Clouds are a frequent phenomenon, especially at sunrise and sunset. They often conceal large areas of the surface near the melting polar caps. During the latter part of the Martian August, and through September, snow storms are of frequent occurrence near the north pole, and the deposited snow is readily seen through the telescope.

WHAT ARE THE "CANALS" OF MARS?

In 1892, the canals in the dark regions were discovered, and it was shown that the supposed canals crossed the supposed seas, it became at once evident either that the canals were not real water canals, or else that the seas were not real seas.

It was then decided that a suggestion made in 1888, that both were due to vegetation, was more probable, and this may be described as until recently the practically universal opinion among planetary observers. On the other hand, the idea that this vegetation is supported by invisible central irrigating pipes or ditches, and the later suggestion that the flow in these ditches is maintained by a gigantic artificial pumping installation, while still popular with a certain section of the general public, have now by the overwhelming majority of the practical observers of the planet both been consigned to the scrap heap.

Investigators now believed that since these regions evidently change color with the seasons, that they may perhaps be arid, but certainly cannot be described as permanent deserts. A suggestion has recently been made that the broader and fairly permanent canals mark the curved courses of nocturnal rain showers. Unlike the maria, they never appear green. It is shown that on Mars any such heavy precipitation would almost certainly occur at night, when the planet's atmosphere would experience a very striking fall of temperature, much more marked than ever occurs upon our Earth. These canals are moreover curved in the right direction as determined by theory, and indicate by their radius of curvature wind velocities differing but little from those that are often observed in our own upper atmosphere. It is as yet too early to say how well this explanation will withstand the assaults of time, but we may say that at least it seems promising.

The shorter narrow canals, which always appear rather late in the season, may perhaps also be explained that way. We have not yet found out just what is their cause. Of course, they may be artificial. There is no reason why the assumed Martians should not plant their crops, or shrubs, wherever they choose. They may have a special fancy for a linear distribution, but the chances are that there is some definite natural reason for it, probably associated with dense nocturnal fogs, and the arrangement of the hills and valleys. We have found canal-like markings quite as artificial looking upon the Moon.

MOON HAS CANAL MARKINGS ALSO

Mars, in fact in numerous respects, presents a much greater analogy to our Moon than it does to the Earth. Both Mars and the Moon possess canals, which differ from one another mainly in size, rather than in appearance, the lunar canals being very much smaller. Oddly enough, both are found to shift across the surfaces of their respective planets, and in general towards the Sun. Several of the Martian canals shift as much as 150 miles, the lunar ones being smaller shift much less, only two or three miles. It was hoped at first that a study of the lunar canals would help us to understand the Martian ones, but it only appears to deepen our uncertainty. It seems improbable that a lunar canal should be due to meteorological causes, but a traveling variety of vegetation on either planet seems still more unlikely.

DOUBTFUL THAT MARS IS INHABITED

If our own Earth were viewed from the same distance that we view Mars, never less than 35,000,000 miles, it is certain that we should not be able to detect the slightest evidence of civilization upon its surface, nothing but the constant changes induced by the action of the gigantic forces of nature—the melting of the snow, and the advance of vegetation with the progress of the seasons. Man's puny efforts could nowhere be seen. There is no evidence that the Martians, if they exist, are more advanced than ourselves They may be much less so—perhaps they are only brutes or insects. Indeed, the only reasons ever advanced for assuming their superiority is the now discarded pumping theory, with the associated idea that the canals were laid out in straight lines, and with the belief that their planet is perhaps older than ours The last really might be a good reason, if Mars were like the Earth, but we know that it is not. It may be that it is better adapted to the development of an advanced civilization, or it may be that it is less so. We should not expect to find any advanced civilization upon the Moon even if we waited a hundred thousand years for it. It is pleasant to dream of the Martians as being far more advanced in knowledge than ourselves, and there is no harm in our doing so, so long as we are ready at all times to admit that the idea has not the slightest foundation, either for or against it, in fact as far as known.

Experimental Electro-Chemistry

(*Continued from page 458*)

success can be had with some grades of denatured *grain* alcohol. A nickel gauze electrode should be used, although sheet nickel can be used. This forms the cathode. A porous pot or cylinder containing a cold saturated solution of sodium carbonate with an electrode of lead serves as the anode. The porous pot is inserted into the jar or beaker. This serves as a permeable membrane to separate the two electrolytes. Keep the whole cell well cooled and pass a current of about 6 amperes through the cell for 3 hours and then cut the current strength down to about 2 amperes for another hour. Replace alcohol which is lost by evaporation.

The large red crystals of azobenzene should then be collected and preserved. They are rather impure.

An ingenious device now having a wide sale is illustrated in Fig. 4. It consists of two electrodes fitted in a handle. The electrodes are an alloy of aluminum, containing about 97 per cent aluminum, the other constituents being silicon or magnesium or both. When the electrodes are connected to the 110-volt mains and thrust into a liquid, aluminum hydroxide forms about the electrodes and is thrown off.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

Motor Car Leaps, Loops and Skids

By HAROLD F. RICHARDS, Ph.D

(*Continued from page* 454)

however, not so simply explained. There is great doubt as to whether the blow-out furnishes a legitimate excuse for accidents, many drivers reporting that a blow-out had not appreciably increased the difficulty of steering; and I remember one driver who, after losing an entire rear wheel, held the road easily for thirty yards, with the end of the axle dragging on the ground. We may, however, note the following effects of a sudden blow-out.

(1) The axle is inclined towards the side blown-out, producing a cone-effect which causes the car to turn in the direction of the blow-out. This, of course, is due to the sudden deflation of the tire.

(2) There is a slightly greater pressure on the blown-out tire than on its mate, due to the inclination of the axle, which tends to produce a slightly greater traction on the side where the blow-out occurs, resulting in a twist of the car. This effect is small.

(3) Due to the collapse of the tire, the wheel affected gives the road a sudden push, of its own account, entirely independent of the motor. This effect is produced by the sudden concentration of the mass of the tire closer to the rim, which decreases the moment of inertia of the wheel. The angular momentum of the wheel tends to remain constant, however, and since the moment of inertia of the wheel has become less, the wheel tends to speed up, acting like a flywheel and thus pushing the car unsymmetrically. The principle is exactly the same as that involved when a weight fastened to a string is swung around in such a manner that the string winds up on the finger. As the weight approaches the finger, due to the shortening of the string, it goes faster and faster. Just how important this effect is, in relation to the other results of a blow-out, can hardly be determined without performing exact experiments, and it appears that such experiments have not yet been carried out.

It may be said, in conclusion, that the cone-effect, due to the sudden inclination of the axle, which, of course, is not corrected for by the differential is probably the greatest factor in causing loss of control when a tire blows out, and that the flywheel action of the affected wheel comes second in importance. The explosive action, in spite of the sound of it, is not a factor; the air simply leaves and the wheel drops. The experience of many motorists suggests that a blow-out, with its accompanying surprise and wrench of the steering wheel, is seldom a sufficient cause to account for complete loss of control.

Spectroscopes—How to Build Them

By C. E. BARNS

(*Continued from page* 444)

potassium, etc.—a small particle of the substance experimented upon is held in the flame by a short length of platinum wire with pincers. The bright lines of these various substances will instantly be visible.

A PORTABLE HAND-SPECTROSCOPE

A most beautiful and serviceable hand-

If He Had Passed It Up

He would still be a laborer at $2.00 a day. No money, nothing ahead but hard work, longer hours—and regrets.

But He Didn't Pass It Up. He decided to learn MECHANICAL DRAWING. He buckled down to work with the Columbia School of Drafting. When he had a quiet half hour to spend he spent it—as a wise man spends money—to get full returns.

Made $275 Extra in 3 Days. He recently received $275 for one drawing that only took him three days to draw.

Now How About You? Are you working up hill or down? Count the money in your pay envelope next pay day. You'll find the answer there.

Make $35 to $100.00 a Week. We will train you to be an expert draftsman in your spare time at home by mail. There's lots of room for you if you act now.

Promotion is Quick. WE'LL QUALIFY YOU for a high-salaried position in the drafting field and keep you in touch with openings for draftsmen in the big machine shops, industrial plants and United States Government departments. Men who start as draftsmen are often advanced to Chief Draftsman, Chief Engineer, Production Manager and so on.

Get the *Right* Training. Mr. Claflin, the founder and director, stands personally in back of the Columbia School of Drafting. You spend no time in long-winded theories—useless and expensive to you. You start on actual drawing work the day you receive your first lesson.

You Need No Previous Training. The course is easy to understand and easy to follow. Many students are qualified even before they complete the course.

Success Calls Men of Action Only. If you are a man of action clip the coupon now and show that you are a man of action. Keep right on top of this opportunity to make real money. Don't go looking for a pair of scissors. Tear the coupon off and mail it right now. We have a special offer for those who reply promptly. Get started now.

What You Get FREE

Practical Problems. You are carefully coached in practical drafting work.

We Help You Get a Job. We help you get a position as a practical draftsman as soon as you are qualified.

Free Training as a Drafting Specialist. After completing the course in mechanical drawing we'll train you free in your choice of one of our special elective courses.

Draftsman's Equipment. We give you Free a full set of drafting equipment as shown in the picture below.

Consultation Privileges. You are free to write us any time for advice and suggestions regarding your success.

Diploma. The diploma we give you on completing the course attests to your proficiency as a draftsman. It is an "entering wedge" to success.

Free Subscription to Draftsman's Publication "The Compass"

U. S. Civil Service Commission Calls for Draftsmen

A few of many positions constantly open in Government departments.

Salaries are starting salaries, subject to increase. Practically all of them carry a bonus of $240 a year additional.

ARCHITECTURAL DESIGNER—$4,000.

CHIEF DRAFTSMAN (Aeronautical) — Naval Aircraft Factory, $15.04 per day.

AERONAUTICAL DRAFTSMAN—Field Service of Navy Department, $5.20 per day to $12.00 per day.

Free Book Send in this coupon today. Immediately on receiving it we'll send you our book, "Drafting — Your Success." It tells you all about our new method of teaching mechanical drawing and gives full details of our offer.

COLUMBIA SCHOOL OF DRAFTING

ROY C. CLAFLIN, *Pres.*

Dept. 2121, 14th & T Sts. **Washington, D. C.**

FREE Drafting Outfit

We give you free with your course this professional drawing outfit. It's yours to keep.



FREE BOOK COUPON

COLUMBIA SCHOOL OF DRAFTING
Dept. 2121, Washington, D. C.

Enter my name for a subscription to "The Compass" and without obligation to me, please send me your illustrated book on Drafting, telling how I can secure your complete home study course and your help in securing a position as Draftsman.

Name ..... Age .....

Address .....

City ..... State .....

Digitized by Google Original from UNIVERSITY OF CHICAGO

$1,000 REWARD!

IN a dirty, forlorn shack by the river's edge they found the mutilated body of Genevieve Martin. Her pretty face was swollen and distorted. Marks on the slender throat showed that she had been brutally choked to death. Who had committed this ghastly crime? No one had seen the girl and her assailant enter the cottage, no one had seen the murderer depart. How could he be brought to justice?

Crimes like this are being solved every day by Finger Print Experts.

Earn $2500 to $10000 a Year

Within the past few years, scores of men—men with no police experience, men with just ordinary grade school educations—have become finger print experts. You can become a finger print expert, too. Can you imagine a more fascinating line of work than this? More trained men are needed. Here's your real opportunity. You can learn the science of Finger Print Identification—right at home in your spare time.

Free Course in Secret Service

For a limited time, we are making a special offer of a ***Professional Finger Print Outfit*** absolutely free and FREE course in secret service intelligence. Mastery of these kindred professions will open a brilliant career for you. This coupon will bring you FREE book and details of this great offer. Don't wait until this offer has expired. Fill in the coupon now. Mail it today.

University of Applied Science
Dept. 53-36, 1920 Sunnyside Ave., Chicago, Ill.

Gentlemen:—Without any obligation whatever, send me your new, fully illustrated, FREE book on Finger Prints and your offer of a FREE course in Secret Service Intelligence and the Free Professional Finger Print Outfit.

Name _____

Address _____

City & State _____ *Age* _____

BE A REAL MAN

LOOK LIKE ONE AND FEEL LIKE ONE

Broaden your shoulders, deepen your chest, enlarge your arms and get a development that will attract attention. Fill yourself full of energy and be powerful

My New Book
"Muscular Development"
Will Explain How

This book is illustrated with 20 full page photographs of myself and of some of the world's finest developed athletes I have trained. It will interest and benefit you greatly.

(*stamps or coin*)
Do it NOW, *today*.
Keep *in your mind*.

CHARLES ATLAS, Dept. 209, 305 Broadway
NEW YORK CITY

spectroscope, suitable alike for laboratory experiment and for the observatory in connection with a telescope (as well as forecasting the weather with amazing accuracy) is what is known as the Amici type, containing three, or, better still, five prisms in combination: three crown and two flint. The series may be purchased—prisms of one-inch base, cemented together in proper form—for twelve dollars or thereabouts; but the blank prisms of borosilicate crown and dense flint may be had for a third of that sum, and the grinding of the prisms to form can be undertaken by the novice possessed of the necessary lens-grinding tools.

A grinding tool with a plane surface screwed to the end of the vertical shaft moved by the worm-screw is the main implement for getting the prism to true form and also for polishing. A vernier caliper and a goniometer for measuring angles with great accuracy are quite essential during the grinding process so that all prisms of the series will fit together. These are afterwards cemented together with Canada balsam and blackened with vegetable black and lacquer. When the fine-emery work is complete, the surfaces are polished on a disc of hard cartridge paper affixed to the revolving tool with thin photographer's paste and ironed down smooth, dry jeweller's rouge, oxide of iron or putty powder being used as the polishing agent. A wax-pad, as used in lens-polishing, will not do, as it tends to turn the edges.

ADVANTAGES OF THE AMICI PRISM

The advantage of the Amici series is that the spectral image widens with each prism traversed; and being set in alternate units, the emergent beam is on a line with the incident ray, and there is no turning of telescope and collimator to reciprocal angles in order to pick up the spectrum. In other words, the entire system, from eyehole to slit, is in a straight line. The whole instrument, as compact as a field-glass when closed up for the pocket or traveling-bag, is very powerful. Indeed, one of the chief advantages of this portable spectroscope is that it may be slipped on to the inner tubes of the eyepiece system of a refractor for stellar observation. In this case the objective serves as a collimating lens; and as a star is only a point of light anyway, the slit-cap is also removed from the spectroscope, the elongated image of the star serving the purpose of the slit. True, carrying the star-image through a slit increases its definition and makes clearer the spectral lines—or, rather, dots—distributed along the thin brilliant line of many colors, often twice or three times the entire breadth of field, but a star-spectrum is very difficult to pick up through a slit; and without a driving-clock, harder still to hold.

The difference between the spectrum of the sky on a bright clear day and one in which the heavens are slightly overcast is very marked. The bright telluric lines of vapor, even in currents at very great heights, are soon discerned by those skilled in the use of this little instrument. The darkening, paralleling and obscuring as with a haze of the otherwise sharp hard dark "D"-line of sodium in the solar spectrum is itself an almost infallible criterion.

Popular Astronomy

By ISABEL M. LEWIS, M.A.

(*Continued from page* 431)

tory of Carleton College, Northfield, Minn. will also locate here to photograph the corona and star-field surrounding the sun with an 8-inch lens, and to obtain photograph of the flash spectrum.

WHERE PARTIAL ECLIPSE WILL BE VISIBLE

In all sections of the United States outside of the path of total eclipse the sun will be *partially eclipsed*, in fact, the partial phase of the eclipse will be visible over all of North America and the northern part of South America. The maximum obscuration at any point will depend upon the distance of the place from the central line, the size of the eclipse decreasing as the distance from the central line increases. The moon's shadow will first strike the earth at sunrise a little to the southwest of Kamchatka in Asia. From this point the path of total eclipse, which is a little under one hundred miles in width, will cross the Pacific Ocean in a southeasterly direction, grazing the Aleutian Islands, but passing over no land in its course until it arrives at the Santa Barbara group of islands off the coast of California shortly after local noon. The shadow of the moon sweeps over this part of its course in about an hour and a quarter with the tremendous speed of approximately half a mile in a second. After touching the coast of Southern California the shadow passes over Lower California, Mexico and the Gulf of Mexico to Yucatan, and thence south of the West Indies to a point near the Lesser Antilles, where it leaves the earth at sunset. About one hour and forty-five minutes are required for its journey from the western coast of Lower California to the point where it leaves the earth. The entire extent of its path from Kamchatka to a point in the Atlantic near the Lesser Antilles, a distance of over five thousand miles, is covered in three hours. As it sweeps past the Aleutian Islands it is early in the morning, local time; it is about 1 o'clock, Pacific Time, when it reaches San Diego and Ensenada; 2:15 p. m., Mountain Time, when it comes to Hermosillo, and 2:35 p. m. when it passes Cuencame. At 3:28 p. m., Central Time, it reaches Tampico on the Gulf of Mexico, and as the sun is setting it passes off of the earth in the vicinity of the Lesser Antilles.

As the Alaskan peninsula, the western and southern parts of the United States and the West Indies lie comparatively near to the path of total eclipse, the partial eclipse will be largest in these sections as well as in all parts of Mexico and Central America. In the New England States the maximum obscuration will be about 40 per cent and in eastern Canada it will be even less.

CAUSE OF TOTAL SOLAR ECLIPSE

It is probably known to everyone that a total eclipse of the sun is due to the passing of the moon directly between the sun and the earth. It is not so generally known that eclipses can *only* occur when the moon is at, or very close to, the nodes of its orbit which are the two points 180° apart where it crosses the ecliptic or plane of the earth's orbit around the sun. The moon passes through each node of its orbit once every month, but eclipses will not occur unless the earth, sun and moon are in line when the moon is at or near one of its nodes. This is bound to occur twice a year at intervals of six months, when the sun is near the nodes of the moon's orbit and the times when eclipses both of sun or moon are liable to occur are spoken of as the *eclipse seasons*. That eclipses do not occur in the same months each year is due to the fact that the positions of the nodes of the moon's orbit are slowly shifting at a rate which causes them to complete one revolution around the

(*Continued on page* 489)

Digitized by Google
Original from UNIVERSITY OF CHICAGO

UILD YOUR SET WITH BARAWIK STANDARD RADIO GOODS

WE PAY TRANSPORTATION CHARGES EAST OF THE ROCKIES

THE PRICES QUOTED DELIVER THE GOODS TO YOUR DOOR

FAST SERVICE—TRY US AND BE CONVINCED

THIS GUARANTEE PROTECTS YOU—Examine the goods we ship you. They must suit you in every respect.. If you are not satisfied with your purchase return the goods at once and we will refund the price you paid.

ATE CIRCUIT "B" BATTERIES

an make real savings ese batteries. Don't more. We guarantee to equal any on the et regardless of price. utely uniform. Extra life.

Signal Corps type, size. 18 cells, 22½ volts. Each....95c

Variable Large Navy size, 6½x4x3 inches , giving range from 16½ to 23¾ volts in ix steps. Each.....$1.80

Combination Tapped 45 volts, 30 cell, battery. Tapped to give 45, 22½, 21, 18 and 16½ volts. Handles both de- and amplifier tubes. Each.....$3.55

HOMECHARGER TERY CHARGING RECTIFIER

Charge your battery at home over night for a few cents. Simply connect to any 110 volt 60 cycle light socket, turn on current and rectifier does the rest automatically. Will work for years without attention. Simple connections. Gives a tapering charge which batteries should have. You can make it pay a profit charging your friends' auto batteries. Long connecting cords with pair of battery clips.

Prices are Transportation Paid.

For 6 volt battery $12.95
For 12 volt battery 12.95

STORAGE "A" BATTERY

High grade battery made especially dio service. Guaranteed for three years. ly cared for will many more years rvice for filament g. Made of best materials. Full ge. The best battery on the market. ns of these batteries your set for 10 If at the end of time you are not satisfied with the battery return it and it refund the purchase price.



6 volt, 40 ampere size. Each....$10.00
6 volt, 80 ampere size. Each.... 12.50

VACUUM TUBES

rd Brands—Cunningham Re- . Every one guaranteed ed perfect. We will ship in stock unless you specify ice.

detector, UV200 C300 Ea.$4.30
mplifier, UV201A C301A 5.95
5 Watt Transmitter..... 7.70
VD11 1½ v. Fil. Each.....$5.95
VD12. Each..... 5.95
V199. Each..... 5.95
V199 Socket..... 49c
V199 Adapter..... 49c
VD11 Socket. Each..... 49c
VD11 Adapter. Each..... 48c

MENT CONTROL RHEOSTATS

Best grade. High heat resisting base. Diam. 2⅜ in. cap 1⅛ amp. Resist. 6 ohms, 1¼ in. knob with pointer. 75c value.
L132 Each 45c

25 Ohm Rheostat for 301A 201A 89c

POTENTIOMETER

tyle as above rheostat. Gives fine "B" adjustment. Resistance 200 or 400 ohms. Each 89c

NIER RHEOSTAT

exceedingly fine control battery current. A ne- for best receiving results. Each 89c



ACUUM TUBE SOCKETS

Our Special Socket. A wonderful value. Moulded entirely of brown bakelite. Four binding post connections. Right angled contact springs.
L140 Each 39c

High Grade combination type for panel or table mounting. Metal tube. High insulation base. One of the best sockets made.
L148 Each 45c

AND THREE GANG SOCKETS

e sockets easy to d detector amplifier nd make compact ilke job. aterials.



Perfectly made of high Quickly mounted on panel

wo-gang socket $1.05
hree-gang socket 1.45

GALENA DETECTOR

Easy fine adjustment. Crystal mounted in cup. Moulded base and knob. Brass parts polished nickel finish. An unequaled value.
L732 Each 59c

TECTOR CRYSTALS CAREFULLY TESTED

alena, Arlington tested, per piece. 19c
ilicon, Arlington tested, per piece. 19c
ested, Galena, per piece..... 9c
ested, Silicon, per piece..... 9c

"HONEYCOMB" COILS

Carefully made—fine looking coils. Highest efficiency. Low distributed capacity effect, low resistance—high self inductance. Very firm impregnation. Range given is in meters when varied with .001 variable condenser. Mounted coils have standard plug mountings.

Turns	Range	Art No.	Net Mntd.	Art No.	Price Mntd.
25	120- 250	L301	$0.39	L320	$0.89
35	175- 450	L302	.42	L322	.96
50	240- 720	L303	.49	L323	1.04
75	380- 910	L304	.54	L324	1.08
100	500- 1450	L305	.58	L325	1.13
150	800- 2000	L306	.63	L326	1.17
200	900- 2500	L307	.72	L327	1.26
250	1300- 3500	L308	.78	L328	1.35
300	1500- 4500	L309	.82	L329	1.38
400	2000- 5000	L310	.87	L330	1.57
500	2800- 6100	L311	1.12	L331	1.63
600	4000-10000	L312	1.27	L332	1.78
750	5000-12000	L313	1.43	L333	1.93
1000	7900-15000	L314	1.70	L334	2.28
1250	9750-19500	L315	1.92	L335	2.49
1500	14500-26500	L316	2.18	L336	2.65

COIL MOUNTINGS

L340 Three-coil mounting $3.95
L341 Two-coil mounting $2.95
High grade fine looking mountings. Polished black composition. Center receptacle stationary, two outer ones adjusted by knobs. Takes any standard mounted coil.

RADIO JACKS AND PLUGS

Finest grade jacks. Improved design. Best materials. Phosphor bronze springs. Silver contact points. Nickel finish. Mount on panels ⅛ to ⅝ in. thick.

Jacks Only
L390 Open circuit. Each.....43c
L391 Closed circuit. Each.....49c
L392 Two circuit. Each.....60c
L393 Single circuit filament cont. 69c
L394 Two circuit filament cont. 85c
L395 Plug. Large space with set screws for attaching cord. Each..... 35c

BINDING POSTS

Brass, polished nickel finish. Washer and 6-32 in. screw extending ⅝ in.
L370 Large size—barrel and knob ⅝ in. long, dozen..85c
L372 Smaller size—barrel and knob 9-16 in. long, dozen. 70c
L374 Large size with composition knob, dozen.....50c
L376 Large size with hole for phone tip or wire, dozen.....80c
L378 Small size with hole for phone tip or wire, dozen 35c

SWITCH CONTACT POINTS

Brass polished nickel finish. All have ⅝ in. long size 6-32 screws and two nuts. All prices the same.
Dozen 10c Hundred $1.05
Order by Article Number.
L360 Head, ¼ in.; Diam. ¼ in. High
L362 Head, 3-16 in.; Diam. ⅛ in. High
L363 Head, 3-16 in.; Diam. 1-16 in. High

SWITCH LEVERS



Moulded composition knob. Exposed metal parts polished nickel finish. Fitted with panel bushing, spring and two set nuts. A high grade switch.
L382 1¼ in. Radius
L381 1¾ in. Radius } 15c Ea.
L380 1 in. Radius

SWITCH LEVER STOP

Brass, polished nickel finish.
L386—Dozen 15c. Hundred $1.05

ONE-PIECE DIAL AND KNOB



Moulded in one piece of polished black composition with clean plain engraved scale and numerals in contrasting white enamel. Ribbed knob to fit the hand. An attractive neat pattern.

L900 2 in. Diam. for 3-16 in. shaft. Ea...19c
L901 2 in. Diam. for ¼ in. shaft. Ea.....19c
L904 3 in. Diam. for 3-16 in. shaft. Ea...25c
L905 3 in. Diam. for ¼ in. shaft. Ea.....25c
L906 3½ in. Diam. for 3-16 in. shaft. Ea..35c
L907 3½ in. Diam. for ¼ in. shaft. Ea...35c

OUTDOOR LIGHTNING ARRESTER



L980 Price $1.85
Protect your instruments with this lightning arrester. You cannot afford not to. Weatherproof porcelain case. Air gap type. Permanent. Durable. The most practical quality arrester obtainable. Underwriters approved.

VARIOMETER

L410—Completely assembled, price $2.10
Perfect in design and construction. Accurate wood forms of genuine solid mahogany. Correct inductive ratios. Solid baked windings. Positive contacts. Highest efficiency. A real bargain.
L411—Not assembled nor wound but all parts complete except wire, including winding form. $1.48

MOULDED VARIOMETER



Polished black moulded rotor and stator forms. Maximum inductance with greatest efficiency and minimum distributed capacity. A high grade durable instrument that will make up into a set you will be proud of and will get the best results. Wave length 180 to 600 meters. 4¼ in. square, 1⅝ in. thick.
L412 Price including mounting brackets $2.95

IMPROVED 180° VARIO-COUPLER

L418 Price $2.48
Our price shows you a big saving. An instrument of highest quality. The most efficient type of coupler. Insures sharper tuning and louder signals. Primary and secondary wound on genuine bakelite tubes. Secondary connections through soldered flexible cables eliminates contact noises. Primary has 7 taps. Can be panel or table mounted. Range 180 to 650 meters.

MAGNET WIRE

Insulated copper wire. Best quality even drawn wire, one piece to a spool. Prices quoted are for 8 oz. spools.

Double Cotton Covered		Enameled Insulation		Green Silk Covered	
Number L990		Number L992		Number L991	
Gauge	Price	Gauge	Price	Gauge	Price
18	50c	20	43c	20	$0.78
20	60c	22	55c	22	.90
22	75c	24	61c	24	1.05
24	85c	26	85c	26	1.18
26	95c	30	70c	30	1.70
28	$1.15	32	79c	32	2.05
30	1.65	36	98c	36	2.75

STRANDED ANTENNA WIRE

Cabled of fine copper strands. Very flexible. High tensile strength. Best for aerials.
L248—100 ft. coil 72c L249—500 ft. coil $3.20

SOLID BARE COPPER WIRE

Solid bare copper wire for aerials, leads or wiring instruments.

Solid Bare Copper Wire, size 14
L240—100 ft. coil 49c L242—500 ft. coil $2.35

Solid Bare Copper Wire, size 12
L244—100 ft. coil 67c L245—500 ft. coil $3.05

ANTENNA INSULATORS

L260 Size 1x3½. Two for 17c
L267 Size 2¼x3¼. Two for 35c
L264 Size 1½x4. Two for 69c
L268 Size 1⅝x10½. Two for $1.28



L260 L262 L264-6

PHONE AND GRID CONDENSERS

A compact style of condenser that is very satisfactory. Conducting sheets and dielectric are wound on fiber strip with eyelets for mounting and connections. Each, .8c
L170 Phone Condenser .001 Mfd.
L172 Phone Bridging Condenser .0005 Mfd.
L174 Grid Condenser .00025 Mfd.
L175 Condenser .006. Each.....25c
L176 Grid Condenser .00025 with pencil mark leak. Each 12c

TUBULAR GRID LEAKS AND CONDENSERS—MOUNTED STYLE

Very convenient. Permits quick change of leaks or condensers of varying capacities.
Grid Leaks Price Each 24c

Resistance		Resistance	
L850	.5 Meg.	L855	2. Meg.
L851	1 Meg.	L857	3. Meg.
L853	1.5 Meg.	L859	5. Meg.

GRID AND PLATE CONDENSERS

Price, each 55c
L832 .0001 Mfd. For special circuits.
L834 .00025 Mfd. For U.V.201 and Cun. 301
L836 .0005 Mfd. For U.V.200 and Cun. 300

MOUNTINGS

Bakelite base. Spring clip contact.
L840 Single mounting. Each.....32c
L842 Double mounting. Each.....57c
L844 Triple mounting. Each.....76c

OUR SPECIAL AUDIO FREQUENCY AMPLIFYING TRANSFORMERS

As high as three stages can be used without howling due to proper impedence ratio, minimum distributed capacity, low core losses and proper insulation. Mounted style has bakelite panel with binding post connections. Unmounted has core and coils assembled with two holes in core for fastening to apparatus.
L234 10 to 1 Mounted. Each.....$3.48
L235 10 to 1 Unmounted. Each..... 2.95
L236 3 to 1 Mounted. Each..... 3.40
L237 3 to 1 Unmounted. Each..... 2.85

BARAWIK SPECIAL PANEL MOUNTING VARIABLE CONDENSERS

L812 43 plate .001 Mfd. ..$1.73
L813 21 plate .0005 Mfd. 1.43
L814 11 plate .00025 Mfd. 1.32
L815 3 plate Vernier 89
These are especially high grade condensers and we guarantee them to be mechanically and electrically perfect. Fine polished end plates of heavy bakelite. Shafts ¼ inch diameter. Sturdy, heavy aluminum alloy plates perfectly spaced to insure smooth, even reliable capacity. Our low prices save you money. These condensers are of the very best make and are not to be compared with many inferior cheap condensers offered. We guarantee them to please you or your money back.

COMBINATION VERNIER VARIABLE CONDENSERS

L824 23 plate .0005 Mfd. with dial and knobs. Price....$2.89
L826 43 plate .001 Mfd. with dial and knobs. Price....$3.45
The latest improvement in condensers consists of regular variable condenser controlled by large knob and dial mounted with a three plate vernier condenser, which is controlled by separate knob mounted above knob on dial. This arrangement permits of very fine tuning. Compact convenient mounting on panel. High grade design and construction. Finely finished.

STANDARD BRAND HEADSETS

L754 Baldwin Type C with universal jack plug $11.75
L755 Baldwin Type C unit with cord $5.50
L756 Red-Head, 3000 ohm 5.75
L768 Brandes, 2000 ohm 3.40
L770—2000 ohm Harawik 3.75
L751 Murdock 56, 2000 ohm 4.20
L752 Murdock 56, 3000 ohm 4.95
1764 Frost, 2000 ohm 4.20
L766 Frost, 3000 ohm $4.85
L758 Western Electric, 2200 ohm..... 9.50

CABINETS



Fine looking cabinets solidly built. Elegant hand rubbed finish. You will be proud of your set mounted in one of these cabinets. Hinged tops. Front rabbeted to take panels. Panels not included. Prices are transportation paid.

Panel Size	Inside Dimensions High	Wide	Deep	Art. No.	Price Each
6x 7"	5½"	6½"	7"	L420	$2.48
6x10½"	5½"	10 "	7"	L422	2.75
6x14"	5½"	13½"	7"	L424	3.30
7x14"	6½"	13½"	7"	L423	3.60
7x18"	6½"	17½"	7"	L426	3.90
7x21"	6½"	20½"	7"	L425	4.20
9x14"	8½"	13½"	10"	L428	3.70
13x14"	11½"	13½"	10"	L430	4.40
12x21"	11½"	20½"	10"	L432	5.25

RADIO "BAKELITE" PANELS

Notice our very low prices on this fine quality material. We supply genuine Bakelite, Condensite Celeron or Formica, all of which are materials with practically identical mechanical, chemical and electrical properties. Machines well without chipping. Won't warp. Waterproof. Highest mechanical and dielectric strength. Attractive natural polished black finish which can be sanded and oiled for extra fine work.

Panel Size Inches	⅛" thick Art No.	Price	3-16" thick Art No.	Price	¼" thick Art No.	Price
6x7	L450	$0.50	L460	$0.75	L470	$0.98
6x10½	L451	.75	L461	1.11	L470	1.47
6x14	L452	1.05	L462	1.55	L472	2.05
7x14	L453	1.20	L463	1.80	L473	2.40
7x18	L453	1.55	L463	2.30	L473	3.10
7x21	L457	1.75	L137	2.65	L477	3.62
9x14	L454	1.60	L464	2.30	L474	3.10
12x14	L455	2.10	L465	3.10	L475	4.15
12x21	L456	3.15	L466	4.65	L476	6.20

VARIABLE GRID LEAK

Pencil mark type. Resistance may be varied exactly as needed. L160 Each 19c

GRID CONDENSER

L162 Mounting holes spaced to fit lugs of above leak. Cap. .00025 MF. 8c
L163 Same as 162 but higher grade. Enclosed in metal case. 39c

Google Original from UNIVERSITY OF CHICAGO

You Can Build Your Own Radio Apparatus

As Easily as a Woman Makes a Dress!

"CONSOLIDATED" PATTERNS

are designed by the foremost radio engineers and by our novel method of construction anyone can easily make efficient apparatus to receive all wave lengths. All Patterns are Full Size, printed on heavy Blue-Print paper and put up in attractive packet of heavy manila, 9x12'. Each one is fully illustrated by photographs.

Every packet contains complete instructions for the construction of these circuits including the tools required, parts needed, directions and pattern for drilling, mounting and wiring and most important of all, full instruction on how to tune the circuit. Sets constructed from these plans have been thoroughly tested and pronounced perfect.

A Cockaday Receiver

The Cockaday four-circuit tuner is one of the latest advancements in radio. Its main advantage lies in the fact that the set can be adjusted to the highest point of regeneration, and tuning accomplished over a wide band of wave-lengths without the necessity for readjusting the regeneration control. The set described in our folder was designed and built at our own shop. All dimensions, size of wire, number of turns, etc., are given, leaving nothing to the imagination.

50c.

A Reflex Receiver

The plans for the reflex receiver were gotten out only after considerable research work by our engineers. Most people have trouble with reflex receivers. It takes an expert to build one that will work satisfactorily. The trouble lies in the values of condensers, etc., in the circuits. If they are incorrect, the set is a dismal failure. The constructional details of a reflex receiver, contained in this folder, are the results of their successful efforts.

50c.

A Reinartz Receiver

The original Reinartz Receiver is the most popular type of set in existence today. It gained its popularity through its simplicity of operation and capability of long-distance reception. Full directions for building this receiver are given in this folder. The construction of the coil—the most difficult part—is made easy with the concise instructions we furnish. The connections of the set are shown plainly, so that the novice will have no trouble in following them.

50c.

Twenty Radio Phone Diagrams and Hook-Ups

These diagrams show how to get the best possible efficiency from the instruments you make or purchase. They cover hook-ups from the simplest to the most complicated, in a way that any amateur can understand and follow without difficulty. Printed on heavy paper, 8½x11½ inches, and together with KEY CHART OF SYMBOLS and pamphlet "HOW TO READ DIAGRAMS", are contained in a heavy two-color envelope.

50c.

All About Aerials and Their Construction

These blue prints were made after practical erection of each aerial, and point out how simple it is to erect not only the proper aerial for your particular need, but how to erect this aerial in the most practical manner and at the least expense.

Consists of 12 blue prints 8½x11 inches and one four-page instruction pamphlet 8½x11 inches.

50c.

14 Radio Formulae and Diagrams

With this packet of radio knowledge you need never worry about schematic wiring diagrams, measurements and radio tables. All formulas and diagrams are printed on heavy paper in black and blue; and contained in two-color printed envelope, 9x12 inches.

50c.



A Short Wave Regenerative Receiver

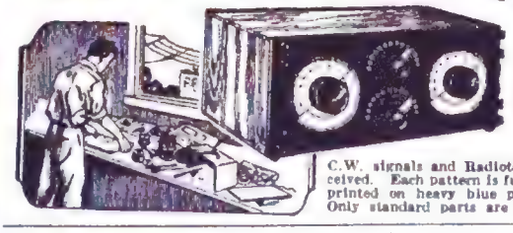

Easy to build. No machine shop needed. One of the foremost Radio engineers constructed this set for us; it's simple to follow our patterns and assemble the parts comprising this set with which spark, C.W. signals and Radiotelephony may be received. Each pattern is full size and printed on heavy blue print paper. Only standard parts are used.

50c.

Detector and Amplifier Units

Can be built anywhere in your house; no machine shop needed. May be used with any type of Regenerative Receiver or short wave set, with which spark, C. W. Signals and Radiotelephony may be received. We've tested these patterns by actually building the outfit — they're perfect! Only standard parts used in making the outfit.

50c.

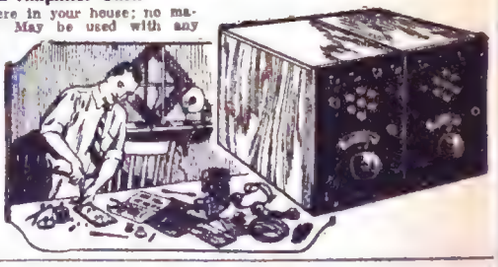

Order from dealers whose names appear on page 512

If your dealer cannot supply you, order from us, giving his name and address

The Conrad Co. INC.

Formerly The Consolidated Radio Call Book Co.

233 Fulton Street, New York City

Publishers of Consolidated Patterns and Sales Agents for E. I. Co. Books

Digitized by Google

Original from UNIVERSITY OF CHICAGO

NATIONAL
Apparatus of Standard Quality and Value

Simplicity and Perfection

The Monodyne circuit is one of the most radical advances in Radio engineering. Parts heretofore considered essential are omitted. One simple tuning control gives selectivity, equal if not superior to sets costing hundreds of dollars.

Only One Control
All Wave Lengths

2 coils are furnished with each set.

NATIONAL
INTERFERENCE ELIMINATOR

The National Interference Eliminator can be used with any and all radio outfits no matter what make, tube or crystal sets. Will bring in stations you never heard before. Nothing else required with set as illustrated. Just connect it with two short wires to your outfit.

Price $7.50

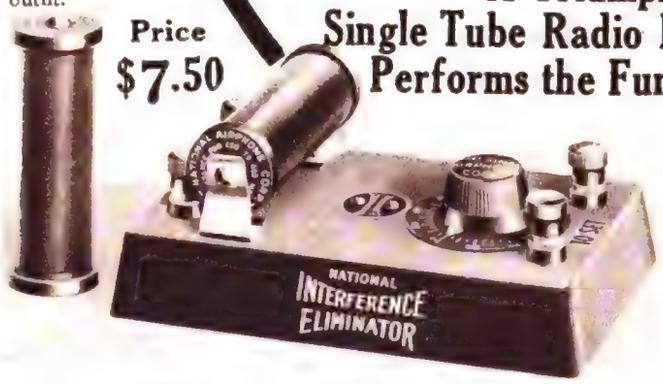

NATIONAL "GOLD-GRAIN" DETECTOR

For Reflex and Crystal Sets

$1.00

Actual Size
FOR PANEL MOUNTING

NATIONAL MONODYNE
PAT. TRADE MARK PDG.
TUBE SET
MODEL GT-1

Entirely New Circuit
No Storage Batteries

Uses but one dry cell tube, preferably WD-12, or any other standard dry cell tube. Local broadcasting comes in astonishly loud and clear, without distortion.

$10
Including Two Inductance Coils Without Tube

A Triumph in Radio.
Single Tube Radio Frequency Receiver Performs the Function of 2-Tubes

1000 Miles ON THE MONODYNE

Having purchased your Monodyne set I was more than pleased over the results obtained from it. I think it is one of the best one-tube sets on the market today.
I have heard the following long distance stations—WDAF Kansas City, WDAP Chicago, WSB Atlanta, WOO Philadelphia, WGY Schenectady, WOC Davenport, and a Canadian station whose call letter I could not obtain.
Using hook-up No. 4 gives very selective tuning and volume. Your set cannot be praised too highly.
WILLIAM BROWN
65 East 117th St., N. Y. C.

An Absolute Necessity to Clear Reception
Eliminates broadcasting and code-signal interference
Can be used to increase or shorten wave lengths

Dealers, Jobbers and Distributors
Send for Samples and Prices

NATIONAL AIRPHONE CORPORATION
20 HUDSON ST. NEW YORK

SEND NO MONEY

National Airphone Corporation 8.I-9-23
20 Hudson Street, New York City, N. Y.

Gentlemen:

Please send me prepaid the articles crossed, for which I will pay postman on delivery the advertised price.

One ☐ National Monodyne
One ☐ Interference Eliminator
One ☐ Panel Detector

NAME .....
STREET AND NO. .....
CITY ..... STATE .....

Digitized by Google
Original from UNIVERSITY OF CHICAGO

NEW 25c BOOKS
That Every Novice or Amateur Needs

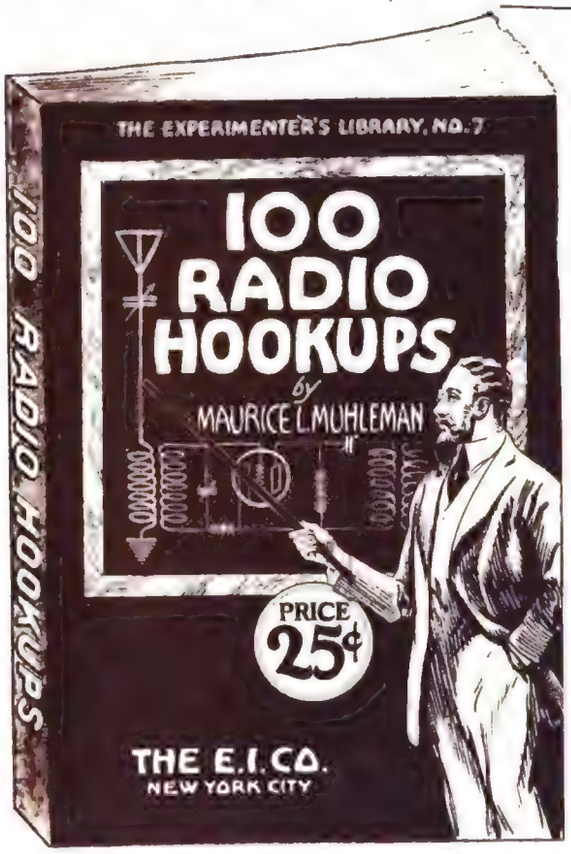

100 Radio Hook-ups

By M. L. MUHLEMAN

A book for both the novice and advanced radio amateur containing a varied selection of hook-ups from the simple crystal to the more elaborate circuits, with a circuit for every requirement. Crystal hook-ups, combined crystal with radio and audio frequency amplifiers, non-regenerative, and regenerative vacuum tube circuits with and without radio and audio amplifiers. Amplifier units, with straight jacks, filament and switching arrangements, power amplifiers, choke coil, resistance coupled and transformer coupled radio frequency amplifiers.

Includes all of the latest, one and multi-tube hook-ups including the numerous types of Reflex, super regenerative, super-Heterodyne, Neutrodyne, Reinartz, Flewelling, and Bishop. The values and constants of all apparatus employed in the hook-ups are given. A list of radio symbols is included, which are of material help to the reader in determining the meaning of the conventional hook-up diagrams. The text includes much helpful information.

52 Pages—Two-Color Cover ..... **25c.**



This book covers in comprehensive form, the fundamental principles of tuning. The characteristics of radio waves are fully described and illustrated. Illustrations are used so that the non-technical reader can easily understand the identical actions as applied to radio. Several chapters are devoted to the use and functions of all radio apparata. The book describes how to tune such sets as the Reinartz, Flewelling, Neutrodyne, radio frequency amplifier receivers and other.

52 pages, 25 Illustrations Prepaid **25c**



This book describes and gives complete data for building two distinct types of loud talkers. One chapter deals with improvised loud talkers, and gives complete instructions on how to build suitable horns for use in loud receivers of the Baldwin and other types. In preparing these designs, the point has been constantly kept in mind to use the simplest parts possible, so that anyone can build a successful loud talker, equivalent to the commercial types, costing $40.00 or more.

48 pages, Profusely Illustrated Prepaid **25c**

A non-technical book for the beginner. Gives complete constructional data on the building of a complete Crystal Detector Set, Tuning Coil, Loose Coupler and a Single Audion Tube Set with Amplifying Units. It furnishes all dimensions and working drawings of every part that must be constructed by the amateur. Written in plain, simple language that anyone can understand. The opening chapter gives a complete description of the theory of radio and tells what it's all about, teaching the principles of wireless so that the constructor knows what he is doing.

48 Pages, 26 Illustrations Bound in Beautiful Two-Color Cover. Size, 5½ x7½ in. Prepaid..... **25c**



This book is for the more advanced amateur, showing the construction of the Radio Frequency Amplifying Transformer and giving complete constructional data. It shows the application of Radio Frequency to amplifying units that the amateur may already possess and gives 15 hook-ups showing practically every use Radio Frequency Amplifying Transformers can be put to.

32 Pages, 15 Illustrations Bound in Beautiful Two-Color Cover. Size, 5½ x7½ in. Prepaid..... **25c**



A complete list of dealers carrying these books will be found on page 512

If your dealer cannot supply you—order direct from us—giving dealer's name and address.

THE E. I. COMPANY (THE CONSRAD CO. Selling Agents) **233 Fulton St., N. Y. City**

Digitized by Google
Original from UNIVERSITY OF CHICAGO

Popular Astronomy

(*Continued from page* 484)

ecliptic once in about nineteen years. As a result eclipses occur at a different time each year, but always at intervals of six months. Two weeks following or preceding the time of solar eclipse there may be also an eclipse of the moon, when earth, sun and moon are again in line with the *earth* between the sun and moon, which occurs at the time of full moon. There are usually two lunar eclipses a year and there may be three under certain circumstances. There are years when no lunar eclipses occur, but there must be at least two *solar* eclipses each year and there may be as many as five. The greatest number of eclipses that can occur in a single year is seven, five of the sun and two of the moon. All solar eclipses are not total. In some cases the axis of the shadow-cone cast by the moon passes just clear of the earth above one of its poles without striking the surface of the earth at any point and in this only the partial phase of the eclipse is observable upon the earth's surface.

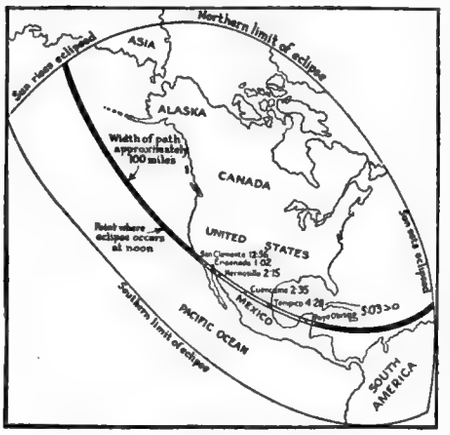

The Path of Coming Solar Eclipse.

The principal work that will occupy the attention of the eclipse expeditions will be the procuring of negatives to test the Einstein effect.

A "DX" Receiver with Novel Tuner

By P. A. PRICE

(*Continued from page* 473)

The antenna rotor, or primary, is made up of a bakelite, hard rubber or wooden ball-type rotor fitting snugly but free to turn in the stator tube. It is wound with 35 to 40 turns of No. 22 silk-covered wire.

The tickler rotor is similar to the primary, but is wound with 55 to 60 turns of No. 26 silk-covered wire. 30 feet of No. 22 wire is used on the antenna rotor and 45 feet of No. 26 is required for the tickler.

The condenser bank to be used in the aerial circuit is constructed of five fixed condensers of the following capacities: two .0005, two .00025, one .001 M.F. They should be strung upon a two-inch brass bolt in this order: .001, .0005, .00025, .0005, .00025. The second and third condenser, that is, the .0005 and .00025 condensers nearest the .001 condenser should be connected together at the top and this condenser and each one of the other condensers connected each to a separate tap in the condenser bank switch set.

It will be noted that when the switch-arm is placed on the tap connected to the .001 condenser, a capacity equal to that of a 43-plate variable condenser is obtained. When the switch-arm is placed on the tap which is connected to the .0005 and .00025

No Matter What Your Vocation

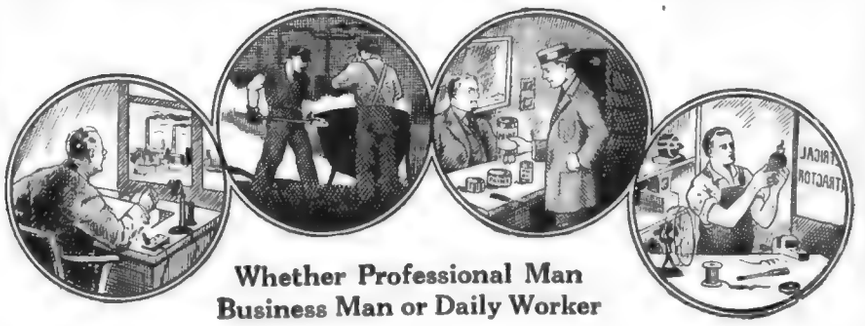

Whether Professional Man Business Man or Daily Worker

A Thorough Training In CHEMISTRY Will Help You To Get Ahead

TO be successful today is to know Chemistry! Every line of business, every branch of industry depends upon Chemistry in some form. You may not realize it, but your own proficiency in whatever work you are doing would be increased by a knowledge of Chemistry. In many lines such knowledge is absolutely essential. In others it is a guarantee of promotion and more money.

The keen competition that exists in every commercial activity today requires that a man know all there is to know about his vocation. If you have something to sell—no matter what—Chemistry enters into its make-up. The salesman who knows the chemical composition of his article can talk about it more intelligently than the one who lacks this information, and his sales are proportionately larger. In the building trades Chemistry is of prime importance. The mason, electrician or painter who knows something about Chemistry can do better work and command more money than the one who does not. Through Chemistry a shop-keeper learns how to attract the most trade, and even in clerical positions one can capitalize his chemical skill.

Chemistry should be as much a part of your mental equipment as the ability to calculate or to write correct English. The world is paying a thousandfold more for ideas than for actual labor. The big rewards go to the man who can show how to turn out a little better product at a little lower cost. And Chemistry will give you the ideas that will save money for yourself or your firm in the very fundamentals of your business. There is nothing remarkable about this; it is going on every day. If you have not heard of it before, it is because the general public has been slow to recognize the tremendous value of chemical training. People have been content to leave Chemistry in the hands of a few trained chemists who could not possibly develop the subject to anywhere near its greatest extent.

Now we are on the eve of a great awakening. Our heritage from the World War has been an intense development of the chemical industries in the United States and a tremendous interest in all the applications of Chemistry. People are taking up the subject merely for the good it will do them in their own line of business.

It is no longer necessary to enter college in order to learn this fascinating science. Our Home Study Course trains you just as thoroughly, and with the same assurance of success, as those who took the longer way. And our methods are so simple that we can teach you no matter how little previous education you may have had. Many of our graduates now hold responsible positions or have materially increased their incomes from private enterprises as a result of taking our course. Hundreds of letters from students testifying to the benefits they have derived from our training are here for your inspection.

Remember that you do not need to study Chemistry with the idea of actually practicing as a chemist, although a great many of our students are taking our course with this object in view. If you want to know more about what Chemistry will do for you, if you want to know what our home study course offers, sign and mail the coupon today for FREE BOOK "Opportunities for Chemists."

Chemical Institute of New York, Inc.
66-D West Broadway, New York City

DR. T. O'CONOR SLOANE Will Teach You Chemistry In Your Own Home

The Chemical Institute of New York, of which Dr. T. O'Conor Sloane is Educational Director, was founded to fill the need of ambitious, far-sighted men who realize and recognize the splendid future Chemistry offers them, but who cannot spare either the time or the money to attend college. Dr. Sloane, a foremost authority on Chemistry, will teach you and will give you any individual help you may require. He will personally go over your papers, correct them, point out your faults, teaching you in a practical and interesting way. No special education required other than the ability to read and write English. One student has characterized our lessons as "The course that takes the mystery out of Chemistry."

Read What One of Our Recent Graduates Reports

"I thought I would let you know of my success. I finished your course about two months ago and now have a fine position as chemist at the DuPont Dye Works. I am getting along fine with my work and like it very much. It was through your course alone that I have been so successful. It is wonderful and I hope you have great success with it.

(Name and Address on request).

Easy Monthly Payments

You do not have to have even the small price of the course to start. You can pay for it in small monthly payments—so small that you won't feel them. The cost is very moderate, and includes everything, even the Laboratory Equipment—there are no extras to buy with our course. Our plan of monthly payments places a chemical education within the reach of everyone.

Laboratory Equipment Given To Every Student Without Additional Charge

We give to every student without additional charge his chemical equipment, including forty-two pieces of laboratory apparatus and supplies, and seventeen different chemicals and reagents. These comprise the apparatus and chemicals used for the experimental work of the course.

Special 30-Day Offer

For a short period we are making a special offer that will be worth your while to take advantage of. Write for particulars, using the coupon below or simply a postal card. This will not obligate you in the least. Do not wait until to-morrow. Send the coupon now while you think of it.

Sign and Mail the Coupon for FREE BOOK

CHEMICAL INSTITUTE OF NEW YORK, Inc.
Home Extension Division 9
66-D—West Broadway, New York City.

Please send me at once without any obligation on my part, your Free Book "Opportunities for Chemists," and full particulars about the Laboratory Equipment furnished to every student. Also please tell me about your plan of payment and your special 30 day offer.

NAME .....

ADDRESS .....

CITY .....

STATE .....

S.&I., 9-23

Digitized by Google
Original from UNIVERSITY OF CHICAGO

TRADE MARK REG.
WURLITZER
SUPREMACY IN MUSICAL INSTRUMENTS

Learn to Play

You are always popular and sure of a good time if you can play some musical instrument. By yourself, with your friends around the piano, in orchestras or bands—there is no end to the pleasure music will give you. And there is no easier way to earn money in your spare time. Choose your instrument now and let Wurlitzer help you buy it and learn to play it.

Try Any Instrument in Your Own Home At Our Expense

You may now have any known musical instrument for a week's free trial in your own home. There is no obligation to buy—no expense for the trial. You may return the instrument at the end of a week if you decide not to keep it.

Easy Payments

The Wurlitzer plan makes it easy for you to own the instrument you want. Payments are conveniently arranged in small monthly sums—a few cents a day will pay.

Wurlitzer instruments are known everywhere for their unusual tone quality and excellence of workmanship. They are used by the greatest professional musicians, bands and orchestras. Harry L. Jacobs of Sousa's Band, Brooke's Marine Band, and Chicago Grand Opera, says: "I am proud to be the owner of one of your new cornets. It is positively superior to anything I have had in all my years of cornet playing."

Thousands of amateur musicians are playing on Wurlitzer instruments. Many of them could not have bought except through the Wurlitzer selling plan. Wurlitzer is the world's greatest music house, with stores and dealers in all parts of the country. But no matter where you live you will receive the same service by mail as though you lived next door to the factory.

Send for Free Catalog

The greatest musical catalog ever published. Over 3000 articles—every instrument described and illustrated—many of them shown in full colors. Gives you all details of the Wurlitzer plan. Send the coupon today.

The Rudolph Wurlitzer Co., Dept. 1258
117 E. 4th St., Cincinnati 329 S. Wabash Ave., Chicago
120 W. 42nd St., New York 250 Stockton St., San Francisco

Send me, absolutely free, your new illustrated catalog of musical instruments. Also tell me how I may try any instrument in my own home at your expense and how the Wurlitzer plan makes it easy for me to buy. No obligation.

Name .....

Address .....

City ..... *State* .....

Instrument .....
(State instrument in which you are interested)

Copyright 1923, The Rudolph Wurlitzer Co.

condensers hooked together, a capacity is obtained approximating that of a 37-plate condenser. When the switch-arm is turned to the tap connected with the .0005 condenser a capacity approximating that of a 23-plate condenser is obtained, and when the .00025 condenser tap is used, a capacity approximating that of an 11-plate condenser is available.

Five condensers are indicated in the foregoing description of the condenser bank but this number may be reduced to three; .001, .0005, and .00025 M.F. The grid condenser should be .00025 M.F. preferably mica, and the grid leak should be five or six megohms.

Variable Stars

By RUFUS O. SUTER, Jr.

(*Continued from page* 437)

denly blaze forth from invisibility, attain great brilliancy, then gradually fade away until no longer discernible. (See illustration 1, Fig. C.)

2. Stars which periodically pass from a maximum brightness to a minimum faintness. The time elapsing between two successive maxima or minima, the period is more than 100 days.

3. Stars that are irregular in period and range.

4. Stars whose periods are less than 100 days, and fairly regular.

5. Stars that are regular in period and range.

Sir Norman Lockyer's meteoric hypothesis explains both the peculiar fluctuations and the apparent motion. Groups of meteors entered a nebulous area, where their repeated collisions caused frequent conflagrations of varying intensities. The greatest conflagration was the nova. The lesser conflagrations, illuminating different parts of the nebula, gave the effect of motion. It is interesting to consider that if Kayser's theory is right, the new star actually burst forth at about the time Galileo discovered the moons of Jupiter. The light bearing the image of the catastrophe has just reached us.

The novae are no more baffling than the long period variables of Class 2, whose spectra undergo changes almost coincident to the light cycle. At minimum either titanium oxide predominates, or carbon, or elements which have not been recognized in earth. During the rise to maximum, hydrogen lines appear which become most distinct at actual maximum, and are accompanied by iron, magnesium, and calcium vapor. With the decline in brilliancy, these latter elements frequently outshine the hydrogen. At minimum the stars display the same spectra as originally. Long period variables are usually characterized by a comparatively rapid ascent to maximum, where they remain a few days, then more gradually descend to minimum, in which condition they remain the greater part of the time. (See illustration 1, Fig. A.)

The most plausible theory is an adoption of Sir Norman Lockyer's meteoric hypothesis. If a mass of meteors were conceived as traveling in an orbit around a larger and more diffuse mass, situated toward one side of the orbit, frequent collisions between the two groups of meteors would cause periodic outbursts of brilliancy. The maxima, in accordance with observation, would differ slightly from time to time. (See illustration 2.)

Entirely distinct from the novae and long period variables, are the stars of Classes 3 and 4. The fluctuations in the former case are without regularity; and in the latter ... so complicated that a long series of ob-

(*Continued on page* 498)

BUILDING YOUR OWN RADIO

is much like building up your own physique. Nature has already supplied you with the *material* and *parts*—I supply you with the *method* and *plans*. If you will *hook-up* with me as your instructor you will *receive* the best advice and personal attention that can be had.

AMPLIFY YOUR MUSCULAR SYSTEM

Recharge your nerve *cells* with new *vigor*. *Vibrate* your *diaphragm* with full breathing. These are a few of the *transmitters* of health. The right kind of exercise, food and a few other essentials are the only *transformers* of the human body.

MY COURSE IS CONDENSED

therefore you will be saved valuable time in your exercising periods. The *super-regenerative qualities* of my methods will surprise you. My system is a real *tuner* of the internal organs. This toning-up will cause the whole organic system to work in perfect *harmony*.

MY ART BOOKLET

is full of Art Poses and the explanation of my methods is as clear as a good *blue-print*. By the requests of thousands of magazine readers this BOOKLET is being *broadcasted* over this and foreign countries. If you will send 10c (stamps or coin) I will be glad to have you *listen-in* on what this Booklet has to say and show.

CHARLES MACMAHON
5519 N. Fifth St.
Studio C-4 Philadelphia, Pa.

You can play a CONN

Easiest of all instruments to play, the Conn saxophone is also hailed best by famous stars.
Play popular tunes in short time.
Big money, lots of fun for you.
Free Trial—Easy Payments.
C. G. Conn Ltd., Elkhart, Ind.
966 Conn Building
CONN

CULTIVATE YOUR MUSICAL BUMP

"Largest Radio Store In America"

Upon receipt of your name and address we will send you our weekly catalogue. You will be astonished.

CHICAGO SALVAGE STOCK STORE
509 S. State St. Chicago, Ill.

"BECOME A LIGHTNING TRICK CARTOONIST"

Make money chalk talking. Send $1.00 for snappy program of trick drawings, with instructions by a professional cartoonist. Satisfaction guaranteed. Circular free. Balda Art Service, Dept. 4, Oshkosh, Wis.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

How Submarines Dive and Rise

By IRWIN R. FAHRLAENDER

(*Continued from page 426*)

underneath the boat, he would be able to support the residual weight of the boat in the palm of his hand.

Numerous other tanks are contained in the vessel, such as the trimming tanks, which, as the term implies, affect the position of the vessel; they are used to correct the fore and aft trim, which may vary by the shifting of weights such as men, stores, torpedoes, fuel, lubricating oil or fresh water.

The larger submarines are not so sensitive, but in the smaller types in use a few years ago, it was customary for the crew to remain at their stations without moving, unless the command officer ordered a man to move forward or aft so many feet. In fact, we used to say we had to keep our hair parted in the middle, the boats were so sensitive.

Our ballast tanks are full, fore and aft trim is established, also the buoyancy. We are now ready to go about our business, which is either a practice run, an attack on a real enemy, or last but not least in the eyes of the enlisted men, to earn the extra compensation every qualified submarine man gets for every time he submerges. Officers do not get extra compensation.

To the uninitiated the interior of a submarine seems fairly crammed with pipes, valves, gauges, wheels, shiny steel and brass fittings, voice tubes, etc., all apparently pushed into place without much system, but let me tell you every so-called gadget has its use and is an essential part of the mechanism necessary for the successful operation of a submarine.

"SILENCE" THE ORDER WHILE SUBMERGED

Let us look around the boat. We see the crew apparently sitting around doing nothing, probably conversing in whispers, as silence is insisted upon while submerged, but every man is at some particular station, waiting for orders to perform some necessary task.

The commanding officer and the second lieutenant are at the periscopes keeping a sharp lookout. Another officer or (chief petty officer) keeps an eye on the crew.

In the torpedo room we find the torpedo tubes at the forward end, and in the racks on either side the spare torpedoes, tools, etc., and under the deck the fuel oil tanks.

In the next compartment we find the crew's quarters with lockers and bunks, and underneath, if we take up the deck, will be found part of the storage battery, which is used to supply power to the electric motors, which are used when submerged.

In the next room, called the C. O. C., you will find the entire control system of the boat. A mass of wheels, dials, levers and the automatic blow valve, a device set at a predetermined depth which will by means of compressed air, automatically expel the water from the tanks without human assistance.

Then we have the after battery compartment, underneath the deck of which we find another part of the storage battery. In one corner of this compartment we see the galley range which is heated by electricity, and a very complete outfit capable of producing anything from roasts to pastry. In various other places we find an ice box, lockers for dishes a folding table to eat from and more switchboards.

Next is the engine room which contains the powerful Diesel engines, which are used for surface running.

Be the Man Who Knows

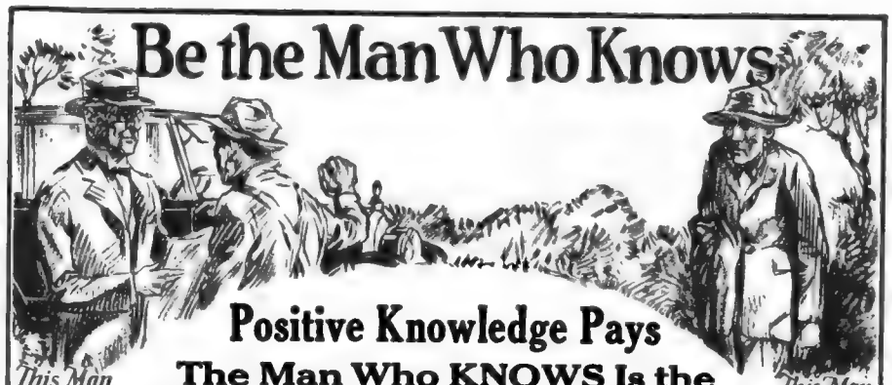

Positive Knowledge Pays

The Man Who KNOWS Is the Man Who Gets the Big Money

This is true in any institution—in any line of business.

Put yourself in your employer's place! Be the judge yourself! Which man would you choose to fill an important executive position where authority based on knowledge is to be exercised—the man who has "caught on" by haphazard experience or the man who possesses complete training in all phases of the work, gained from the combined instruction of recognized experts? You would pick the man who knows, of course.

Be that man yourself! Begin to build today on this firm foundation of *positive knowledge.*

The Way Is Here

5 vols. Carpentry and Contracting — was $37.50 now..... $19.80
12 vols. American Law and Practice (including free reading course and 250 page book of standard legal forms)—was $97.50 now..... 49.80
8 vols. Applied Electricity—was $60.00 now 29.80
6 vols. Auto Engineering—was $45.00 now..... 21.80
9 vols. Civil Engineering—was $67.50 now 34.80
7 vols. Employment Management and Safety Engineering —was $52.50 now.. 24.80
8 vols. Business Management—was $52.50 now..... 29.80
7 vols. Steam and Gas Engineering — was $52.50 now..... 24.80
4 vols. Sanitation, Heating and Ventilating —was $30.00 now.. 14.80
4 vols. Fire Prevention and Insurance—was $30.00 now..... 14.80
6 vols. Modern Machine Shop Practice —was $45.00 now.. 21.80
4 vols. Telephone and Telegraphy—was $30.00 now.... 14.80
4 vols. Drawing—was $30.00 now..... 14.80

Free Consulting Membership

A resident consulting staff of from 15 to 20 practical experts is waiting to solve for you any difficulty that you may have. A letter or a wire to American Technical Society will bring you an immediate answer and the solution to your problems. This advisory staff of practical men plus your working and reference library will enable you to handle successfully any job in your line. These men know all the latest methods and the newest and best ways of doing things. Let this pay-raising consulting staff be YOUR SILENT PARTNER. Use this service daily if necessary.

This Free Consulting Membership Offer Is Good for a Limited Time Only and Can Be Withdrawn Without Notice

Turn Dimes Into Dollars

Use Books FREE for One Week—Send No Money

—just fill out the coupon. After you receive the full set of books, express collect, read them over and test them out for seven days. If you don't want them, send them back at our expense. If you decide they will do for you what they have done for more than 200,000 others, pay $2.80 within one week and $3 each month thereafter until the special price is paid. **This amounts to only ten cents a day.** Mail coupon NOW if you want a bigger, better job at higher wages.

Here's your opportunity, if you want to EARN MORE MONEY. Remember, we are taking all the chances—you pay NOTHING unless you are absolutely eager to after seeing the books. Isn't this about the fairest proposition you ever saw in print?

American Technical Society
Dept. X-625 Chicago, U. S. A.

AMERICAN TECHNICAL SOCIETY, Dept. X-625, Chicago, U. S. A.

Please send me a set of..... for seven days' FREE EXAMINATION, shipping charges collect. I will examine these books thoroughly, and if satisfied, will send $2.80 within seven days and $3 a month until I have paid the special price of $..... If I decide not to keep the books, I will return them within one week at your expense. It is understood that if I keep the books I am entitled to a FREE Consulting Membership.

Name.....

Address.....

Reference.....

(Please fill out all lines, give local merchant, banker or employer as reference.)

Digitized by Google
Original from UNIVERSITY OF CHICAGO

BUILDING TRADES NEED MEN!

Thousands of good jobs at good salaries

THE business tide has turned! And the building trades are leading the way back to prosperity! Government experts estimate that two to four billion dollars will be spent for building construction this year.

To-day the most vital need of this great building program is men—trained men—men who can step right in and do the skilled work that building construction requires.

There is a simple, easy, fascinating way by which you can prepare for a good position, at a good salary. You can do it right at home, in spare time, no matter where you live, through the International Correspondence Schools.

All we ask is the chance to prove it. That's fair, isn't it? Then mark and mail the coupon printed below and get the full story of what the I. C. S. can do for you.

TEAR OUT HERE

INTERNATIONAL CORRESPONDENCE SCHOOLS
Box 6203-C, Scranton, Penna.

Without cost or obligation, please tell me how I can qualify for the position or the subject before which I have marked an X in the list below:

TECHNICAL AND INDUSTRIAL COURSES

☐ Architect	☐ Surveying and Mapping
☐ Architectural Draftsman	☐ Gas Engine Operating
☐ Blue Print Reading	☐ Automobile Work
☐ Building Foreman	☐ Airplane Engines
☐ Concrete Builder	☐ Plumber and Steam Fitter
☐ Contractor and Builder	☐ Plumbing Inspector
☐ Structural Draftsman	☐ Foreman Plumber
☐ Structural Engineer	☐ Heating and Ventilation
☐ Electrician	☐ Sheet Metal Worker
☐ Electrical Engineer	☐ Steam Engineer
☐ Electrical Contractor	☐ Railroad Positions
☐ Electric Wiring	☐ Chemistry
☐ Mechanical Engineer	☐ Pharmacy
☐ Mechanical Draftsman	☐ Metallurgy
☐ Machine Shop Practice	☐ Mining Engineer
☐ Toolmaker	☐ Navigation
☐ Civil Engineering	☐ Mathematics ☐ Radio

BUSINESS TRAINING COURSES

☐ Business Management	☐ Salesmanship
☐ Industrial Management	☐ Advertising
☐ Personnel Organization	☐ Better Letters
☐ Traffic Management	☐ Foreign Trade
☐ Business Law	☐ Show Card Lettering
☐ Banking and Banking Law	☐ Stenography and Typing
☐ Accountancy (including C.P.A.)	☐ Teacher
☐ Nicholson Cost Accounting	☐ Civil Service
☐ Bookkeeping	☐ Railway Mail Clerk
☐ Business English	☐ Common School Subjects
☐ Private Secretary	☐ High School Subjects
☐ Business Spanish	☐ Illustrating
	☐ Cartooning
	☐ French

Name .....
Street Address .....
City ..... State .....
Occupation .....
Persons residing in Canada should send this coupon to the International Correspondence Schools Canadian, Limited, Montreal, Canada.

The Real Metal Solder in Paste Form

SOLDERALL

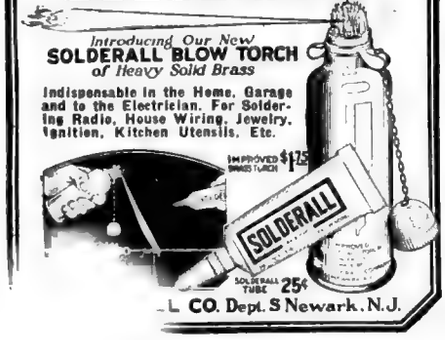
Introducing Our New
SOLDERALL BLOW TORCH
of Heavy Solid Brass
Indispensable in the Home, Garage and to the Electrician. For Soldering Radio, House Wiring, Jewelry, Ignition, Kitchen Utensils, Etc.
IMPROVED SWEET TORCH
$1.75
SOLDERALL
SOLDERALL TUBE
25¢

L. CO. Dept. S Newark, N.J.

Some people have an idea that submarines always run submerged when traveling from place to place. If you stop to think, it will be readily seen that this would be impossible, as the storage batteries would become quickly exhausted especially at high speed.

It is possible, however, to remain submerged for long periods of time by running at very low speeds or by resting on the bottom of the sea. It is merely a question of battery endurance.

I hear you say air. It is perfectly simple. The air is purified from time to time and then we have the compressed air, too, to fall back on. Of course, staying submerged for 48 hours or longer is no joke, but it can be and has been done.

Aft of the engine room we find the motor room, containing the main electric motors, high pressure and low pressure pumps, a small lathe and drill press, and the usual shiny wheels and air compressors. There is no noise here either, except the low hum of the motors as they turn over, tended by the men on watch.

Again we go aft. We find ourselves in the tiller room, a small, cramped place, containing the rudder turning gear.

Having finished our superficial inspection of the interior of the boat, let us go back to the C. O. C., and see what has taken place. We are running at periscope depth (about twenty feet below the surface) taking it easy, keeping at the set depth as if running on a track, the helmsman steering by gyro-compass, but it seems to be getting rough on the surface, so to escape the wave motion we descend to, say 100 feet.

OBJECTS SEEN WHILE RUNNING SUBMERGED

By looking through the conning tower port holes, we can see the bow and the stern of the boat in the twilight, that is, if the water is clear, the propellers showing in vague blurs as they spin.

Especially if the boat is warm and stuffy one feels as if it would be nice to open the hatch and go on deck for a stroll in the cool green water, because it seems as if the boat were suspended and without motion until if we look down we will, if in shallow water, see the bottom of the ocean sliding by.

The question is often asked: "Do you see any fish?" No, not unless the boat is lying on the bottom perfectly still as the hum scares them away. But if you put on a diving suit, arm yourself with a spear and walk around you will see many kinds of fish, rocks of many fantastic shapes, coral and marine growth of various kinds.

We are ready to come up, so the commanding officer orders the main ballast tanks blown, which is done by compressed air, forcing the water out of the tanks; or by pumping—and once again we are on the surface and in the sunlight.

200 FEET A SAFE DEPTH

In the Holland type of submarine boats we note first the hull, which is almost circular in cross-section except aft where it is flattened, so as to allow for the attaching of the propellers and horizontal and vertical rudders.

The hull is designed to withstand a pressure of 88.8 pounds to the square inch, or in other words, must be able to descend a depth of 200 feet with safety. This test must be made before the Government will accept the vessel and must stand it without undue distortion of the hull or damage to any part of the same. Greater depths have been attained though not always by design, but usually through an accident. In fact boats have descended to three hundred feet and returned without being seriously damaged.

Upon the hull is riveted a non-water tight super-structure of light construction, which provides a working platform and housing for various things, such as pipe lines, rudder rods, bow rudders, anchor gear, exhaust lines, mooring lines, and material and stores not damageable by salt water.

Secured to the hull of the boat is the conning tower surrounded by what is known as fair water, then we see the periscopes, and the above water radio mast, also protected by a housing, and forward of the periscope we see the metal bridge screen. Other outside fixtures are the usual navigation lights, the underwater radio antenna and the clearing wires, which are strong cables stretched fore and aft. The clearing wires are so designed and placed, that in case the submarine should foul a net, the boat would slide underneath instead of being held fast. In addition to these clearing wires, the Germans used a heavy contrivance securely fastened to the bow which looked like a tremendous saw. The idea was that the momentum of the boat would cause the wires to be cut when making contact with the saw.

Looking forward again we see something projecting like the ears of a jackass. They are the bow-planes, rigged out from inside the boat and now ready for diving. These planes are operated from inside the boat in conjunction with the after planes, keeping the boat while submerged on an even keel or with but slight variations from the horizontal plane. The ship is steered in the ordinary manner and is provided with twin screws. Propulsion is by means of Diesel engines on the surface and electric motors while submerged.

THE ENGINES

The engines are either 2 or 4 cycle heavy oil, reversible or non-reversible, depending on the type in use, internal combustion engines using gas oil for fuel, ignited by the heat of compression instead of ignition by a spark as in gasoline engines.

Another feature of this type is the hollow keel which is used as a main drain, which is one of the main claims to superiority of the Holland type. The boats are also provided with anchors of two types, patent and mushroom, operated from inside the boat, so it is possible to anchor while submerged, a very handy method of lying in wait for the enemy, paying out the anchor cable, thus rising to the surface for a look, then heaving round and drawing the boat down to safe depths again with the least expenditure of energy and almost no noise.

THE 5-INCH DECK GUN

On deck we find a 5-inch quick firing gun, called a *wet gun* because it is always left exposed to the water when submerged instead of being housed. It is possible to get the gun into action as soon as the deck is out of water and the crew can get up out of the boat and should be blazing away in less than a minute after emerging from the depths, as ammunition is stored near at hand ready for use.

SPEAKING OF TORPEDOES

While on the subject of armament I will say a few words about the torpedoes and tubes. A modern American torpedo is driven by steam and air at a high speed for extremely long ranges. For the benefit of those unacquainted with the wonderful weapon, we will picture a shiny cigar-shaped cylinder provided with its own complicated motive power, its own steering and diving gear, in fact a miniature submarine, which after it once is started by air from the tube, is left absolutely to itself, speeding on its deadly mission like an arrow, automatically steering, keeping its depth, oiling its own machinery, generating its own power, and, as it speeds along, preparing the T.N.T. charge which is carried, for its explosion, which will happen regardless of whether the torpedo hits nose or tail first, or just sideswipes the vessel. Then goodbye enemy and torpedo, too.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

Many people think that to disable a submarine all you have to do is shoot off a periscope. If that was all that could be done to a submarine, life would be a sweet dream thereon. There is usually another periscope in reserve and sometimes a third which is also an altiscope, used for searching the sky for aircraft.

HOW TO "BAG" A SUBMARINE

The things to do to bag a submarine is to shoot it full of holes before it can submerge, try to ram it and as you pass over the spot where she went down drop an assortment of those innocent looking cans (depth bombs) we used to see on the quarter deck of destroyers, which are filled with T.N.T. and can be set to explode at any depth, so to make life interesting for the submarine crew. It was customary for the destroyers to tear around like mad at high speed shedding bombs as fast as possible, which were set for both shallow and deep explosions, hoping that at least one would connect properly and destroy the submarine.

What is the submarine doing meanwhile? Trying, of course, to avoid the bombs by changing its course and using different speeds and depths, with all hands wondering how close the next one will be. Maybe the boat is damaged so that it cannot come up but goes down and down until finally it is crushed like an eggshell or maybe stops on the bottom in shallow water, helpless, the water pouring in, the crew working to repair the damage, finally giving up hope and trying to escape from the wrecked craft by expulsion by air pressure through the conning tower and coming to the surface to be picked up or to die as the circumstances may be.

Any number of wartime incidents could be related about damaged submarines both in our navy and in foreign navies.

So you see life in a submarine is not all beer and skittles, and it is most assuredly no place for weak sisters. But for real hemen who can take a few hard knocks and come up smiling, it is a mighty interesting life, with plenty of action.

When exigencies of the service permit, those men who desire long foreign cruises, are on request transferred to a submarine making such cruises. During the war the under-sea boats crossed the Atlantic with ease and the large fleet of submarines now on the Asiatic Station can stay at sea for four or five months if necessary.

The submarine service is an ideal place for anyone desiring to specialize in engineering, electricity or torpedoes and for anyone of energetic type it is the place for rapid advancement, not only on account of the expansion of the service, but due to the fact that everyone is always under the eye of the commander and it is very easy to form a correct estimation of a man's ability in a short time under such inspection.

Liquid and Solid Hydrogen in Quantity Production

By S. R. WINTERS

(*Continued from page* 449)

duplicate of the machinery employed in manufacturing liquid air. Moreover, the method of changing the atmosphere into a fluid is closely analogous to that of manufacturing liquid hydrogen. The difference in the two processes is this: In liquefying hydrogen, instead of starting with gas at ordinary or room temperature, as in the case of liquefying air, the compressed gas is first cooled to 200 degrees Centigrade below the commonly accepted zero point. This temperature is attained by the forced evaporation of liquid air under reduced pressure. With

Be an Electrical Expert—Make Big Money

©A S 1923

22 Big Electrical Experts Prepared This Course

C. C. Adams, B. S.
Switchboard Specialist, General Electric Company.

Morton Arendt, E. E.
Assistant Professor of Electrical Engineering, Columbia University

F. E. Austin, B. S., E. E.
Professor of Electrical Engineering and Mechanics, Thayer School of Engineeri'g, Dartmouth College

Winfield Dexter Bearce, D. S., E. E.
Statistician—Railway and Traction Engineering Department, General Electric Company.

O. J. Bushnell
Superintendent, Meter Department, Comm'nwealth Edison Company, Chicago.

Francis B. Crocker, E. M., Ph. D.
Formerly Vice-Presid't, Crocker-Wheeler Electric Company, Ampere, New Jersey.

Louis Derr, S. B., A. M.
Professor of Physics, Massachusetts Institute of Technology.

William Esty, S. B., M. A.
Head, Department of Electrical Engineering, Lehigh Univercity.

W. H. Freedman, C. E., E. E.
Head, Department of Electrical Engin'ing, University of Vermont

H. B. Gear, A. B., M. E.
Engineer of Distribution, Commonwealth Edison Co., Chicago.

Ward Harrison, M. E.
Illuminating Engineer, General Electric Company.

George J. Kirkgasser, E. E.
Electrical Engineer, The Cutler-Hammer Manufacturing Co., Milwaukee.

Robert A. Millikan, Ph.D., Sc.D.
Norman Bridge Laboratory, California Institute of Technology. Pres. of the Board of Research.

John Mills, A. M.
Engineer American Telephone and Telegraph Company.

David Penn Moreton, E. E.
Associate Professor of Electrical Engineering, Armour Institute of Technology, Chicago.

Arthur N. Nelson
Superintendent, Interior Wiring Department, Commonwealth Edison Company, Chicago.

Henry H. Norris, M. E.
Formerly Professor of Electrical Engineering, Cornell University.

Dana Pierce, B. A.
Electrical Engineer, Underwriters' Laboratories, Inc., Chicago.

E. W. Seeger, M. E.
Electrical Engineer, The Cutler-Hammer Manufacturi'g Company, Milwaukee.

George E. Shaad, E. E.
Professor of Electrical Engineering, University of Kansas.

H. M. Stoller, B. E., M. S.
Electrical Engineer, Western Electric Company.

A. G. Turnbull
Meter Departme't, Commonwealth Edison Company, Chicago.

The Best Electrical Home-Study Course That Money Can Buy

This is the most practical Electrical course ever offered. Over 20 world famous engineers—note their names and positions—have prepared our special instruction papers. This practical training course will help the ambitious man to rise quickly in the greatest field of all.

Salaries $3,000 to $10,000 a Year

Ten thousand a year is not at all unusual in the electrical field. Many ELECTRICAL EXPERTS are getting more. Even the small job repair man is making big money—there is no limit to what a real expert—the man with thorough electrical training—can earn. That is just the kind of training we are equipped to give you.

Be an Electrical Expert

The Electrical Expert is the BIG PAY MAN. All Electrical lines pay big and no other trade or profession offers as many chances for quick advancement. Do YOU want to be in the BIG PAY CLASS? Here is your chance. You can get into it quickly. We can make you a **Certified Electrical Expert in a short time.**

Own Your Own Business—Earn While You Learn

A few weeks after you start you can earn good money on the side by doing electrical repair and installation jobs. This gives you a fine start towards an electrical contracting or repair shop business of your own. We will tell you just how to do it when you are ready.

American School

The American School is not a money-making corporation, but like resident schools and colleges, is chartered strictly as an "Educational Institution, not for profit."

More than 200 famous engineers and educators prepared the special instruction papers for our students.

For over a quarter of a century, Big Engineers, Educators and Business Men have recommended the American School. They know that our long experience as an educational institution guarantees better training at less cost than can be given by any school conducted for profit.

Satisfaction or Money Back

We do more than SAY we can make you an ELECTRICAL EXPERT—we GUARANTEE it. If you are not absolutely satisfied when you have finished our Practical Electrical Course, we will refund every cent you paid us.

Free Electrical Outfit

We give absolutely free a real Electrical Outfit—containing a high-grade motor, wheatstone bridge, electrical magnet, etc. It is not a plaything, but a practical experimental outfit, that would cost you $30.00 retail.

Make Money by Joining the Big Pay Class

You wish you were in it now. You can be in it a year from now. Send in the coupon for full information and get our **free 300-page Bulletin.**

American School
Dept. E. 626, Drexel Ave. & 58th St., Chicago

AMERICAN SCHOOL, Chicago
Dept. E.626, Drexel Ave. & 58th St.

Send me a free copy of your 300 page bulletin describing the wonderful opportunity for me in Electricity. This request puts me under no obligation.

Name .....

Address .....

City ..... State ..

Digitized by Google

Original from UNIVERSITY OF CHICAGO

Auction Off Your Money

THINK of your money as something for sale to the highest bidder. That's what it actually is.

And bidders are legion. Look through the advertisements and you will find them—every one. They shout, beckon or nod to you through the medium of type and picture. Each seeks to outdo the others in the attractiveness of his offer. Each vies with the others for the privilege of your attention.

Competition is keen, if you only realized it. Each advertisement in this paper is an offer made directly to you. Each is worthy of your interest in some degree.

Read the advertisements. Know what is offered in return for your cash. Hear all the bids. Compare values. Check up on the offerings. Then you can be sure you are getting the most for your money.

Know what your money is worth
Advertisements tell you

"THERE'S MONEY IN IT"
AT HOME LEARN TELEGRAPHY AT HOME
MORSE AND WIRELESS

TEACH YOURSELF in half usual time, at trifling cost, with the wonderful Automatic Transmitter THE OMNIGRAPH. Sends unlimited Morse or Continental messages, at any speed, just as an expert operator would. Adopted by U. S. Government, and leading Universities, Colleges and Telegraph Schools. 3 styles. $14 to $30. Catalog free.



If you own a Radio Phone Set and don't know the Code, you are missing most of the fun.

OMNIGRAPH MFG. CO. 22 Hudson St., NEW YORK

rful, new device, guides your hand; corrects riting in few days. Big improvement in three No failures. Complete outline FREE.
C. J. Ozment, Dept. 44 St. Louis, Mo.

5 Master Keys

Work like magic in emergencies or prove whether your door or padlocks are burglar-proof. Open and test thousands of different locks. Recommended by users in ten different nations. Most wonderful and only keys of their kind. Send $1 today. Novel key chain FREE with set.
MASTER KEY CO., 8 Manhattan Block, Milwaukee, Wis.

the exception of this one departure, the conversion of hydrogen into a fluid is in principle identical with the liquefication of air.

HOW GAS IS LIQUEFIED

The method of producing liquid air at the Bureau of Standards is, briefly, as follows: The atmosphere is first reduced to a high degree of compression, by the application of 3,000 pounds to the square inch. The resultant heat is removed and the air is partly purified. It is preferable, but not absolutely necessary, that the atmosphere be pre-cooled to a point of a few degrees below room temperature, after which it is passed through a heat inter-changer and permitted to expand to atmospheric pressure through a valve. The air in its expanded form, is then given passage back over the heat-changer as a means of cooling the incoming compressed air. Thus little cold is wasted. The apparatus then gets colder and colder until a portion of the air is liquefied.

Fortunately, however, the Fixation Nitrogen Laboratory of the United States Department of Agriculture has developed a method for determining the presence of nitrogen in hydrogen, which element is most troublesome in the production of liquid hydrogen. This method makes it feasible to analyze the gas at all stages of its manufacture and use, as well as to locate the sources of contamination. This means of analysis is being applied at the Bureau of Standards, where hydrogen for its own needs is being made electrolytically. It is assembled in a gas holder, containing oil instead of water, and is compressed into cylinders for storage. The hydrogen, as it comes from the generator, contains about one-hundredth of one per cent nitrogen. After the gas is compressed into cylinders, about two-one-hundredths of nitrogen is present. The oxygen that gains entrance into the generator is removed by a device which heats the gas sufficiently to cause the oxygen and hydrogen to combine. If any water is present, which presence does not offer a serious difficulty, it may be absorbed by ordinary drying agents.

Liquid hydrogen is produced at a temperature of 423 degrees Fahrenheit below the zero point of the Fahrenheit scale. This fluid, like liquid air, may be preserved in vacuum containers, the vacuum serving as barriers against the entrance of heat from the outside. Liquid hydrogen may be thus retained for a period of one or two days.

SOLID HYDROGEN

Solid hydrogen is being produced in the Low Temperatures Laboratory of the Bureau of Standards at the lowest temperature ever attained in Washington, D. C., and probably the lowest point yet reached on the thermometer scale anywhere in the United States—at 434 degrees Fahrenheit below the zero point. and only 25 degrees Fahrenheit above absolute zero.

Once gaseous hydrogen has been reduced to a fluid, however, it is comparatively easy to convert it into a solid. This is accomplished by further reducing the temperature—about eleven degrees Fahrenheit lower—of the liquid by rapid evaporation in a partial vacuum. Hydrogen in this state is the lightest solid known, being one-third lighter than cork. Solid hydrogen takes the form of flakes bearing a similarity to snow or ice, and it is well-nigh impossible to preserve this solidified element for even a period of a few hours. For instance, an attempt to carry the flaky substance for a distance of four or five miles proved futile, it having completely melted.

Digitized by Google Original from UNIVERSITY OF CHICAGO

What Temperature Can the Body Stand?

By JOSEPH H. KRAUS.

(*Continued from page* 429)

when malarial fever might be indicated. If the temperature should rise on the first day to 106°, we know definitely that the patient has not developed typhoid fever, because typhoid seldom produces a temperature of over 104° in the evening of the first day, although temperatures of 105° in the evening and 104° in the morning which show a rather severe attack of this disease. may result disastrously during the third week of the attack. On the other hand, should the temperature be below 102°, it would indicate the commencement of convalescence or a relatively mild attack of this disease, and should the temperature increase above 99, but without attaining 102, and should the patient exhibit signs of pneumonia, we know that there is no soft infiltration of the lungs. A temperature of 104 in pneumonia cases indicates a severe attack. The same temperature in acute rheumatism is something to cause the individual to be anxious. Generally when the temperature rises steadily to about 106.3 to 107, the prognosis is very unfavorable, and a temperature of 110 is almost certain to prove fatal in diseased conditions. Nevertheless, there have been some remarkable reports which would tend to disprove the above statement. In cases of sunstroke, 110° is quite frequently found. In scarletina a case has been reported in which the patient developed a temperature of 112°, and in tetanus at the time of death a patient has exhibited a temperature of about 114.

A RARE CASE

It is doubtful whether anyone shall ever have another patient as remarkable as the one treated by E. E. Holt, M.D., of Portland, Maine, who is the founder of the Maine Eye and Ear Infirmary, and who was executive and senior attending surgeon of this infirmary for more than thirty years.

This patient, twenty-one years old, was treated for an ear condition from which she recovered; after an operation for the ablation of the left mastoid, she was discharged. A year later in 1901, following another operation, the temperature rose at first to 105.6° F. without any chilly sensations, giddiness or any other outward signs indicating fever conditions. There was another operation, and in twenty days the temperature rose to 108°. The skull was then trephined, and for fourteen days the temperature was normal, after which it rose again on one occasion to 108°. The temperature repeatedly rose from a point below normal, 97° to over 114°, almost daily, with the pulse running as high as 116 on rare occasions. The strangest fact was that temperatures in two different portions of the body were entirely different. Where one would register 114+ and break the clinical thermometers, the other extreme point where internal temperatures are taken, registered below 94, and consequently could not be recorded on the thermometer. A large number of thermometers were used and the temperatures taken by many surgeons. Two thermometers that registered only 114° were broken. Inasmuch as the patient was in the hospital, there was absolutely no chance of fraud. In this patient, however, although at times the pulse varied, it generally remained around ninety beats per minute, and the respirations were never far from normal. It was evident that there was a disturbance of the heat controlling centers, but why or how has never been determined. The patient subsequently was discharged as cured, left the state and on writing to the doctor more than a year later claimed she had no further trouble whatsoever.

This electrical worker will WIN——

He starts the Fall with the famous Croft Library at his elbow.

What they contain:

Volume One—Practical Mathematics, 358 subject headings. Tells you how to use mathematics as a tool.

Volume Two—Practical Electricity, 1,000 subject headings. The basic principles of all electrical practice.

Volume Three—Practical Electricity, 1,100 subject headings. A continuation of Volume Two.

Volume Four—Electrical Machinery, 1,400 subject headings. Contains what every electrical man wants to know.

Volume Five—Central Stations, 509 subject headings. All phases of central-station operation are covered.

Volume Six—Wiring for Light and Power, 1,700 subject headings. Tells how to do the big and little jobs right.

Volume Seven—Wiring of Finished Buildings, 1,000 subject headings. The very meat of wiring practice.

Volume Eight—Practical Electric Illumination, 1,000 subject headings. Lamps, and the art of lighting properly.

Now Only

$19.50

In Ten Easy Payments

Easy to Hold
Easy to Read

These eight volumes are flexibly and strongly bound in dark red, with titles in gold. Size, 5 x 8 inches. Carry one or two volumes in your pocket for quick reference. With reasonable care, they will last a lifetime.

TERRELL CROFT knew what every ambitious man in the electrical field ought to have to help him move up to better-paying work, because he had been all along the line himself—from the job of apprentice to that of electrical engineer for a great electrical manufacturing company. When Croft finally entered upon his successful career as consulting electrical engineer, one of his most satisfactory undertakings was the preparation of these easily-understood, practical workshop books.

Croft put into these eight volumes just the every-day kind of information that you need and put it in such a way, with clear language and free illustration, that the great Edison says of the text, "It is one of the best I have yet seen."

Examine Free of Charge
Pay Only if Pleased

40,000 men have found this handy set of books, with their 3,000 pages and 2,200 illustrations, their greatest helper. If it were possible to compute the increased earnings that have come from their study, it would amount to millions of dollars probably.

The evening hours of the months ahead give you your chance to make your set of the Croft Electrical Library a wonderful value. Don't delay. We want you to examine these wage-boosting volumes entirely free of obligation to buy unless they more than please. Just fill and mail the attached coupon.

McGraw-Hill Book Company, Inc.
370 Seventh Ave., New York

FREE EXAMINATION COUPON

McGraw-Hill Book Co., Inc., 370 Seventh Ave., New York

Gentlemen:—Send me the LIBRARY OF PRACTICAL ELECTRICITY (shipping charges prepaid), for 10 days' free examination. If satisfactory, I will send $1.50 in ten days and $2 per month until $19.50 has been paid. If not wanted, I will write you for return shipping instructions. (Write plainly and fill in all lines.)

Name .....

Home Address .....

City and State .....

Firm or Employer .....

Occupation .....

Digitized by Google

Original from UNIVERSITY OF CHICAGO

The Hour That Counts!

When you see a man putting in his noon hour learning more about his work, you see a man who won't stay down. He'll never be satisfied until he hits the top. And he'll get there!

In shops, factories, offices, stores, in every line of industry, men are holding splendid positions won through spare-time study with the International Correspondence Schools. To-day they are earning four or five times—yes, some of them *ten* times as much money as when they started.

Employers everywhere are looking for men who really want to get ahead. If *you* want to make more money, show your employer that you're trying to be *worth* more money.

For 31 years the International Correspondence Schools have been training men and women right in their own homes.

Thousands upon thousands of men have stepped up in just this way. More than 180,000 are studying now. Can you afford to let another hour pass without making *your* start toward something better? Here is all we ask—without cost, without obligation, just mark and mail this coupon!

INTERNATIONAL CORRESPONDENCE SCHOOLS
Box 6206-C, Scranton, Penna.

Without cost or obligation on my part, please tell me how I can qualify for the position or in the subject *before* which I have marked an X:

BUSINESS TRAINING COURSES

☐ Business Management	☐ Salesmanship
☐ Industrial Management	☐ Advertising
☐ Personnel Organization	☐ Better Letters
☐ Traffic Management	☐ Foreign Trade
☐ Business Law	☐ Stenography and Typing
☐ Banking and Banking Law	☐ Business English
☐ Accountancy (including C.P.A.)	☐ Civil Service
☐ Nicholson Cost Accounting	☐ Railway Mail Clerk
☐ Bookkeeping	☐ Common School Subjects
☐ Private Secretary	☐ High School Subjects
☐ Business Spanish ☐ French	☐ Illustrating

TECHNICAL AND INDUSTRIAL COURSES

☐ Electrical Engineering	☐ Architect
☐ Electric Lighting	☐ Blue Print Reading
☐ Mechanical Engineer	☐ Contractor and Builder
☐ Mechanical Draftsman	☐ Architectural Draftsman
☐ Machine Shop Practice	☐ Concrete Builder
☐ Railroad Positions	☐ Structural Engineer
☐ Gas Engine Operating	☐ Chemistry ☐ Pharmacy
☐ Civil Engineer	☐ Automobile Work
☐ Surveying and Mapping	☐ Airplane Engines
☐ Metallurgy ☐ Mining	☐ Agriculture and Poultry
☐ Steam Engineering ☐ Radio	☐ Mathematics

Name.....
Street Address..... 3-27-23
City..... State.....
Occupation.....
Persons residing in Canada should send this coupon to the International Correspondence Schools Canadian, Limited, Montreal, Canada.

SEND FOR THE INTERNATIONAL CATALOG

Our net price list. Full line of auto bodies and accessories for Fords at **Wholesale Prices.** Save big money on bodies by buying Direct from Factory.

FOR FORD—Prices from $27.85 up. Factory to consumer direct—Pay only One Profit
International Body Works, 914 W. Ohio St., Dept. 4, Chicago, Ill.

MODEL MAKING

When you have made your Model Boiler, you will naturally wish to mount it with the best Steam Fittings obtainable. We can supply accurately made miniature Steam and Water Gauges, Steam Valves, Pumps, etc., also finished Engines and Boilers suitable for Model boats and stationary purposes. Special work to order. Large illustrated catalog 20c (refunded on first order).

BATHE MFG. CO.,
Dept. 2, 5214 Woodland Ave., Phila. Pa.

From the above cases it is seen, therefore, that one cannot diagnose diseases by the thermometer alone; many other symptoms must be taken into consideration. Neither can we definitely state at what point on the Fahrenheit scale life will cease to exist. Some patients develop no increase of temperature whatever when they pass the Great Divide; others exhibit an extremely high fever. There is no point of definite demarkation.

WHAT HAPPENS IF THE ROOM TEMPERATURE IS INCREASED

In the graph on this page we show the effect of high temperatures on the human body in actual tests made by the U. S. Bureau of Standards, under the Division of the Bureau of Mines of the Department of the Interior. It will be seen that the zero on this graph represents the normal body temperature, and an increase of 3° was recorded in test conditions in cases where still air or moving air of 100° F. surrounded the subjects of the test. Even at a temperature of 95°, more than 2° F. rise in temperature was exhibited. Under these test conditions, and remaining at rest in the room, having a temperature of 95°, the body temperature was increased; the pulse rate increased; sweating was very profuse, the clothes being saturated with perspiration. Dizziness was experienced and an increase in depth and rate of respiration was found. Chilly sensations were developed in some subjects. If the air in the room were agitated, there was a slight rise or no rise in temperature, with a corresponding action on the part of the pulse. Sweating was profuse, but not sufficient to wet all clothing. No other untoward symptoms were produced.

IN A ROOM AT 100° F.

At 100° F. the following effects took place. The temperature of the body increased, reaching even 102.3° F., which is 2.3° higher than surrounding air. The pulse-beats varied and in some cases were 152 to more than 183 in others. Sweating was very profuse, the shoes being partly full of water. The test was very trying, dizziness and weakness being present, which symptoms lasted for about an hour after the test. Even at high air velocities there were no beneficial effects from the rapidly moving air at this temperature. One can readily understand why some subjects collapse when the thermometer registers 98° in the shade. All subjects agreed that but little work can be done at a temperature of 100° F. If the subjects had remained at this temperature for one full hour, they were positive that absolutely no work could have been done at the expiration of the time. Electric fans, therefore, although of value in temperatures up to 95° (which heat we seldom experience), would have very little beneficial effect if the air surrounding us were maintained at 100° F.

Luminous Water Signs

(*Continued from page* 452)

part has been bent into a sinuous form, as shown in the illustration. Above the bent tube another tube puts it in communication with the atmosphere, so that air enters being aspirated by the liquid drops, on exactly the principle used in water air pumps. The liquid arriving at the base of the bent tube gathers itself together, and by capilliarity is attracted to the walls of the tube, and forms thus a little cylinder with a concave meniscus at each end, and imprisoning between itself and the adjoining cylinder a little bubble of air more or less voluminous A siphoning effect is produced, and what we may term a string of beads, is already formed within the circle of the glass tube, and in the vertical tube following it, fall by their own weight, drawing with them the bubbles of air separated by the cylinders of water and keeping the whole progressively in motion. The formation of the current of water and air, is continuous; no matter how long and curved the tubes may be, the alternation of water and air in this beadlike formation persists. As the drops reach the outlet of the tube, they are permitted to escape into the waste pipe if they are ordinary water. If on the contrary, they are composed of any colored liquid, it would be waste to let them escape, so they are collected in a bottle if the apparatus is very small, or in a tank if the apparatus is large, and various arrangements can be made for raising the liquid back to the original level for distribution. A small pump actuated by hand is sufficient for quite large installations. An automatic pump operated electrically, is of course, superior.

These liquid drops circulating in the tubes properly bent, and of proper design to carry out the *motif*, if it may be so termed, are illuminated obliquely by concealed lights, either on one side or on both. The meniscus of the water beads on account of their form, act as concave mirrors and concentrate the light which strikes them from the right and the left, the impinging light producing luminous points, much more brilliantly illuminated than the liquid of the beads or the air of the bubbles separating them, and whose luminous effects change constantly on account of their continual movement, all of which, combined with their alternation of direction of motion in the different juxtaposed tubes, produces the effect of scintillation comparable to the refraction seen in the case of precious stones. There is another effect of the most curious order, the letters and design seem to take very varied movements and effects of deformation, of trembling, of rotating, etc.

The effect is sufficiently artistic for the process to be valuable for decoration as well as advertisement.

The general design of the advertisement, both luminous and other portions of it, must not be kept in use too long, or else it will become monotonous and cease to attract the public.

In the process which we have explained, the effect is due to the design. It is enough to replace the screen to obtain a completely new effect, which only takes a few minutes.

In some animated pictures it is possible to imitate jets of water, fountains in action, and waterfalls in the middle of picturesque country scenes. These designs can be indefinitely varied.

Finally, as a matter of some importance, the expense incidental to obtaining this effect of water in motion, is practically negligible.

The luminous sign of whatever description, whether animated or intermittent, such as has been used up to date, is exclusively adapted to the exterior of a store. It follows that this kind of sign will not attract the eyes of the passers-by, except around the store, while it is much more important to attract them to the objects which it contains, or to attract the attention of the persons detained by curiosity before the window.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

Selenium Star Photometer

By LEWIS J. BOSS

(*Continued from page* 461)

In using the selenium photometer to determine the periods of unknown variable stars a comparison star is selected, which is as near to the color of the star under investigation as possible and which is also known to be of a permanent brilliancy.

Betelgeuse, the conspicuous reddish star in the upper part of the constellation of Orion, is one of the most interesting subjects upon which the selenium photometer has been put to work. This star, whose period has never been accurately determined, has been under observation since 1919, and records have been kept of all readings obtained. These have now been reduced to a common scale and the result plotted as shown in Fig. 5. Just above is shown a curve of the late Professor Barnard's naked eye comparisons of Betelgeuse with the star Aldebaran. In this curve note that the zero line is representative of the visual brightness of Aldebaran, or, as it is known to astronomers, $^{\alpha}$ Tauri. All deviations above or below this line indicates that Betelgeuse ($^{\alpha}$ Orionis was at the time shown so many tenths of a magnitude above or below $^{\alpha}$ Tauri). The star is then the comparison star. It is particularly fortunate that this star was used as a comparison star in the curve shown, since the same one was used as a standard for the selenium photometer. In the lower curve the abscissae are the millimeters of galvanometer deflection produced by the varying light of $^{\alpha}$ Orionis being impressed upon the sensitive selenium cell. The ordinates are in this case, as in the curve above, representative of elapsed time. The full line extending completely across the graph at abscissa 15.25 is the deflection produced by the standard star, $^{\alpha}$ Tauri. Deviations above or below this line indicate, just as in the curve above, brilliancies greater or less than that of the comparison star. From a careful study of the two curves it appears as though the selenium photometer was about to realize the goal of the astrophysicist, that is, the possession of a device would depend wholly upon physical methods for the determination of stellar magnitudes.

Not only is the new photometer useful in observing stars known to be variable, but it will also undoubtedly prove to be of inestimable value in settling questions of debated variability (i. e.) whether the light of certain stars really does vary a small amount or whether they shine with a steady effulgence, as well as being useful in determining the periods of maximum and minimum brilliancy of that large class of variable stars, the irregular variables.

In the development of this method of investigation, the idea has been, primarily, to adapt a piece of apparatus to the measurement of variable stars, which apparatus would eliminate so far as possible some of the difficulties attendant upon other methods. In doing this care has been taken to consider the errors likely to occur and to eliminate them in so far as it is possible to do so. They have, at least in the present form, been reduced to a minimum. The precision attainable with the selenium photometer has not yet been prosecuted to its fullest extent, nor have enough numerical results been tabulated to indicate what additional contributions are to be expected from the use of this instrument in variable star photometry. A line of work most promising for workers with the selenium photometer is that of the study of the irregular variables of long period, many of which have never yet had a reliable period assigned to them. Such use will result in the addition of considerable information to the scanty knowledge now available concerning them.

Construction Day by Day

So great and so constant is the growth of demand for telephone service that the Bell System invests throughout the country an average of three-quarters of a million dollars every working day for new telephone plant.

New aerial lines are always under construction or extension, new subways are being dug and cables laid, larger building accommodations are under way, more switchboards are in process of building or installation, and added facilities of every description being mustered into service to care for the half million or more new subscribers linked to the System every year.

This nation-wide construction, this large expenditure of funds, could not be carried out efficiently or economically by unrelated, independent telephone organizations acting without co-operation in different sections of the country. Neither could it be carried out efficiently or economically by any one organization dictating from one place the activities of all. In the Bell System all the associated companies share common manufacturing and purchasing facilities which save millions of dollars annually. They share scientific discoveries and inventions, engineering achievements, and operating benefits which save further millions. But the management of service in each given territory is in the hands of the company which serves that territory and which knows its needs and conditions.

By thus combining the advantages of union and co-operation with the advantages of local initiative and responsibility, the Bell System has provided the nation with the only type of organization which could spend with efficiency and economy, the millions of dollars being invested in telephone service.

AMERICAN TELEPHONE & TELEGRAPH CO. AND ASSOCIATED COMPANIES — BELL SYSTEM

"BELL SYSTEM"

AMERICAN TELEPHONE AND TELEGRAPH COMPANY

AND ASSOCIATED COMPANIES

One Policy, One System, Universal Service, and all directed toward Better Service

An Open Letter to Agents and Salesmen



Do you want to increase your earning power fifty to seventy-five percent with less effort than you are now putting forth in what you are selling? Let us convince you.

We manufacture, and have for a number of years a Kerosene Burner for Cook stoves, heaters, furnaces, etc., which is installed very easily. We claim that this Burner is superior to any burner on the market today, and we are ready to back up our statements. In reality this burner generates gas, which makes a white intense flame. Such heat eliminates all smoke, dirt and ashes.

Whether you live in the country or city, your prospects are unlimited. They are fifty percent sold before you start to talk. What is easier to approach a prospect on than the subject of heat, also the increasing price of coal against the over-production of oil and the efficiency of burning oil, which is proven to be thirty-five percent more efficient than soft coal. Don't hesitate. Write today for our free booklet describing our product more fully. Selling terms, commission, and territory. Private individuals will receive prompt attention.

Even Heat Generator Company 718 West Jacks
Dept. A, Ch

Digitized by Google
Original from UNIVERSITY OF CHICAGO

ULTRALENS MICROSCOPE

Enormous Magnification at One-Twelfth Usual Cost

TYPE MS-11 $5.00

Magnifies 225 Diameters or 50,625 Times Surface Area

The ULTRALENS microscope is a practical instrument made possible by the recent development of a new system of lens construction on which various U. S. and Foreign patents are pending. Powers from 125 to 325 diameters (15,625 to 100,625 times surface area) are available. Microscope is a marvel of simplicity, perfection, and compactness. The enormous magnification and clear definition is a source of considerable astonishment to new users, who do not see how they can be sold at such a low price.

The MS-11 type is a complete outfit as it includes everything necessary to conduct numerous experiments. A 225 diameter objective is standard equipment. Extra ULTRALENS objectives of either 125 or 325 diameters can be furnished for $1.00 each. Objectives are not sold separately.

This type of ULTRALENS microscope is well finished and a quality instrument throughout. Stage, knob, and mirror casing are of black moulded bakelite. Brass work finished in gold lacquer. Diecast enameled horse-shoe base. Micrometer screw focusing adjustment. Objectives are interchangeable and plug in top of pillar. Outfit furnished in brown moulded bakelite, which is provided with places for holding slides and extra objectives. By means of a special attachment microscope can be securely clamped to outside of box, thus making it serve as a sub-base.

Every microscope guaranteed to be as represented and to do all we claim. Must be seen to be appreciated. The three photomicrographs at bottom of ad. show how objects appear when viewed through our instrument.

THE MICROSCOPE is one of the most interesting devices known. It creates nothing new, yet it reveals marvels. It increases the power of the human eye a thousand-fold. It shows us the marvels and beauty of infinite worlds whose existence we never suspected. By its aid we can see a world of living things in a drop of stagnant water. We can see living forms in the blood, fighting their battles before our eyes. The smallest insect or part thereof can be increased to a frightful size. The uninteresting thing to the unaided eye, when examined under a microscope becomes a source of wonder and astonishment.

Any microscope can be used for studying the wonders of Nature. A power of 200 diameters is the best for average use. Ordinarily an instrument of this power is beyond the reach of the person of average means. However the advent of the ULTRALENS microscope has changed all this. It brings an instrument of 125 to 325 diameters within the reach of everyone.

Every schoolroom, home, shop, store, and office should have a microscope. In the hands of the growing boy or girl they are an education in themselves. We are just beginning to realize the possibilities of the microscope. First, a positive method for general use to detect adulterations and impurities in materials. And secondly, to discover variations from standards. Only a very minute quantity of material is required for testing. The human eye is easily fooled, while the microscope reveals definite results leaving nothing to be assumed. In-numerable uses will quickly suggest themselves in one's own particular line.

EVERY SCHOOLROOM, HOME, SHOP, STORE, AND OFFICE HOLDS A PROSPECT.
ATTRACTIVE APPEARANCE AND PROVEN MERITS MAKE IT A RAPID SELLER.
FOR JEWELERS, OPTICIANS, AND DRUGGISTS.

TO DEALERS, JOBBERS, AGENTS, AND SALESMEN—GET OUR DISTRIBUTORS' PROPOSITION.

Extremely Interesting Circular S. I. Sent on Request

SCIENTIFIC APPARATUS CORP., MILTON, PA.

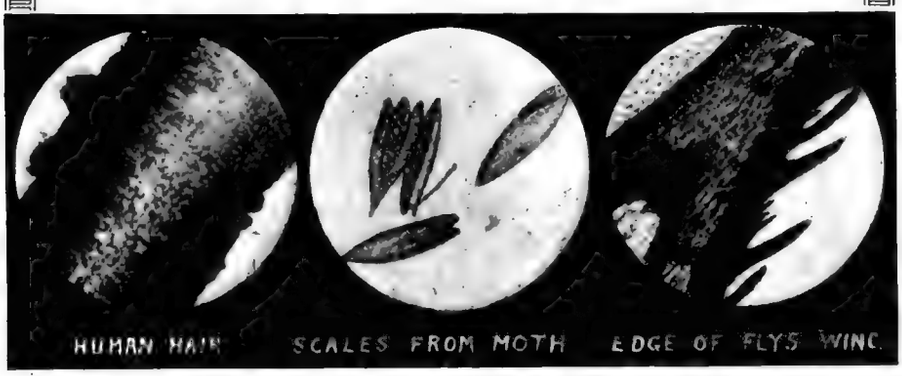

NEW AND POPULAR BOOKS

EVERY RADIO ENTHUSIAST SHOULD HAVE THESE BOOKS

Wireless Course in 20 Lessons

By S. GERNSBACK, A. LESCARBOURA and H. W. SECOR, E.E. (12 Edition)

A Course that tells you everything you wish to know about "wireless," starting lesson No. 1 by explaining the Principles of Electricity. By simple, easy stages, this wonderful Course takes you into "Wireless" by the use of simple language so skillfully used that you understand every word. There is a lesson devoted to Theory and Mathematics. The last lesson is devoted to a history of Wireless.

This Course has been considerably revised in order that it meet many important changes which have occurred in Radio Telegraphy and Telephony within recent

...book is 6 x 9 inches, 284 pages, 500 illus... diagrams and photographs.
...: **black leatherette semi-flexible cover,** ...mped, **red edges, round cor-** ...d jacket **$2.00**

The How and Why of Radio Apparatus

By H. W. SECOR, E.E.

This newest book on radio matters fills a distinct gap in wireless literature. While the treatment is made as understandable and as free from mathematics as possible, it at the same time incorporates a wealth of technique and instruction for the Radio Amateur—the Radio Operator—the Installation and Designing Expert—as well as teachers and students of the subject in general.

A very broad field has been covered by the author, giving a great amount of information not found in other text-books. If you are engaged in any branch of the Radio or allied arts you will surely need this latest contribution to radio literature.

This newest of Radio Work has 160 pages, 6 x 9 inches. Hundreds of illustrations and tables.
Cloth bound in Vellum de Luxe, stiff covers, hand-sewed, gold stamped, each **$1.75**
Same book, limp binding, colored sewer **$0.75**

DEALERS—ASK FOR WHOLESALE DISCOUNT

...TER PUBLISHING CO., Inc., **53 PARK PLACE, NEW YORK**

Variable Stars

(*Continued from page* 490)

servations must be completed before the law governing them is recognizable. A typical star of Class 3 is Eta Argus, which is visible only from the southern hemisphere. In 1843 it blazed up until it rivaled the brilliant Sirius. Since that date it has confined itself to insignificant fluctuations which give the impression of the smouldering before the flame. Other examples are two stars in the northern hemisphere, one designated "R" in the constellation of the Shield, the other "R" in the Northern Crown. They fluctuate between fifth magnitude and utter invisibility through the most powerful telescopes. The spectra from maximum to minimum undergo radical changes seeming to indicate that the stars pass through tremendous physical transformations. Variables of Class 4 rise rapidly to maximum, where they halt, then return to minimum. Others experience several minima during a light cycle, the brightest of which is called the primary and the others secondary. (See illustration 1, Fig. B.) The periods are often extremely short, in several cases being only a fraction of a day. It is not an unusual occurrence for a star to double its light in ten minutes.

Scientists are always delighted to state definitely the cause of abstruse phenomena. A discussion of the first four classes of variables must necessarily deal in speculation but the Class 5 variables are no longer a mystery. The discovery of the forces which operate the fluctuations of these stars is one of the greatest triumphs of man's mind. Algol, which is the best known example of the type, remains at maximum, second magnitude, most of the time; loses 5/6 of its light in 4½ hours; remains at minimum 20 minutes; returns to maximum in 3½ hours. (See illustration 3.) The cause is simple. The spectroscope shows that a darker body revolves around Algol and periodically eclipses its light. The companion has never been seen; yet astronomers state with confidence that it is 840,000 miles in diameter, and is separated from Algol by a distance of 3,250,000 miles. Algol is 1,160,000 miles in diameter. The combined mass and the density of the system are respectively 2/3 and 1/5 of our sun's. The discovery of Algol's companion gave the clue to the existence of the black stars, "which fling unseen through the vast reaches of sidereal space."

Star Clusters

By BASIL NEWCOMB

(*Continued from page* 438)

Such are Orion, the Scorpion, the Big Bear. Somewhat more condensed, and also actual clusters, are the Hyades and the Pleiades; and from them we can go by gradual steps to the globular clusters, such as Messier 22 which is shown in the accompanying photograph, and to even more highly condensed systems like the great cluster in Hercules.

Messier 22, at a distance of 27,000 light-years from the earth, is a globular or slightly flattened system containing perhaps fifty thousand stars. The diameter of the cluster is more than three hundred and fifty light-years. A comparison with regions in the neighborhood of the sun shows that the stars of Messier 22, all of them so-called giants, are much more closely packed in their region of space than are the stars near the sun, as a glance at the accompanying photograph would lead one to suspect. In globular clusters there are hundreds of stars in the amount of space which near the sun contains but one.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

A SIX MONTHS' SUBSCRIPTION *For Only* **25c**

(This is ½ the regular price)

An Army of Boys

more than 400,000 strong

are regular readers of THE BOYS' MAGAZINE. This army is gaining recruits every day because this splendidly illustrated magazine contains just the sort of reading every red blooded American boy wants. The very best stories, both serial and short, by the world's best writers. Special departments devoted to Radio, Mechanics, Electricity, Athletics, Physical Training, Stamp Collecting, Amateur Photography, Cartooning, etc., etc. Beautiful big pages with handsome covers in colors. A big lot of jokes and comic drawings.

We give away $132.00 in Cash Prizes for the best amateur short stories, drawings, cartoons, articles or radio, mechanics, electricity, etc. There is no reason why your boy should not win some of these Cash Prizes. These Prize Contests are continuous and each issue of THE BOYS' MAGAZINE gives full particulars regarding them.

Just think of it! A SIX MONTHS' subscription for only 25 CENTS. Surely you would like to invest this small amount in giving your boy, or boy friend, six solid months of pleasure, entertainment and instruction.

Remit in stamps if more convenient.

(On sale at all newsstands 10c a copy.)

THE SCOTT F. REDFIELD CO., INC.,
7228 Main St., Smethport, Pa.

I enclose 25 cents for a six months' subscription to THE BOYS' MAGAZINE as per your special half price offer. Enter my subscription promptly and send me my first copy of THE BOYS' MAGAZINE by return mail.

You agree to return my 25 cents at once should I not be more than pleased with THE BOYS' MAGAZINE.

My Name is .....

My Address is .....

(Please write plainly)

ONLY $3 DOWN Brings You a Genuine UNDERWOOD

Latest model. Genuine Shipman-Ward Rebuilt. All worn type replaced with new ones. In appearance, style, class of work and length of service it will give, it compares exactly with a brand new machine. Listed far below factory prices. Guaranteed full five years. Unexcelled easy payment proposition.

FREE Book Tells How!

Send the coupon below for free copy of our big typewriter book giving inside facts about our famous rebuilding process. Full illustrations. Every step explained. Get your copy today. Shows you how we can save you real money. Write now. There is no obligation.

Shipman-Ward Mfg. Company Chicago

Shipman-Ward Mfg. Co.
2166 Shipman Bldg., Chicago
Please send me a copy of your big typewriter book as illustrated and described above.

Name .....

Street and No. .....

City ..... State .....

Tantalum---All About It

By O. IVAN LEE, B. Sc.

(*Continued from page* 447)

be dissolved from a tantalum cathode leaving it unaffected. Caustic alkali solutions and in general all water solutions of chemicals (with the single exception noted above) are without action upon it, so that it is acknowledged the most resistant of all metals to wet corrosion.

One of the earliest uses to which commercial tantalum was applied was in the production of electric lamps, and apropos of this, one should note the great ductility of the material. A bar of tantalum as thick as the finger may be drawn into fine wire for filaments without heat treatment during the process. The strength of wire thus made is more than that of copper, nickel or platinum, but less than that of molybdenum and tungsten.

Since tantalum expands at nearly the same rate as platinum, like that metal, too, it may be sealed into glass. This property, of course, is very useful when it is necessary to lead an electric current into a glass vessel.

THE UNIQUE ELECTRICAL ATTRIBUTES OF TANTALUM

To begin with, the electrical resistance of tantalum is about eight times that of copper and about three times that of tungsten. This, however, though interesting, is not likely to cause it to displace cheaper materials already in use. It is the unique characteristics of a new material that set inventors to work to apply them to useful purposes.

Since tantalum when heated, eagerly combines with the common gases oxygen, hydrogen and even inert nitrogen, this very obstacle besetting the preparation of the metal becomes a most valuable property when, for example, tantalum is heated in a vacuum tube such as is used in the radio telephone. Thus it may be made to maintain a balance of residual gas suitable to the best conditions for transmitting or receiving. It is, however, the peculiar valve properties of tantalum which hold forth great promise of possibilities in applied electricity.

Suppose two polished sheets of tantalum are immersed in sulphuric acid of the strength used in storage batteries, and connected with a battery circuit of 75 volts. For an instant the current flows as with any ordinary metal, and then it suddenly trails off to a minute fraction of the original value—perhaps the thousandth of an ampere. Simultaneosuly, a rainbow film covers that piece by which the current enters the acid.

If now a plate of lead is substituted for one of tantalum, and the cell connected to an *alternating* current of the usual frequency, the current flow in one direction will very nearly be suppressed, resulting in a *pulsating direct* current. Part of the electrical energy is expended in electrolytic decomposition of the water into hydrogen and oxygen, the former appearing at the tantalum electrode while the latter is evolved at the lead. The current thus derived may be used to charge a storage battery, for electroplating or any similar purpose.

It is even possible by using two tantalum electrodes, so to rectify an alternating current that both halves of the waves are made to pass in the same direction, and then manipulated finally to become a smooth unidirectional current.

The leakage of electric tantalum valves varies under the conditions of the apparatus utilized, voltage, nature of electrolyte, current density, etc., but by reason of the great

Invention Now Taught

Great Inventors Now Show You How to Make Your Ideas Pay

Thousands of inventions are needed today. Just one little idea can bring you fortune and fame. The world is waiting for new inventions in engineering, chemistry, household articles, radio, and other fields—and will pay big money for even the simplest idea. Little things like the tin bottle cap, the crimped hair-pin, the rubber on the end of a pencil brought their inventors hundreds of thousands of dollars. Couldn't you make some equally simple invention? Haven't you ideas that could be turned into money? Inventing isn't a matter of blind luck—it isn't a question of guesswork. Invention is based on certain principles, just as any other profession. It follows a definite course of procedure step by step from the origination of the first idea to its final development on a commercial scale.

RAYMOND FRANCIS YATES

Learn at Home in Spare Time

Hitherto, every inventor had to work out these principles of invention for himself. For every successful inventor knows and uses these principles. He knows WHAT TO INVENT, HOW TO INVENT, HOW TO PROTECT HIS RIGHTS AND HOW TO MARKET HIS PATENT OR INVENTION. But now you can learn in a few months what it took great inventors years of discouragement and terrific struggle to acquire. Fifteen famous inventors have now revealed, for the first time, the secrets of invention. They explain how to originate ideas, how to develop and perfect your ideas, how to patent your inventions, and how to sell them to your best advantage. In short, they make it amazingly easy for you to become an inventor, simply by learning the whole wonderful science of invention, step by step, from beginning to end. It requires just fascinating moments of your spare time at home.

First Course of Its Kind

This is the first course in practical Invention that has ever been devised. Now you can take Edison's advice and actually learn HOW TO INVENT—how to make Invention a profession! In simple, easy-to-understand language, you are told how successful inventors work; you learn how to use the secrets of invention that convert a simple little idea into money.

FREE New Book on Inventive Science

A wonderful new book has just come from the press that tells all about the Science of Invention; that shows how great inventors work, how little ideas have made fortunes; how you, too, can easily learn the secrets of successful invention. This fascinating Book will be sent free to all those who are genuinely interested. Send for this Book today, as only a limited number are available for free distribution. Write your name and address on the coupon below, or send a post card NOW! There is no cost or obligation. This bureau is not connected in any way with patent attorneys or manufacturers. We do nothing but teach the science of invention.

BUREAU OF INVENTIVE SCIENCE
Dept. 79, Wisner Building, Rochester, N. Y.

Bureau of Inventive Science, Dept. 79
Wisner Building, Rochester, N. Y.

Please send me your free book, "The Science of Invention."

Name .....

Address .....

City .....

State .....

Digitized by Google Original from UNIVERSITY OF CHICAGO

The Fibre "RICOHORN"

WITH TUNED LOUD SPEAKER PHONE

Eventually Replaces All Other Radio Horns Because it is a scientific development which produces only true mellow tones.

Indestructible, Seamless. Made entirely of fibre, metal base.

This presents the latest development in loud talker horns. It has been realized by every acoustic expert that metals should never be used in connection with loud talkers, as they give rise to "metallic" sounds.

"Ricohorns" are made entirely of fibre. No metal is used at all, the sounds come through not only mellow and undistorted, but, due to the higher amplifying power of fibre much louder as well. "Ricohorns" are unbreakable. Cannot be dented and do not lose their shape. By means of an ingenious arrangement, the 'Phone is clamped against the lower extremity of the "Ricohorn" in such a way that no echo pockets are formed. Consequently there is nothing lost in the emission of the sounds. The "Rico" Loud Speaker 'Phone can be dismounted, if desired, in less than a minute's time.

The finish and material of our horns are of the highest grade throughout. The base to which the horn is attached is of metal. The horn itself has a beautiful black mottled appearance, which lasts practically forever. The base is finished in the same black finish. "Ricohorns" are put up in strong corrugated cardboard boxes and we insure safe delivery.

Send for illustrated circulars on all "Rico" Radio Specialties.

SOLID FIBRE HORN

No. 111 — (Illustrated) Fibre "RICOHORN", with "Rico" Loud Speaker 'Phone, height 23", bell 10". each..... **$8.50**

No. 01—Fibre "RICOHORN", height 28", bell 14". each..... **$15.00**

Both complete with the "RICO" TUNED Loud Speaker 'Phone and Cord.

RADIO INDUSTRIES CORPORATION

131 Duane Street New York, N. Y.

SEND NO MONEY

RADIO INDUSTRIES CORPORATION S.&I.-9
131 Duane Street, New York

Gentlemen:—Please send me by Parcel Post one No. ..... Fibre "RICOHORN" for which I will pay the postman the amount of ..... plus postage.

You guarantee that the Fibre "RICOHORN" is exactly as represented by you.

NAME .....

STREET AND NO. .....

City ..... STATE .....

PATENT APPLIED FOR

THE FAVORITE RADIO CABINET

makes a high class Radio Instrument. It operates any good hook-up.

With one vacuum tube it operates a loud speaker. No loop, no aerial, no ground, or other attachments necessary. It fills all vacancies.

THE FAVORITE has won the heart of the nation. Everybody who see it, want one and those who have the price, buy one.

It is a beautiful piece of household furniture and adds to the appearance of the finest home.

A FAVORITE in operation on the floor of a dealer attracts all the attention of his customers. Write for descriptive matter and prices.

Manufactured by

G. A. BARTHOLOMEW

409 GUARDIAN BLDG. CLEVELAND, OHIO

Big 3-Ft. Telescope

Useful and Entertaining (In Five Sections)

See people and objects miles away, on land or sea, as if they were close. Wonder Telescope gives new pleasures to home, farm, camp, travel, sport. See moon and stars as never before. Opens out over 3 feet long; measures 12 inches closed. Brass bound; has powerful lenses. **Thousands pleased**—"Could tell color of aeroplane 4 miles away."—Mrs. Yarbrough. "Saw Provincetown Light, 28 miles away, as clear as if in front of me."—Clyde Scribner.

CLIP THIS AD

SEND NO MONEY

SPECIAL OFFER! While they last

"I have been watching submarines 3 miles ..."—P. Grush. "Can see ... in school yard 6 ... H. Renning- ...mbers on ...way.

Because of a fortunate purchase from a large European manufacturer we can give you a big bargain. Be first in your neighborhood; entertain your friends. **Send no money;** send only name and address for telescope complete by parcel post. On arrival deposit with Postman only $1.85 plus a few pennies postage. **Satisfaction guaranteed** or money refunded. Order **today** while the supply lasts.

FERRY & CO., 75 W. Van Buren St. Dept. 1253 Chicago, Ill.

inertness of tantalum towards chemical solution of all kinds, *the electrodes of this marvelous metal are practically indestructible.* This is not the case, however, with valve apparatus constructed of aluminum or magnesium which, although capable of rectifying, soon disintegrate from chemical action. The efficiency of a unit for charging an ordinary storage battery is in the neighborhood of 33⅓%, comparing favorably with other types of rectifiers.

The tantalum rectifier is noiseless, devoid of moving parts and needs no attention except occasional replenishment of water.

THE FUTURE OF TANTALUM

It has been stated by Mr. Wells that "scientific prophecy will not be fortune-telling, whatever else it may be," so that it is with a feeling of considerable reluctance that one ventures to make any predictions concerning the probabilities of a metal so new to us as tantalum. It is, however, a strange and significant but consoling fact, that the useful metals seem to occur with an abundance nicely adjusted to the demands made upon them. A world in which mercury was worth as much as iridium (of which we have scarcely enough to tip our fountain pens), would be unthinkable, but at 90c per pound there is no complaint. Russia's single experiment in platinum coinage demonstrated again the folly of any metal save gold as a monetary standard. Soon after vanadium created an insistent demand for itself, a providential hoard created by some freak of geology was uncovered at a height of three miles in the Peruvian Andes. About the time that the advantages of zirconium oxide were appreciated, thirty ton boulders of it were discovered lying ready to move on the highlands of Brazil.

SUMMARY SUGGESTIVE OF THE DIVERSE POSSIBLE APPLICATIONS OF TANTALUM

Mechanical

Pen (nibs): elastic, hard, non-rusting.

Watch and Clock Springs: By alloying with carbon, silicon, boron, aluminum, tin, titanium.

Tools: Such as anvils where points and surfaces are subject to mechanical wear. Case hardening may be obtained by addition of oxide, aluminum, titanium, tin, silicon.

Cutting Tools: Knives, etc.

Dental Purposes: Pins for Teeth, instruments, non-rusting, can be sterilized, sharpened, possess hardness equal to agate.

Surgical Instruments: Non-rusting, can be sterilized, sharpened, possess hardness equal to agate.

Jewelry: With gold or copper, an alloy having appearance of gold but harder and more elastic.

Steel Industry: Alloy with iron, tungsten, molybdenum.

Alloys: With molybdenum as substitute for platinum; with tantalum 10, nickel 10, iron 80—tough, elastic, hard; with silicon (1-10%), an alloy of great hardness.

Chemical

Colors: Olive green and orange pigments were described and recommended in 1801 by Hatchett. It is the earliest recorded suggestion for the utilization of tantalum—(columbium.)

Refractory: Tantalum oxide is well adapted for withstanding high temperatures.

Standard Weights: Permanent, hard, economical.

Platinum Substitute: Cheaper, in some respects superior and releases platinum for indispensable purposes.

Chemical Apparatus: Crucibles, dishes, etc. Ideal if not subjected to too high a temperature.

Chemical Manufacture: Of sulphuric acid, replacing platinum for sprayers in the acid chambers; possess great durability.

Alloy: Of zircon 6.8%, columbium 53.5%, tantalum 39.7%, not attacked by any acid; can be heated to whiteness without oxidation.

Electrical

Filament: For incandescent electric lamp.

Wire: For electric heaters and resistance furnaces; for current leads into glass bulbs.

Sheet and Gauze: For radio tubes, X-ray tubes, electrolytic detectors, lightning arresters.

Plates: For electrolytic condensers, valves and rectifiers, anodes and cathodes for deposition of metals such as silver, copper, gold, platinum, nickel, antimony and especially zinc and cadmium with which tantalum does not alloy. Has advantage over platinum of greater rigidity, lower density and cost and allows of all metals plated being removed by treatment in acids.

Magnetic Alloy.

Non-magnetic Alloy: With nickel.

Digitized by Google Original from UNIVERSITY OF CHICAGO

In this Department we publish such matter as is of interest to inventors and particularly to those who are in doubt as to certain Patent Phases. Regular inquiries addressed to "Patent Advice" cannot be answered by mail free of charge. Such inquiries are published here for the benefit of all readers. If the idea is thought to be of importance, we make it a rule not to divulge all details, in order to protect the inventor as far as it is possible to do so.

Should advice be desired by mail a nominal charge of $1.00 is made for each question. Sketches and descriptions must be clear and explicit. Only one side of sheet should be written on.

NOTE:—Before mailing your letter to this department, see to it that your name and address are upon the letter and envelope as well. Many letters are returned to us because either the name of the inquirer or his address is incorrectly given.

CARBIDE GAS ENGINE

(727) Robert Smith, Plentywood, Mont., asks for patent advice on a gasoline engine using carbide gas for the exploding agent.

A. There is no reason why carbide gas could not be used in automobile engines to run them, neither is there any reason to presuppose that any other inflammable gas will not explode when mixed with air or oxygen. Inasmuch as you have not changed the construction of the internal combustion engine in order to make it operate with carbide in any detail, we doubt if you could patent the use of a particular kind of gas in connection with the engine. We disagree with you as to the efficiency and economy of this system. Carbide gas is more expensive in its practical results than gasoline, and except for starting motors on cold days, its use would be undesirable.

We would suggest that you work along this line, namely, that you design a carbide gas generator which will supply gas to the engine when the same is cold, so that it can be started much more easily. Then the carbide gas flow should be stopped and gasoline be supplied in the usual manner. Some system whereby just a few drops of water will fall on the granules of the carbide, to give enough gas to start the engine only, would be most feasible.

BATTLE PLANE

(728) Constant A. Shilcoski, Detroit, Mich., desires to patent an airplane in which machine guns are mounted at the ends of the wing structures, operators being located there.

A. Do you not think that the world has had enough of war for the time being to satisfy it for at least twenty or thirty years? If so, then naturally, it would be absurd to suggest applying for a patent for your device. There probably will be no more war for at least twenty years—consequently any war inventions, or any war suggestions, are worthless, and at the end of the seventeen year period would afford no protection to the inventor. Even then, equipping your airplane with two machine guns, on port and starboard, in special housings, which guns are free to move in any direction, necessarily means that the operators of the machine-guns cannot operate the plane. Consequently, when a plane of this nature is sent crashing to earth, there is a loss of five lives instead of one, or at the most, two. Firing the guns is not more directive or effective, and maneuvering an airplane with heavy bodies at the ends of the wing structure is more difficult while the speed of the airplane is decreased because of added wind resistance. We would not suggest attempting to patent this idea, nor any other war idea, unless of extreme importance.

FIRE DETECTOR

(729) Geo. J. Frankovich, Anaconda, Montana, asks whether he should patent a fire alarm system, in which a fuse is laid throughout the building communicating with an explosively operated switch, the fuse being of the type used for blasting purposes.

A. We most strenuously advise against attempting to patent such a device. In the first place, the setting off of the fuse requires that a flame come in actual contact with said fuse. This means that the fire will necessarily have had obtained considerable headway, which fire could be further spread by the burning fuse. The device is also impractical because of the fact that an explosive is used in actuating the mechanism of the same. Explosives cannot be sent out in the mails, making the devices useless for out-of-town buyers (unless express packages were sent). The resetting of the instrument likewise is quite expensive, when one considers the amount of fuse which has to be laid after each conflagration. We are positive that insurance and fire underwriters would not sanction this method, which, rather than being a detector of fires, would positively lead to complete combustion. Many other drawbacks will present themselves if you but think along any such lines.

SPARK GAP

(730) Eugene Feinberg, Fort Smith, Ark., asks whether he should patent a spark gap for radio purposes, a diagram of which he sent.

A. Without a doubt your device can be patented, but what will be the use? Today an open spark gap is not employed for radio but principally for automobiles and naturally experimental purposes. A patent upon your system with reference to its experimental value, would hardly be worth the expense. Within another year or two radio spark gaps together with much other trash with which radio was and is today infested will be relegated to the junk pile. All of these devices make historical material for readers interested in radio's romance. But to attempt to patent devices to be placed in the ranks of such historical works would be the height of folly. We, therefore, advise most strongly against attempting to secure a patent upon this scheme.

A LEGAL QUESTION

(731) Alfred First, Dongan Hills, New York, asks what could happen if he infringes upon a patent.

A. We do not profess to be legal experts. Questions such as this could only be definitely decided after the suit has been settled. However, this may occur:

If you infringe upon a patented article, and a suit is brought against you and the action is won, anything which you have or which may be coming to you as a result of this infringement, may be attached and all your personal belongings and properties with the exception of about $250.00 worth of property, real and personal, may be claimed by the concern who won the suit. Any money or moneys which you may have put into the manufacture, sale or exploitation of your device could be attached, and subsequent returns would come into the hands of the winner of the suit. The court then may enjoin you from manufacturing this device, and should you fail to heed the warning, a jail sentence is apt to follow.

U.S. PATENTS

Don't Lose Your Rights

Before disclosing your invention to anyone send for blank form "Evidence of Conception" to be signed and witnessed. A sample form together with printed instructions will show you just how to work up your evidence and establish your rights before filing application for patent. As registered patent attorneys we represent hundreds of inventors all over the U. S. and Canada in the advancement of inventions. Our schedule of fees will be found reasonable. The form "Evidence of Conception" sample, instructions relating to obtaining of patent and schedule of fees sent upon request. Ask for them,—a post card will do.

LANCASTER & ALLWINE

255 OURAY BLDG.,
WASHINGTON, D. C.
"Originators of form Evidence of Conception"

PATENTS

TO THE MAN WITH AN IDEA

I offer a comprehensive, experienced, efficient service for his prompt, legal protection and the development of his proposition.

Send sketch, or model and description, for advice as to cost, search through prior United States patents, etc. Preliminary advice gladly furnished without charge.

My experience and familiarity with various arts frequently enable me to accurately advise clients as to probable patentability before they go to any expense.

Booklet of valuable information and form for properly disclosing your idea, free on request. Write today.

RICHARD B. OWEN, Patent Lawyer
164 Owen Building, Washington, D. C.
2276-8 Woolworth Bldg., New York City

PATENTS TRADE-MARKS AND COPYRIGHTS

Before disclosing an invention, the inventor should write for our blank form, "RECORD OF INVENTION." This should be signed and witnessed and if returned to us together with model or sketch and description of the invention we will give our opinion as to its patentable nature. Radio and Electrical cases a specialty.

Our illustrated Guide Book, "HOW TO OBTAIN A PATENT," sent Free on request. Highest References Prompt Attention Reasonable Terms

FREE COUPON

VICTOR J. EVANS & CO., Patent Attorneys

Chicago Offices: 1114 Tacoma Bldg. Pittsburgh Offices: 514 Empire Bldg. Philadelphia Offices: 714-715 Liberty Bldg. San Francisco Offices: Hobart Bldg.
New York Offices: 1001 Woolworth Bldg.
MAIN OFFICES: 779 NINTH, WASHINGTON, D. C.

Name..... Address.....

Digitized by Google
Original from UNIVERSITY OF CHICAGO

UNITED STATES AND FOREIGN

PATENTS PROTECT YOUR RIGHTS

PATENTS

Any new article, machine, design or improvement thereof, or any new combination of parts or improvements in any known article which increases its efficiency or usefulness, may be patented, if it involves invention.

IF YOU HAVE ANY NEW IDEAS

which you feel are useful, practical and novel, *take prompt action toward protecting your rights.* If you have invented any new machine, or new combination of parts or improvement, or new process or design,

Send Drawing, Model or Description

of it for information as to procedure to secure protection.

WRITE TODAY FOR BLANK FORM

"Record of Invention"

to be returned to me with drawing, description or model of your idea. Promptly upon receipt by me of your idea I will write you fully as to procedure and costs.

No Charge for the Above Information

All communications are held in strict confidence. My personal, careful and thorough attention is given to each case. I offer you efficient, reliable and prompt service—based upon practical experience. *Higest references.*

Write today for free book *"How to Obtain a Patent."* This book will give you valuable information, and it may save you much time and effort. *Send for it NOW.*

My practice is devoted exclusively to United States and foreign patents and trade marks. Very probably I can help you. Write today.

CLARENCE A. O'BRIEN

Registered Patent Attorney

241 Southern Bldg. Washington, D. C.

CLARENCE A. O'BRIEN,
241 Southern Building,
Patent Attorney,
Washington, D. C.

Please send me your free booklet, *"How to Obtain a Patent"* and blank form *"Record of Invention"* without any obligation on my part.

HOW TO OBTAIN A PATENT

NAME .....

ADDRESS .....

(WRITE PLAINLY)

Dr. Hackensaw's Secrets

By Clement Fezandié

(*Continued from page* 436)

to whether space is a vacuum, or is filled with ether or with highly rarefied air or other gas, no balloon could ascend very high in it, as the density diminishes as we ascend. Hydrogen, the lightest gas known, would not carry us very far. Even if we were able to make a vacuum balloon, with concentric envelopes strong enough to resist crushing from the atmosphere, and if we dropped off one shell after another as we ascended, this balloon would have to be so large, to rise even a few hundred miles, that it would be impracticable to build it."

"Why so? A balloon, with no gas inside, ought to be very light."

"True, but at a height of one thousand miles above the earth, our atmosphere must be so rarefied that it would probably take thousands of cubic miles of it to weigh a pound. Consequently the problem would be to build a balloon thousands of miles long and weighing less than one pound. This would be a manifest absurdity. So we may dismiss the idea of a balloon as a means of traveling to the moon or to the planets."

"What is your opinion about the possibility of screening a body from the effects of gravitation. H. G. Wells uses this method for sending his first men to the moon. He places them in a car that is surrounded by shutters, which, when closed, are impervious to the attraction. By opening the shutter in the direction in which he wishes to go, the passenger lets in the attraction of the earth or the moon and the car starts off in the desired direction. When his speed becomes too great, he lets in a little counter-attraction from the opposite side, and so can regulate his speed and direction at will. What do you say to that idea?"

"The idea is certainly ingenious," observed Doctor Hackensaw with a smile, "but it is open to the objection that we have as yet found no means of shutting off gravitation, nor have we any data to lead us to believe that gravitation can be shut off. Of course, as yet, we do not know what gravitation is. Several unsatisfactory metaphysical theories have been advanced, but none of them satisfies me. As for myself, I cannot even make up my mind as to whether attraction is, as commonly believed, a pull between two bodies, or, what appears to me more probable, a push exerted on the two bodies from outer space, forcing them closer together. Analogy, however, would lead me to believe that gravitation, like heat, light, sound, electricity, &c., is merely 'a mode of motion,' as the physicists call it—in other words a vibration. The whole subject is as yet in complete darkness, but, as I observed at the beginning, I have discovered no new force and no new method of controlling the forces already known to man. I am relying entirely on old and well-known forces to carry me to the moon."

Silas Rockett was puzzled. He had apparently exhausted his entire arsenal. He tried one more shot, however.

"Is it possible that you are thinking of using atomic force?"

Doctor Hackensaw shook his head. "No," said he. "I shall not use atomic forces."

"Nor radio-active force? You will not propel your car by means of wireless waves?"

"No indeed, our electrical knowledge at the present day is insufficient for any such schemes."

"Then [illegible] it up," said Silas. I have read [illegible] that, if the earth were twen[illegible] its present diameter, bod[illegible] or would be traveling

on page 504)

READ!!

WORLD OF INVENTION

A Monthly Magazine INSTRUCTIVE and ATTRACTIVE

THE MARKET PLACE—a department of immense possibilities—aids the sale of inventions and furnishes information of inventions needed—it is here that the minds of the seller and buyer meet.

Interesting contributions from scientists, inventors and prominent writers.

ENGINEERING DEPARTMENT is especially valuable to inventors.

Many other very desirable features.

Subscription $2.50 for one year

Advertising rates on request.

For full particulars address

World of Invention Company

Three Thirty-four Fifth Avenue

New York City, U. S. A.

PATENTS

Hand Books on Patents, Trade Marks, etc., sent free. Our 77 years of experience, efficient service, and fair dealing assure fullest value and protection to the applicant. The Scientific American should be read by all inventors.

MUNN & CO.

618 Woolworth Building, New York

Tower Bldg., Chicago, Ill.
Scientific American Bldg., Washington, D. C.
Hobart Bldg., 582 Market St., San Francisco, Cal.

PATENTS

PROTECT YOUR INVENTION TODAY

Write for FREE illustrated Patent Book.

Radio-Electrical, Chemical and Mechanical Experts; Over 25 years' experience.

Prompt, Efficient Service. Write today

A. M. WILSON, Inc.

311-17 VICTOR BLDG. WASHINGTON, D. C.

PATENTS

If you have an invention and desire to secure a patent, send for our Free Guide Book, HOW TO GET YOUR PATENT. Tells our Terms, Methods, etc. Send model or sketch and description for our opinion of its patentable nature.

RANDOLPH & CO.

Dept. 172 Washington, D. C.

PATENTS, TRADEMARKS

PROTECT YOUR INVENTION!

Prompt, Efficient, Personal Service.

Reasonable fee. Full explanation in my booklet "PATENTS." Send for free copy today.

AMBROSE T. BUCKLEY

150 NASSAU ST. NEW YORK CITY

Digitized by Google

Original from UNIVERSITY OF CHICAGO

CAN YOU

think of a simple, practical idea that will fill one of the many requests we have on file for new inventions? It may mean a fortune for you. Thousands of things are needed RIGHT NOW. YOUR brains can help. Send today for our great new book—**"Inventions and Trade Marks, Their Protection and Exploitation"** and learn more about making money from ideas than you ever knew before. It tells many things that are wanted, too. **A postal will do—it is free.**

We help our clients, without charge, to get the dollars out of their ideas—having facilities none others possess.

Advice free.

Don't delay—get the book at once.

AMERICAN INDUSTRIES, INC.

225 Patent Dept., WASHINGTON, D. C.

PATENTS ADVERTISED For SALE FREE In INVENTION And MANUFACTURING SUPPLEMENT.

Published for the man with an idea. Send for free sample copy. One year's subscription 50c

TO CORRESPONDENCE SCHOOL STUDENTS & GRADUATES

Write for free book

THE SECRET DOOR

It contains a vital message for you. Sent absolutely FREE. No obligation.

NU KAPPA SIGMA

5 Bungalow Court

Newark, New Jersey

PATENTS

BOOKLET FREE — HIGHEST REFERENCES
PROMPTNESS ASSURED — BEST RESULTS

Send drawing or model for examination and report as to patentability.

WATSON E. COLEMAN, Patent Lawyer

624 F Street N. W., Washington, D. C.

PATENTS C. L. PARKER
Formerly Member Examining Corps, U. S. Patent Offices.
PATENT LAWYER

McGill Bldg., Washington, D. C.

Patents, Trade Marks, Copyrights, Patent Litigation

Handbook for Inventors, "Protecting, Exploiting and Selling Inventions," sent upon request.

PATENTS

Trade-Marks, Copyrights and Patent Litigation

Write for advice and instructions how to proceed, costs, etc.

Hand Book with illustrations of 100 Mechanical Movements sent free on request.

ALBERT E. DIETERICH

Patent Lawyer and Solicitor

Successor to Fred G. Dieterich & Co.

601 OURAY BLDG. WASHINGTON, D. C.

PATENTS As one of the oldest patent firms in America we give inventors at lowest consistent charge, a service noted for *results*, evidenced by many well known Patents of extraordinary value. *Book, Patent-Sense, free.*

Lacey & Lacey, 644 F St., Wash., D. C. Estab. 1869.

PATENTS Secured

Prompt service. Avoid dangerous delays. Send for our "Record of Invention" form and Free Book telling How to Obtain a Patent. Send sketch or model for examination. Preliminary advice without charge. Highest Reference. Write TODAY. Jacobi & Jacobi, 419 Ouray Bldg., Washington, D. C.

DRAWINGS

INVENTORS, have your ideas perfected by an expert machine designer. Working drawings, tracings, patent drawings, illustrations, etc. Moderate rates.

H. WETTSTEIN, M.E.

150 Nassau Street New York City

Answers to Scientific Problems and Puzzles

(*Continued from page* 456)

THE HUMAN SAMPSOM

If the stone weighs but a few times as much as the hammer the feat here described would be impossible, but if it exceeds the weight of the hammer many times, the inertia of the stone will prevent it from responding quickly to the blow and most of the energy of the stroke will be dissipated on the rock without affecting the man's head at all. The most difficult part of the performance is to support the stone—not to withstand the blow.

THE ENCHANTED RING

The results can be obtained by hiding a powerful electro-magnet within the figure of the man, connection being made to a source of alternating current. As the visitor approaches the figure to crown it with the ring, the magician steps on a contact maker concealed by the carpet and thus energizes the magnet. The alternating field of the magnet induces alternating eddy currents in the ring, and, as the very nature of eddy currents is to oppose the action by which they are produced, repulsion results between the ring and the magnet. The eddy currents are also responsible for the heating of the ring.

CALIBRATING A HYDROMETER

Since the hydrometer weighs 20 grams, it will displace 20 grams of any liquid in which it floats. At the level at which it floats in water it will displace 20 cubic centimeters because each cubic centimeter of water weighs a gram. At any other level, say for a liquid of density D, it will displace 20/D cc. Between the points marked "1" for water and "D" for some other liquid the stem must displace $(20 - 20/D)$ cc. But this volume is also $0.25x$ where x is the distance in centimeters between the points "1" and "D." Hence $0.25x = (20 - 20/D)$, or $x = 80\ (1 - 1/D)$.

ANOTHER PULLEY SYSTEM

Let X represent the force with which the man has to pull to maintain himself in equilibrium. Then the force on rope A will likewise be x pounds and the tension on each of the ropes B and C will be $2x$ pounds. But since the two ropes B and C together support the entire weight of 240 pounds we have that $4x = 240$, or $x = 60$ pounds.

WAXING OR WANING?

The phases of the moon are, of course, due to the relative position of earth, moon and sun, which constantly changes as the moon revolves eastward in its orbit around the earth. If the moon is on that side of its orbit in which it approaches the sun it is evident that we will see progressively less and less of the illuminated surface of the moon until when the moon is almost between us and the sun we cannot see it at all. With the moon in this part of its orbit, we have, then, a waning moon. We also have a moon with its illuminated surface toward the east. But when the moon is moving away from the sun on the other side of its orbit we see progressively more and more of the illuminated surface and hence have a waxing moon with the illuminated surface now toward the west.

RAY TREATMENT FOR LUNGS

Rafael Santos, a 25-year old medical student in the University of Paris, declares he has discovered an infallible cure for tuberculosis.

After three years of experimenting at the leading hospitals, he has constructed a set of lenses for introducing ultra-violet rays into the human lungs. He declares that his experiments proved that these rays will kill all tuberculosis bacilli in less than half an hour.

Free Railroad Fare

Student Winding a Stator

Chicago

The Electrical Center of the World

We pay your railroad fare to Chicago—the Electrical Center of the World—from any place in the United States. Grasp the opportunity to see the country at our expense. Come to Coyne—learn electricity in 3 months. The largest electrical school in the country specializing in electrical instruction *only*. Get a complete training so you can make big money as Power Plant Operator, Superintendent, Telephone man, Construction worker, auto, truck or tractor electrician, battery man, radio expert, or you can go into business for yourself as electrical contractor, dealer, auto ignition or battery expert and make from $3,000 to $20,000 a year. Hundreds of our graduates today are making big money and you can do the same if you grasp this opportunity—act now.

Learn Electricity In 3 Months

No books or useless theory. You are trained on $100,000 worth of electrical equipment. Everything from door bells to power plants. You work on motors, generators, house-wiring, autos, batteries, radio, switch-boards, power plants—everything to make you an expert ready to step right into a position paying from $45 to $100 a week. You get a complete practical training in Circuits, House Wiring, D. C., A. C., Armature and Stator Winding, Drafting, Auto, Truck and Tractor Electricity, Battery Building and Repairing and Radio. In addition you receive Free, a Life Membership which enables you to stay as long as you want or come back for further training at any time without charge.

Radio Course Free

We give you free a course in Radio—the marvel of the age. Constructing, installing and operating. You can build your own radio receiving set.

Earn While You Learn

We help students to secure jobs to earn a good part of their expense while studying.

Send Coupon Now

Don't delay a minute—send that coupon in right now for our big free catalog and full particulars of Free Railroad Fare offer. Act now!

COYNE Electrical School

Endorsed by Electrical Industry

1300-1310 W. Harrison St., Dept. 53-36

B. W. Cooke, Pres., Coyne Electrical School, Dept. 53-36 1300-1310 W. Harrison St., Chicago, Ill.

Dear Sir: Please send me free your big catalog and full particulars of your special offer of Free Railroad Fare.

Name _____

Address _____

_____

Digitized by Google Original from UNIVERSITY OF CHICAGO

An Easy Way to Learn

PHARMACY AT HOME

Graduate pharmacists are always in demand. The work is interesting and pleasant and salaries are good. Many young men open drug stores of their own and become independent.

There's an easy way to learn pharmacy right in your own home in spare time, without losing a day or a dollar from your present work.

The International Correspondence Schools course in Pharmacy supplies the knowledge which it will be necessary for you to have in order that you may pass your State Board Examination.

Just mark and mail the coupon printed below to the International Correspondence Schools, Box 6204-C Scranton, Pa., and full particulars about the Pharmacy Course or any other work of your choice will come speeding to you by return mail.

TEAR OUT HERE

INTERNATIONAL CORRESPONDENCE SCHOOLS
Box 6204-C, Scranton, Penna.

Without cost or obligation on my part, please send me full particulars about the subject before which I have marked an X in the list below:—

TECHNICAL AND INDUSTRIAL COURSES

☐PHARMACY	☐Civil Engineer
☐Chemistry	☐Surveying and Mapping
☐Automobile Work	☐Mine Foreman or Engineer
☐Agriculture and Poultry	☐Steam Engineering
☐Mathematics	☐Gas Engine Operating
☐Electrical Engineering	☐Airplane Engines ☐Radio
☐Electrician	☐Architect
☐Mechanical Engineer	☐Contractor and Builder
☐Mechanical Draftsman	☐Architectural Draftsman
☐Machine Shop Practice	☐Concrete Builder
☐Railroad Positions	☐Structural Engineer

BUSINESS TRAINING COURSES

☐Salesmanship	☐Business Management
☐Advertising	☐Industrial Management
☐Better Letters	☐Personnel Organization
☐Foreign Trade	☐Traffic Management
☐Stenography and Typing	☐Business Law
☐Business English	☐Banking and Banking Law
☐Civil Service	☐Accountancy (including C.P.A.)
☐Railway Mail Clerk	☐Nicholson Cost Accounting
☐Common School Subjects	☐Bookkeeping
☐High School Subjects	☐Private Secretary
☐Illustrating	☐Business Spanish ☐French

Name.....

Street Address.....

City..... State.....

Occupation.....

Persons residing in Canada should send this coupon to the International Correspondence Schools Canadian, Limited, Montreal, Canada.

RUSONITE

CRYSTAL RECTIFIER

(Patent Pending)

THE PERFECT SYNTHETIC CRYSTAL DETECTOR
SENSITIVE OVER ENTIRE SURFACE
No Hunting for "Spots." Loud and Clear.
Endorsed by Thousands of Satisfied Users.

Sensitiveness Guaranteed — Price Mounted **50c**

14 K. Gold Supersensitive RUSONITE CATWHISKER. Price **25c**
Permanent. Will not Oxidize.

RUSONITE REFLEX CRYSTAL
Manufactured Expressly for Reflex Circuits
Will Stand Up Under Heavy Plate Voltage
Price Mounted **$1.00**

From your dealer or direct from
RUSONITE PRODUCTS CORP.
New York, N. Y.

Dr. Hackensaw's Secrets

(*Continued from page* 502)

seven miles per second and hence would be hurled off into space. Have you found means of swelling out the earth to twenty-four times its present size?"

Doctor Hackensaw gave vent to a hearty peal of laughter. "No," said he, "I shan't attempt to give the poor old earth a fit of the dropsy. Nor shall I attempt to build a mountain or tower at the equator, of the required height. Let me see. The radius of the earth is four thousand miles, so my mountain would have to be 96,000 miles high! I'm afraid I couldn't find a contractor willing to undertake the work, nor would there be materials enough to complete it. But you are learning, Silas; you are getting nearer and nearer to the correct solution. It *is* centrifugal force that I shall use, but not the centrifugal force of the earth itself."

"What then?"

DR. HACKENSAW EXPLAINS HIS SCHEME

"Well, Silas, the problem is this. I must find means of giving my car a speed of about seven miles per second, and yet I must start the car gradually in order not to harm the passengers. Evidently the solution is to start the car slowly and keep it going more and more rapidly until it has acquired the necessary velocity, and then launch it off into space. In this way my passengers will suffer scarcely any inconvenience. There will be no shock at starting."

"I begin to see."

"Yes, the solution is obvious. What I need is a large revolving wheel like a Ferris-Wheel, with the car fastened to the end of one of the spokes. The wheel can be started very slowly and its speed gradually increased until the required velocity is attained, and then, at the proper moment, the car can be released and shot off into space. In this way there will not be the slightest shock for the passengers. But why am I jabbering away here? I have kept the affair secret so far, but I am soon to make it public. Come along with me and you can see the machine for yourself. It is all completed, save for a few final tests to make sure that everything is in good working order."

Luna City was the name which Doctor Hackensaw had given to the secluded spot which he had chosen as the launching-place of his car for the moon. For miles before arriving at the place, Silas Rockitt was eagerly scanning the horizon for the gigantic wheel which he firmly expected to see. His disappointment may be imagined therefore when, on arriving at the spot, he found that the apparatus was no larger than an ordinary Ferris-Wheel.

CENTRIFUGAL FORCE FROM SPINNING WHEEL HURLS CAR MOON-WARD

"What!" he cried in a tone of disgust. "Is it that little toy-wheel that is going to shoot your car to the moon!"

"Yes Silas—at least if my calculations are correct. Please notice that the frame-work, which supports the wheel, has its foundations in the solid granite beneath. In fact holes have been drilled deep into the rock, and the whole frame-work has been solidly tied down by means of powerful chains. This is not only to prevent wobbling, but to ensure that the wheel itself will not be carried away as well as the car."

"But that wheel seems only thirty feet in diameter!" said Silas. "Each revolution would be only about one hundred feet. To get a speed of seven miles per

(*Continued on page* 514)

You can have *disc wheels, too*

You can have steel disc wheels on your coaster wagon, just as Dad has on his car. And with over-sized rubber tires, too—sturdy, fat, solid rubber tires which ride easily and as swiftly as a racer.

Most boys like the wheels this way. But you can also get disc wheels with steel tires, or wood wheels with steel tires, if you prefer.

Substantial steel disc wheels are only one of the many features which make a boy as proud of his Auto-Wheel as Dad is of his Automobile. Just look at the list of other features on the

Auto-Wheel Coasters and Auto-Carts

Besides disc wheels with rubber tires (3 largest have over-size tires), the other features are: steel-tired disc or wood spoke wheels (all wheels interchangeable), self-contained roller bearings, hound brace, hand brake, special hub cap and locking pin, sides mortised and nailed.

Write for Catalog which shows all models of the Auto-Wheel and also all models of the Auto-Cart, the Auto-Wheel's junior companion for your little brother and sister. If you send the names of three local coaster wagon dealers, telling which ones sell the Auto-Wheel, we will give you a year's subscription FREE to the "Auto-Wheel Spokes-man" a dandy little magazine for a boy like you.

Auto-Wheel Coaster Co., Inc.
North Tonawanda, N. Y.

You, Too, Can Play the HAWAIIAN GUITAR Just as the Natives Do—



After Your FIRST LESSON You Will Play "ALOHA". We Guarantee That—

Our method is so simple, interesting and appealing that you begin in your first lesson to learn the famous Hawaiian Folk Song "ALOHA". Think how happy you will be when you surprise your friends by playing the fascinating Hawaiian Guitar *just as the natives do!*

Only Four Motions—and You Master Them Quickly!

In a few minutes you acquire the four motions necessary to play any piece—after that a short period of practice and you will have mastered this weirdly sweet music. Complete course of 52 lessons includes FREE beautiful Hawaiian Guitar, necessary picks, steel bar, etc. No extras.

No Previous Musical Knowledge Necessary

If you *never read a musical note in your life*—if you haven't even the slightest knowledge of music, we can quickly and positively teach you to play this wonderfully popular instrument. Don't be just a "listener" when you can *easily be the center of interest* among your friends.

Just Mail a Post Card for Details

of our remarkable FREE Hawaiian Guitar Offer—simply write: "I am interested"—*but do it today!*

Address
First Hawaiian Conservatory of Music, Inc.
Desk 40 —233 B'dway (Woolworth Bldg.) New York City

Special arrangements for lessons if you have your own Hawaiian Guitar.

FREE A Beautiful Hawaiian Guitar

Ernest Electric Radio Headset
3000 OHMS SUPERSENSITIVE
Price, $3.98
Plus 20c postage—Total, $4.18
Send 10c in Stamps for Radio Catalog
Ernest Electric Co.
4847 Easton Ave., St. Louis, Mo.

Digitized by Google Original from UNIVERSITY OF CHICAGO

Be A Practical Electrician

YOU can qualify in three months for a real job by the Sweeney System of Practical Experience. You don't need to be an engineer or scientist to install, operate and repair all kinds of electrical machinery. We teach with tools. You learn by actually working on our $150,000 special equipment in this world famous Million Dollar Trade School where we have turned out 55,000 trained mechanics.

H. J. SWEENEY, President

FREE Simply send name today. Get our Special Offer and interesting Electrical Catalog. Free radio course. Free Railway fare to Kansas City. Big opportunities in Electrical industry for young men. No colored students accepted.

WRITE US AT ONCE

LEARN · A · TRADE

Sweeney

AUTOMOTIVE & ELECTRICAL SCHOOL
5 SWEENEY BLDG. KANSAS CITY, MO

NEON SIMPLEX RECEPTOR



$8.50

Tube and Head Phones Not Included

Vacuum Tube Receiver for Price of Crystal Set

NEW INVENTION REVOLUTIONIZES RADIO

Have heard stations 1500 miles. This set after a rigid test by the **New York Tribune Institute** was given the **Certificate of Approval.** One dial controls everything. Uses an ordinary dry cell battery. So simple can be worked by a baby. Start receiving 10 minutes after arrival. Iron Clad guarantee. Will exchange if not satisfactory.

$15.00 set for $8.50 *Book of instructions and*
Phones .....$5.00 *Copy of Certificate from*
Tube .....$5.00 *Tribune Institute with each set.*

SPECIAL OFFER Send $15.00 and we will send you complete outfit, including phones and tube. Send $3.00 with order, pay Postman balance upon delivery. Order yours today.

ROYAL MFG. CO. WORLD BLDG. NEW YORK

New Single Phase A. C. Motors

REBUILT MOTORS

¼ H.P. — 110 volt, 60 cycle 1725 speed, complete with cord, plug and grooved pulley $13.00
Same motor equipped with buffer and grinder $27.50

ONE YEAR GUARANTEE

All sizes, direct and alternating. We repair and exchange motors and generators. Let us quote on your needs.

Satisfaction guaranteed or money refunded
Illustrated Catalog of Motors and Supplies FREE

HYRE ELECTRIC CO.

631-H So. Dearborn St., Chicago, Ill.

Filters 4 Gallons in 5 minutes

Fastest Portable Filter in the World
FOR GRAPE JUICE, CIDER, ETC., ETC.

HOME SIZE filters quart of water a minute. No. 6A $8.00.

LARGE SIZE filters gallon of water a minute. No. 6B $15.00. Write for free circular.

VACCU-FILTERSALES CO., Inc.
Dept. 6 70 Fifth Ave. New York

Around the Universe

By RAY CUMMINGS

(*Continued from page 435*)

announced, "I got to have all the dope in my head."

Sir Isaac had frequently been tracing their flight upon a celestial map of his own making, and Tubby now demanded to see it. Sir Isaac produced it readily, from the table drawer, and clearing a space on the table, unrolled it before them. By the light of an electric bulb—for the side and floor windows admitted nothing but starlight—Tubby examined it.

"This is merely a rough drawing I made myself," Sir Isaac explained apologetically. "It shows the solar system—though not at all to scale—and gives a rough idea of the present positions of the planets, and our course up to date."

This is what Tubby saw:

"You notice," said Sir Isaac, indicating with his pencil point, "that the Sun occupies the center of the solar system, and the planets revolve around it in concentric rings which are called orbits. These are not circles, but are ellipses—so that the Sun is not exactly in the center, but a little off to one side—in one of the foci of the ellipse, to be technical. Thus the orbit is somewhat nearer the Sun in one portion and further away in another. The amount of this difference is called the eccentricity of the orbit."

Tubby nodded his comprehension; Sir Isaac went on:

"Fortunately, as you observe, all the planets chance to be on this side the Sun just now. . . . I must alter our course toward Jupiter. We are now headed for Venus, but Jupiter, you see, is considerably further along in his orbit."

Sir Isaac went to the keyboard, and a moment later Venus, as seen through the lower windows, swung sidewise out of sight. A new region of gleaming stars—none of unusual brightness—came into view.

"I am heading well past Jupiter," said Sir Isaac. "We are falling diagonally sidewise now, *forward* by the combined attraction of all those stars, and *sidewise* by the repulsion of Venus and the Earth and all the stars behind them. This will bring us into a direct line drawn from the Sun to Jupiter—and then I can make better speed by using the Sun's repulsion and Jupiter's attraction combined, which I cannot do now."

By careful consulting of the chart, Tubby finally got this clear.

"It's a longer route," Sir Isaac added. "But I think it will prove quicker. . . . You'd better lie down, Tubby—you're tired out."

Tubby was indeed terribly sleepy—but, unselfishly he realized that Sir Isaac must be also.

"I'll watch," he said. "*You* take a nap."

But Sir Isaac wished to get the vehicle upon its direct course first.

"We'll be in line with the Sun and Jupiter in about two hours," he explained. "I'll call you then. From then on we will hold the same course all the way."

Tubby yielded, and started upstairs. Then, remembering Ameena, he went into the store-room instead, and with the cushions from one of the chairs of the instrument room for pillows, stretched out on the floor and went to sleep promptly.

* * *

"Wake up," said Sir Isaac, shaking him. "It's seven forty—you've been asleep nearly four hours."

Tubby rubbed his eyes, and clambered to his feet. "What's doin'? Anything new? Where are we?"

More Money For You in RADIO

THE amazing expansion of Radio has opened up hundreds of wonderful new positions on land and sea. Good salaries, fascinating easy work, short hours, and a wonderful future are offered to ambitious men who get into Radio now.

Take advantage of these wonderful opportunities to step into a good paying position in this great new field. Radio offers you an opportunity to travel and see the world, with all expenses paid, and a fine salary besides. Or you can stay at home and work up to a position paying up to $10,000 a year. One of our recent graduates secured a position one week after graduating paying a salary of $300.00 per month.

Easy to Learn Radio at Home

Hundreds of men are already earning handsome incomes in this wonder science. If you want to get into a profession where opportunities are unlimited make Radio your career—becomes a Certified Radio-trician.

Hundreds of Certified Radio-tricians are needed to design Radio Sets; to make new Radio improvements; to manufacture Radio equipment and to install it; to maintain and operate great broadcasting stations and home Radio sets; to repair and sell Radio apparatus; to go into business for themselves; to operate aboard ship and at land stations.

You can easily and quickly qualify in your spare time at home through the help of the National Radio Institute. Prominent Radio experts will help you. Four wonderful instruments are furnished, making the work thoroughly practical. The same plan that has already helped hundreds of our graduates to real success and real money in Radio is open to you.

Send for Big Book

No other field today offers such great opportunities as Radio. Take your choice of the many wonderful openings everywhere. Prepare now to step into the most interesting and best paid profession today. Read about the opportunities open now—the different kinds of work—the salaries paid. Write today for the free 44-page book that tells how America's first and biggest Radio school can teach you to become a Certified Radio-trician in your spare time. Mail the coupon or write a letter now!

National Radio Institute

Dept. 14-I Washington, D. C.

National Radio Institute, Dept. 14-I
Washington, D. C.

Send me the book, "Your Opportunity in Radio," which tells all about the opportunities in Radio, how spare time study at home will qualify me quickly as a Certified Radio-trician so I can get one of these splendid positions, and how your free Employment Service helps me to secure a good position.

Name ..... *Age*.....

Street .....

City ..... *State*.....

Digitized by Google

Original from UNIVERSITY OF CHICAGO

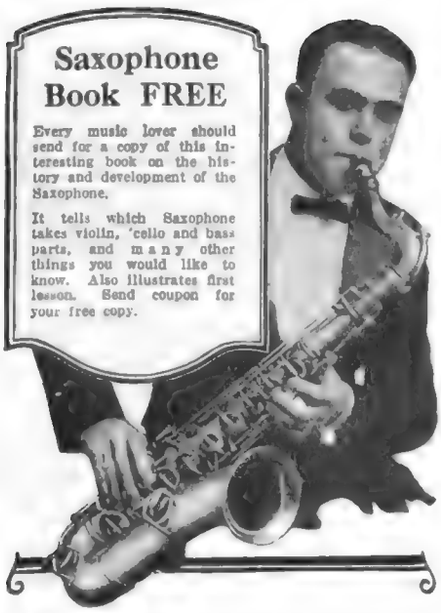
Saxophone
Book FREE
Every music lover should send for a copy of this interesting book on the history and development of the Saxophone.
It tells which Saxophone takes violin, 'cello and bass parts, and many other things you would like to know. Also illustrates first lesson. Send coupon for your free copy.

Saxophone Players in Big Demand

For Bands and Orchestras, for church, lodge and school musical affairs, for social and home entertainment, the Saxophone is the most popular instrument and one of the most beautiful. A good Saxophone player is always popular socially and enjoys many opportunities to earn money. Saxophone players are always in demand for dance orchestras. Every town should have a Saxophone quartette or orchestra.

BUESCHER

TRUE-TONE SAXOPHONE

Easiest of all wind instruments to play and one of the most beautiful. With the aid of the first three lessons, which are sent free (upon request) with each new Saxophone, the scale can be mastered in an hour; in a few weeks you can be playing popular music. Practice is a pleasure because you learn so quickly. You can take your place in a band within 90 days, if you so desire.

Buescher-Grand Trumpet

Especially easy to blow, with an improved bore and new proportions. With the mute in, it blows so softly and sweetly that it will not annoy anyone. A splendid home instrument.

Free Trial—Easy Payments

You will be allowed six days' free trial of any Buescher Grand Saxophone, Cornet, Trumpet, Trombone or other instrument. Easy terms of payment can be arranged. Mention the instrument interested in and a complete catalogue will be mailed to you free.

BUESCHER BAND INSTRUMENT CO.

Everything in Band & Orchestra Instruments.

6013 Buescher Block **Elkhart, Indiana**

Buescher Band Instrument Co.
6013 Buescher Block, Elkhart, Ind.

Gentlemen:
I am interested in the instrument checked below:
Saxophone ....Cornet ....Trombone ....Trumpet ....
(Mention any other instrument interested in)

Name .....
St .....
.....State .....

"We're on our direct course to Jupiter now," Sir Isaac answered. He had shaved and washed. His hair was slicked back and he was smoking a cigar; but his face was haggard and he looked tired out.

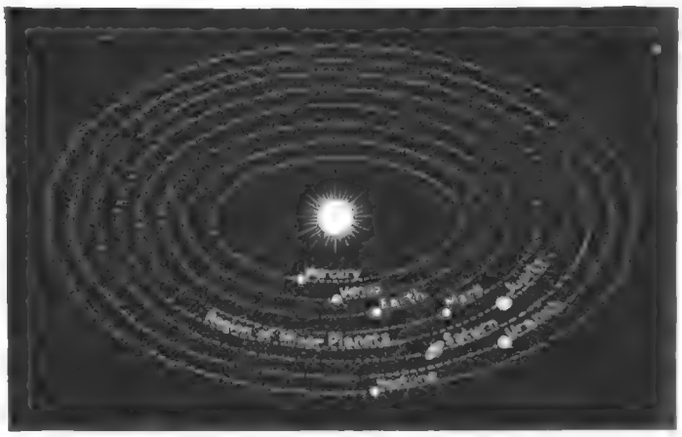

Sir Isaac's Sketch Giving a Rough Idea of the Positions of the Planets.

"You can take charge now," he added. "I must get some sleep, if only for a few hours."

Tubby sat alone on a cushion at the floor window of the instrument room. The Sun, from which they were now receding, as Sir Isaac had told him, at a velocity of 15½ million miles an hour, was blazing high over the roof of the vehicle, and thus was invisible from the starlit room downstairs. Through the floor window Tubby could see nothing but gleaming silver stars. One of them, he could not distinguish which, was Jupiter.

Tubby whistled to keep himself awake. After an interval he looked at the chronometer. It was 8.20 A. M. Why didn't Ameena wake up? Tubby was lonesome and depressed. A little later he went into the kitchen and made himself a cup of coffee. Again he wished fervently Ameena would come down and join him. Should he wake her up? Wasn't it time for breakfast? Wouldn't she ever come down?

For another hour he wandered disconsolately about the lower rooms, glancing at intervals through the floor windows to make sure no derelicts were in sight. Remembering Sir Isaac's jaunty appearance, he shaved and washed—fortunately having had the forethought, the night before, to rescue his razor from the bedroom upstairs.

He had about decided in desperation to awaken the girl, when, on an impulse he climbed into the little dome on the roof where Sir Isaac had mounted a small telescope. A moment later he was clattering down through the vehicle, bellowing loudly for Sir Isaac and Ameena.

THE SKY TRAVELERS ARE FOLLOWED

"Hey, perfessor! Ameena! Oh, Ameena! Get up, quick! There's somethin' follerin' us!"

Sir Isaac came bounding upstairs from the store room, meeting Tubby in the upper hallway. From one of the bedrooms came Ameena's sleepy voice:

"What *is* it? *Must* I get up?"

Together the two men rushed up into the little observatory. Another vehicle, twice as large as their own and somewhat different in shape, hovered almost directly above them, showing as a dark spot in the firmament and edged with silver from the Sun's rays behind it.

"That Mercurian girl!" Sir Isaac gasped, with sudden memory. "She flew to the Twilight Country! She said she was going to have revenge!"

They were indeed, being followed! This pursuing enemy was at that moment hardly more than five miles away, and was overtaking them rapidly!

CHAPTER VI

IN WHICH THE VOYAGERS PASS MARS, DODGE THE MINOR PLANETS AND INTERVIEW HIS SUPREME HIGHNESS THE GREAT MOGUL OF JUPITER

Sir Isaac dashed back to the instrument room three steps at a time, with Tubby at his heels. Ameena came from her room and followed them.

"What is it?" the girl demanded. "Is something wrong?"

Tubby called back over his shoulder:

"Them Mercurians is after us. Right overhead—comin' fast. Come on down—we got to do somethin'."

Sir Isaac rushed to the keyboard.

"Switch our course," Tubby suggested. "Let's see if they can turn when we do. . . . Or how about goin' faster? Can we go faster?"

"Wait," commanded Sir Isaac. He depressed two keys—a black one on one bank and a white one on another—and raised the ones which had been down. Then he dashed away upstairs again.

Tubby had no more than time to compliment Ameena on her appearance—she was dressed quite as on the day before, but her face was flushed with excitement and her eyes sparkled, so that she was more beauti-

BIG PROFITS IN 8 HR. Battery Charging

Start now making big profits charging batteries with H B Constant Potential 8-Hour System. No experience needed. You Can Clear $150 to $300 Every Month. HB outfit comes complete, ready to connect and operate. New Built-in Patented HB Voltage Regulating Winding Absolutely Eliminates Reversing. Saves current and labor, runs all night without attention.



$30 Monthly Pays For Your H B Charger

Small cash payment brings your HB Constant Potential Charger. Easy Terms of Only $30 Monthly Quickly Pay Balance from Your Profits. 30 Days' Free Trial on Money - Back Guarantee Lets You Try HB Outfit at Our Risk. Oversize HB construction Insures 1-3 More Output Than Any Other Outfit of Similar Rating. Start now to make big battery charging profits. Write today for information.

Box 89 HOBART BROS. CO. Troy, Ohio.

Make Your Own **Radio Receiving Set**

Enjoy the concerts, baseball scores, market reports, latest news, etc., as sent out by large broadcasting stations. The NEW copyright book, "EFFICIENT RADIO SETS," shows how to make INEXPENSIVE sets for receiving wireless broadcastings. Sent postpaid for 25c. THE MACK CO., Dept. F, 9130 Baltimore Ave., Chicago.

Send To-day for the

"Electrical Worker's Friend"

An electrical book of 66 motor drawings with complete instructions for rewinding and reconnecting A. C. motors. Special at $3.00

Or write for full particulars of this valuable book.

SMITH & SMITH PUBLISHING CO.
Dept. B., 7428 Hermitage St., Pittsburgh, Pa.

Digitized by Google Original from UNIVERSITY OF CHICAGO

Why Good Dancers Are Popular

Everyone admires and wants to dance with the person who knows the latest steps. There's no need to envy others. *You* can enjoy the pleasures and popularity of a really good dancer. Arthur Murray, America's foremost teacher of social dancing, has developed a remarkable new easy method which enables *anyone* to learn all the latest popular steps at home—in a few hours—*at very little cost!*

No music or partner is needed. More than 90,000 have learned by mail. *Your success is positively guaranteed!*

Five Dancing Lessons Free

To prove you can learn any step in a few minutes, and all of the dances in a few hours, Arthur Murray will send you *free*, in plain cover, 1. A lesson in Fox Trot. 2. The secret of leading. 3. How to Follow. 4. How to Gain Confidence. 5. How to Avoid Embarrassing Mistakes, and other dancing helps.

These valuable lessons will show you how easily and quickly you can become an accomplished dancer and how you can be more popular by dancing *well! Learn at home and surprise your friends.* This offer of free instructions may be withdrawn at any moment. Write for your lessons *today!* To pay the cost of mailing, handling, etc., send 25c. *Money back if not delighted.*

ARTHUR MURRAY, Studio 804, 290 Broadway, N.Y.

Standard Spanish ARMY

Used by French During World War

Buy direct from sole U. S. Importers and SAVE ½ on this

GENUINE ASTRA AUTOMATIC

Your chance to have the finest European pistol—the equal of any similar American gun—at about ½ the price. Order direct at these special prices.

$7.75	25 calibre—7 shot—C. O. Q. Automatic.
8.95	25 calibre—7 shot—Astra Automatic.
9.95	25 calibre Astra with triple safety.
10.95	32 calibre—10 shot Astra, extra magazine.
16.95	32-20 and 38 cal. swing-out cyl. revolvers.

We **guarantee** every gun against defective workmanship; brand new; of **Drop Forged Steel Throughout.** Before buying any weapon **INSIST** on this guarantee. **SEND NO MONEY** unless you wish. State model desired—pay postman on delivery plus postage. Satisfaction guaranteed or money refunded. Write for new firearms catalogue.

CALIFORNIA TRADING CO.

Dept. 259, Terminal Bldg., Los Angeles, Cal.

$4.00 ADDING MACHINE

The **GILSON ADDER** will do your figuring easily, quickly and with absolute accuracy. It adds, subtracts, multiplies and divides and automatically carries from one column to the next. Capacity 109,999,999 or $1,099,999.99. Size 3½"x5"x1". Made with aluminum case and steel operating parts. Written Two-Year Guarantee. Catalogue free.

Price, postpaid, $4.00

Your money back if you are not satisfied.

GILSON SLIDE RULE CO., NILES, MICH.

Drafting — Plan Reading — Building

Never before such a demand for skilled Draftsmen and Building Experts. More big jobs open than men to fill them.

TRAIN BY MAIL

Let Chicago "Tech" give you the training that brings a high salary. Send for information.

Chicago Technical College

945 Chicago "Tech" Bldg. CHICAGO

Sell Shirts

Sell Madison "Better-Made" Shirts, Pajamas, and Nightshirts direct from our factory to wearer. Nationally advertised. Easy to sell. Exclusive patterns. Exceptional values. No experience or capital required. Large steady income assured. Entirely new proposition.

WRITE FOR FREE SAMPLES.

MADISON SHIRT CO., 503 B'way, N.Y. City

Have You Something To Sell or Exchange

A Classified Ad in SCIENCE & INVENTION will reach 150,000 at a cost of only 12 cents a word.

ful than ever—when Sir Isaac was back. He sank into a chair and smiled at them weakly.

"That danger's past, for the moment. We have left them out of sight behind us."

"So quick?" exclaimed Tubby. "Out of sight already? We must be goin' some."

Ameena looked her relief. Sir Isaac made some further adjustments of the keys.

"I've just slowed us up again," he said. "I would not dare go as fast as we would very soon have been going."

"Well, how fast are we goin' the way, you got it now?" Tubby persisted.

28 MILLION MILES PER HOUR

"About 28 million miles an hour," stated Sir Isaac. "Of course I haven't computed it yet—but I judge we shall shortly attain that velocity. I am now using six-sevenths of the Sun's repulsion with everything else in neutral. Our rate of speed depends very largely on the length of time allowed for acceleration, you understand."

He gazed down through the lower window anxiously, and muttered:

"Heavens, I do hope nothing gets in our way!"

"Maybe we better slow up," Tubby suggested. It did seem a trifle fast to be going, when he came to think of it. On the other hand such a speed was not in the least beyond his understanding now. Sir Isaac had already explained something of the laws governing freely falling bodies; and Tubby had recalled that old stunt of dropping a baseball from the top of the Washington Monument, which fell so fast even in that little distance that even professional catchers could hardly catch it. The vehicle was more than a freely falling body—it was being *pushed* downward.

Sir Isaac shook his head at Tubby's suggestion that they slow up a bit.

We must chance the danger," he said, though not without considerable perturbation. "That Mercurian vehicle may be able to attain this speed also—or even a greater one. We cannot tell."

"Suppose they *should* overtake us," Ameena speculated. "They could not board us—or collide with us without death to themselves?"

"They might have some means of destroying us—*I* do not know," Sir Isaac replied. "Though possibly the Light-ray is useless in Space." His voice became meditative. "Curious I never thought of *that* before. I suppose it *would* be inoperative."

"*I* think," said Ameena, "that they are merely trying to reach Jupiter before us. Perhaps they want to warn the Jovians against us. To persuade them not to——"

"Meaning——" Sir Isaac interrupted eagerly. The poor man's mind was working so constantly that he seemed grateful to anyone who would do his thinking for him.

Ameena finished:

"Meaning that I think it shows that on Jupiter the rulers are at least neutral."

"Sure," exclaimed Tubby. "You're some clever girl, Ameena. If them Jovians was our enemies, these Mercurian guys wouldn't bother chasin' us there. They'd know we'd get walloped anyhow. You got the right idea, kid." He gazed admiringly at Ameena, and the Venus-girl blushed charmingly.

This conclusion, thus happily arrived at, cheered the three adventurers immeasurably. They now felt tolerably certain of at least a square deal on Jupiter—if only they could arrive there ahead of the enemy.

"Well, that bein' settled," declared Tubby, rising. "Let's eat."

On this flight outward from the Sun they had crossed the orbit of Venus about 6.30 A. M., while Tubby and Ameena were asleep—though this course to Jupiter took them many million miles ahead of Venus' position

HIGH SCHOOL COURSE IN TWO YEARS

You Want to Earn Big Money!

And you will not be satisfied unless you earn steady promotion. But are you prepared for the job ahead of you? Do you measure up to the standard that insures success? For a more responsible position a fairly good education is necessary. To write a sensible business letter, to prepare estimates, to figure cost and to compute interest, you must have a certain amount of preparation. All this you must be able to do before you will earn promotion.

Many business houses hire no men whose general knowledge is not equal to a high school course. Why? Because big business refuses to burden itself with men who are barred from promotion by the lack of elementary education.

Can You Qualify for a Better Position?

We have a plan whereby you can. We can give you a complete but simplified high school course in two years, giving you all the essentials that form the foundation of practical business. It will prepare you to hold your own where competition is keen and exacting. Do not doubt your ability, but make up your mind to it and you will soon have the requirements that will bring you success and big money. YOU CAN DO IT.

Let us show you how to get on the road to success. It will not cost you a single working hour. It costs you nothing but a stamp.

American School

Dept. H.628, Drexel Ave. & 58th St., Chicago

American School

Dept. H.628, Drexel Ave. and 58th St., Chicago

Send me full information on the subject checked and how you will help me win success.

.....Architect	.....Lawyer
.....Building Contractor	.....Machine Shop Practice
.....Automobile Engineer	.....Photoplay Writer
.....Automobile Repairman	.....Mechanical Engineer
.....Civil Engineer	.....Shop Superintendent
.....Structural Engineer	.....Employment Manager
.....Business Manager	.....Steam Engineer
.....Cert. Public Accountant	.....Foremanship
.....Accountant and Auditor	.....Sanitary Engineer
.....Bookkeeper	.....Surveyor (& Mapping)
.....Draftsman and Des'gner	.....Telephone Engineer
.....Electrical Engineer	.....Telegraph Engineer
.....Electric Light & Power	.....High School Graduate
.....General Education	.....Fire Insurance Expert
.....Vocational Guidance	.....Wireless Radio
.....Business Law	.....Undecided

Name.....

Address.....

Digitized by Google Original from UNIVERSITY OF CHICAGO

Banish YOUR Ailments

STRONGFORT
The Perfect Man

Get rid of your ailments and physical defects. Banish the weaknesses that make your life a wretched failure. What good is life anyway, when one day of misery just follows another with no relief in sight, and big bills to pay for dope and drugs that can never help you and may seriously harm you.

No matter what your condition is or what caused it, you can aid Nature in overcoming your nagging complaints and fit yourself for the joys of life with STRONGFORTISM, the Modern Science of Health Promotion.

A lifetime's experience and research is contained in my free book, **"Promotion and Conservation of Health, Strength and Mental Energy."** It will tell you the truth about your physical condition and show you how you can make yourself over into a vigorous specimen of vital, magnetic manhood. Mark the subjects on the free consultation coupon on which you want **special confidential information** (write additional subjects on extra line) and send to me with a 10c piece (one dime) to help pay postage, etc. Send for my free book **Right Now—TODAY.**

LIONEL STRONGFORT
Physical and Health Specialist
Dept. 525 Newark, N. J.

- - - CUT OUT AND MAIL THIS COUPON - - -
FREE CONSULTATION COUPON

Mr. Lionel Strongfort, Dept. 525, Newark, N. J.—Please send me your book, **"Promotion and Conservation of Health, Strength and Mental Energy,"** for postage on which I enclose a 10c piece (one dime). I have marked (X) before the subject in which I am interested.

..Colds	..Pimples	..Youthful Errors
..Catarrh	..Blackheads	..Vital Losses
..Asthma	..Increased Height	..Impotency
..Hay Fever	..Insomnia	..Falling Hair
..Obesity	..Short Wind	..Weak Eyes
..Headache	..Flat Feet	..Gastritis
..Thinness	..Stomach Disorders	..Heart Weakness
..Rupture	..Constipation	..Poor Circulation
..Lumbago	..Biliousness	..Skin Disorders
..Neuritis	..Torpid Liver	..Despondency
..Neuralgia	..Indigestion	..Round Shoulders
..Flat Chest	..Nervousness	..Lung Troubles
..Deformity (Describe)	..Poor Memory	..Stoop Shoulders
..Successful Marriage	..Rheumatism	..Muscular Development
	..Manhood Restored	..Great Strength

Name .....
Age ..... Occupation .....
Street .....
City ..... State .....

SMASHING SALE
By Oliver Typewriter Co.



While They Last
1000 No. 9 Olivers
Rebuilt like new, right in Oliver Factory, only
$44.50

Save $50

Never before an offer like this, and probably never again! Only the great Oliver Company itself could do it. Famous Model No. 9 Oliver at the slashed price of only $44.50—and a year to pay! Genuine No. 9 Oliver with standard keyboard and all late improvements, rebuilt throughout like new right in our own factory. The equal—yes the superior, we say, of any $100 typewriter on the market. And yours for only $44.50 on this special sale of 1,000 machines.

Free Trial—A Year to Pay

Act quick before the 1,000 machines are gone. Try, however before you buy. We give you 5 days free trial. Return or keep the Oliver as you decide. No cost to you whatever for the free trial. A year to pay if you buy. Write today for full particulars of this sale. Mail coupon or postal.

Oliver Typewriter Co. (Rebuilt Machine Dept.) Oliver Type-writer Bldg. Chicago

Oliver Typewriter Co., (Rebuilt Machine Dept.) 67C Oliver Typewriter Bldg., Chicago

Please send me full particulars of your sensational sale of 1,000 No. 9 Olivers.

Name.....
Address.....

Make Big Profits Charging Batteries

Small cash payment brings you HB 8 hour charging outfit. Easy terms only $30 monthly let your profits pay balance with nice surplus besides. Thirty day free trial on money back guarantee lets you try HB outfit at ted voltage-rek-lutely prevents ent. Start now th HB 8 hour ite today fo

S92 Troy, O.

in her orbit. This Tubby and Ameena readily understood by another glance at Sir Isaac's drawing, which they consulted soon after breakfast.

About 8.15 A. M., while Tubby had been on watch alone, they had crossed the orbit of the Earth—though nearly twice as far then from the Earth as they had been from Venus.

"Mars revolves around the Sun at a mean distance of 141,701,000 miles," said Sir Isaac, some little time after breakfast. "We should have intersected his orbit about 10.40 A. M.—that was when we were closest to him."

"An' you didn't tell us!" cried Tubby reprovingly. "I want to get a look at that—that murderin' villain."

It was then about ten minutes of eleven, Mars, to which they had passed comparatively close, still showed as a half-lighted, circular, reddish disc. Its tracings of fine intersecting lines—the "canals"—were quite distinguishable.

Even at the enormous velocity the vehicle had now attained, all the heavenly bodies hung apparently motionless in the firmament—except Mars, which because of its nearness, seemed slowly moving upwards as the vehicle dropped past it.

Tubby, standing at the side window, shook his fist at the disturber of the peace of the Solar System.

"We'll fix you yet—you——"

meena laughingly pulled him away.

"Is Mars as large as my Venus?" she asked Sir Isaac. "Or your Earth?"

"The diameter of Mars is 4,316 miles," said Sir Isaac. "The Earth is 7,917 and Venus 7,629."

"Only a little guy!" Tubby was contemptuous. "That's the way with them little fellers—Mercury too—always lookin' for a scrap."

Sir Isaac went on:

"Mars revolves around the Sun once in a little less than 687 days. That is the length of his year. His orbital speed is 15 miles per second. He is ahead of the Earth now in his orbit, but the Earth travels forward at the rate of 18½ miles per second. Thus you see, the Earth is overhauling Mars—and when they are both in line with the Sun, that will be opposition. That's their closest point to each other until the Earth comes around again—and that's when the Martians will attack."

Poor Sir Isaac, from one threatened catastrophe or another, had had so far very little sleep since leaving the Earth two days before. About half past eleven that morning Tubby and Ameena sent him to bed again.

"Don't let me sleep more than two hours at the most," he said anxiously. "There are thousands of Minor Planets in here between Mars and Jupiter."

"Shucks," disclaimed Tubby. "That don't make no difference. Ain't *I* on guard?"

It was a magnificent chance for sarcasm, but the sterling character of Sir Isaac forbade such weakness. All he said was:

"Our velocity of 28,000,000 miles an hour would be sufficient to carry us from Earth to Venus, or from Venus to Mercury in a little over sixty minutes! I don't want you to forget how fast we are falling now."

With which admonition he retired.

It was a long, tiresome, comparatively uneventful day—at least it would have been, if Tubby had not had Ameena's companionship. She sang to him again; and with his somewhat raucous tenor voice they contrived "Inter-planetary duets" as Sir Isaac jocularly called them. When they had tired of music they climbed into the dome to make sure their pursuers had not again come into sight. The overhead sky, out of which they were falling, showed nothing unusual. Mars—well above them now—had dwindled to a small, reddish star; the Earth, Venus and Mercury were indistinguishable among the mass of other glittering worlds.

WE TEACH COMMERCIAL ART

Meyer Both Company, the largest Commercial Art Organization in the World, offers you an unusual opportunity for practical training, based upon twenty-three years of success. This nationally known organization each year produces and sells to advertisers over 15,000 commercial drawings. Meyer Both instruction is the difference between successful fact and experimental theory. This well paid profession equally open to men and women. Home study instruction.

Get Facts Before You Enroll in Any School

Ask the Advertising Manager of the leading newspapers in your city, anywhere in the United States, Canada, England or Australia about the Meyer Both Company—let them tell you about us. Write for our illustrated book telling about the success of our students—for one-half the cost of mailing—four cents in stamps.

MEYER BOTH COMPANY
Department of Art Instruction
Michigan Ave. at 20th St., Dept. 64 CHICAGO, ILL.
Note—To Art and Engraving Firms: Secure practical artists among our graduates. Write us.

The MONARCH Jr. Lathe
IS PRICED WITHIN YOUR MEANS

Most efficient machine tool you can have in home workshop, repair shop or garage too. Turns out, with 1000th-inch accuracy, all small wood and metal parts that other lathes will. Experimenters, inventors, mechanics enthusiastic over it. Completely equipped; automatic safety devices; semi-quick change gear.



9 in. Lathe
2½ ft. bed
with bench legs
$245

Also built with bed lengths up to 5 feet. Made in 11-inch swing size too, at slightly higher price.

THE MONARCH MACHINE TOOL CO.
418 Oak Street Sidney, Ohio

"VACCU-PUMPS"

Our TYPE "A" Vaccu-Pump can be used for hundreds of experiments, and for distilling under Vacuum, Vacuum drying, filtering, transferring liquids, etc. Should be in every doctor's office, laboratory, college, slaughter house, hospital. Write for circular. Price complete with 110 v., 60 cycle A.C. or D.C. Motor and Gauge $75.00.

A. B. C. LABORATORIES
100 Lawrence St. (W. 126th St.), New York City, N. Y.

Accredited Day and Evening Courses leading to the degree of *Doctor of Medicine & Surgery*

Study Medicine at night

Opportunity to work way through School, make uppre-medical credits. For catalog, address Registrar, Box 220
Chicago Medical School, 2832 Wabash Ave., Chicago

Straightens Shoulders —Increases Pep

THE NATURAL BODY BRACE—Corrects stooping shoulders, straightens the back, gives the lungs chance for normal expansion, induces proper breathing. Brings restful relief, comfort, energy, and pep. For men and women.

Costs nothing to try it
Write for 30 days free trial offer and free book.
NATURAL BODY BRACE CO.
Howard C. Rush, Pt. 286 Rush Bldg., Salina, Kansas

You can be quickly cured, if you
STAMMER

Send 10 cents for 288-page book on Stammering and Stuttering, "Its Cause and Cure." It tells how I cured myself after stammering 20 yrs. B. N. Bogue, 798 Bogue Bldg., 1147 N. Ill. St., Indianapolis.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

"Look at the Sun," said Tubby. He pulled Ameena toward him. He had indeed, progressed to where his arm was almost constantly about her, which, since youth and love are the same the Universe over, Ameena accepted as quite reasonable and natural.

"Ain't the Sun gettin' little?" Tubby added.

The orb of day had dwindled to half its apparent size as viewed from Earth. The vehicle too, was growing hourly colder. Ameena shivered a little.

"Come on down," said Tubby solicitiously. "We'll have to get the perfessor to heat the place up more—an' get you dressed warmer." His appreciative glance swept Ameena's dainty figure. "I'll see what I can dig you up—right after lunch. Come on down where it's warmer—let's play cards."

Explaining to the girl the intricacies of the fifty-two different cards of the deck took nearly another hour, after which Tubby's stomach peremptorily informed him that it was time for lunch. He swept up the cards, and with sudden thought gazed anxiously down through the lower window to see if they were about to collide with anything. Jupiter had grown to a marvellously brilliant star; beyond that, everything was as before.

"You go fix up somethin' to eat," he said to the girl. "I'll call the perfessor—he's asleep long enough anyway."

Sir Isaac came down shortly, dressed in a warm-looking tweed suit with golf trousers. Glancing at the chronometer, he immediately plunged into an intricate mathematical calculation.

"Our velocity since 9.30 this morning has averaged just 28,502,122 miles an hour," he announced a little later. "My guess was right."

"Good," said Tubby. "Come on into the dinin' room. Lunch is ready."

After lunch Tubby himself dressed more warmly—in a Norfolk jacket golf suit and heavy grey flannel shirt, an outfit that was extremely becoming. He then sent Ameena upstairs, magnanimously offering her anything and everything in the way of apparel she could find. She returned a few moments later, and stood shyly awaiting his approval. She had donned a heavy pair of golf stockings and rubber-soled shoes which miraculously were almost small enough for her. And over her knee-length white dress, she was wearing a natty-looking man's overcoat which almost swept the ground. Her hair was now piled on her head, with a huge, red-silk handkerchief bound around it.

Even Sir Isaac glanced up from his figures long enough to admire her appearance. She looked indeed, like a radiantly beautiful little Earth-girl, on her way to the beach for a swim.

"Fine," declared Tubby. "Keep that coat buttoned up an' you'll be nice an' warm."

They were now—it was about 2.30 P. M.—more than half-way in distance from Mercury to Jupiter, Sir Isaac announced.

"Tell us somethin' about Jupiter," said Ameena, sitting down beside Tubby and giving him her little hand to hold. "You said it was a very big Planet."

"It's mean diameter is 87,380 miles," Sir Isaac answered. "Its volume is 1390 times greater than the Earth!"

"Some big Planet," Tubby commented.

Sir Isaac added:

"And it makes one revolution around the Sun in 4332.5 days. Thus its year is equal to 11 years, 314.9 days on Earth."

"My goodness," said Tubby.

"But Jupiter's *day* is only about 9 hours and 56 seconds long. That is because it rotates on its axis so very swiftly."

Tubby interjected:

RADIOGEM

The Dollar Radio Receiving Set

The Simplest Radio Outfit Made —Yet as Practical as the Most Expensive!

You need know absolutely nothing about wireless to operate and enjoy the RADIOGEM. It is so sturdy, so simply constructed that it is small wonder radio engineers who have tested it have pronounced the RADIOGEM a brilliant achievement. The RADIOGEM is a crystal radio receiving set for everyone at a price anyone can afford.

Why The RADIOGEM Can Be Sold For Only $1

Here's the secret: The RADIOGEM Construction eliminates all unnecessary trimmings, cabinets and the like, which do not play any part in the operation of a set. You receive the RADIOGEM unassembled, together with a clearly written instruction book, which shows you how to quickly and easily construct the set, using only your hands and a scissor. The outfit comprises all the necessary wire, contact points, detector mineral, tube on which to wind the coil, etc., etc. The instruction book explains simply and completely the principles of radio and its graphic illustrations make the assembling of the RADIOGEM real fun. Remember the RADIOGEM is a proven, practical radio receiving set and will do anything the most expensive crystal set will do.

The RADIOGEM is the Prize Winner of the Age

Out of hundreds of radio models submitted recently in a great nation-wide contest, radio engineers, the judges, unanimously chose the RADIOGEM as the winner—the simplest radio-receiving set made! And the RADIOGEM costs you nothing to operate; no form of local electricity is required.

Sent Postage Prepaid on receipt of $1 —stamps, money-order or check.

Order Your Radiogem To-day— or send for Free Descriptive Circular

DEALERS

The RADIOGEM is the wonder item of the radio age. It is storming the country, for the RADIOGEM'S price is so low everyone is able to buy one. Write immediately for full particulars before that shop across the street beats you to it.

The RADIOGEM CORPORATION
66-8—WEST BROADWAY
NEW YORK CITY

Hear the programs of the Broadcasting Stations on the RADIOGEM

$1 without PHONE or AERIAL
(Patent Pending)

What They Say About RADIOGEM

I am enclosing herewith $1.00 to pay for the Radiogem. I had it carefully wound by our wireless operator and find that it works beautifully—fully as **good as any crystal set we know of.**

Radiogem received, which we assembled and were very much astonished at results obtained and the clearness and volume of tone produced.

The greatest distances I heard on one of your sets is 1000 miles, having heard WGY at Schenectady, N. Y. I think **your set is the best I have ever sold at any price.**
On an aerial 160 feet long and 20 high one of my customers has heard WOC and WHB, KSD, WMC on one of your sets using a Peerless headset.

Herewith P.O.M.O. amt. $1.00 for another "RADIOGEM." The one received is O.K. Placed about 15 ft. of picture cord under front porch and grounded to a gas meter, and heard the Sacramento Bee and Sacramento Broadcasting Union **much better than with my large crystal set.**

Your RADIOGEM RECEIVER is a wonder. I have received every station in Philadelphia with **it much louder than with a high-priced crystal set.**

Your two Radiogem sets received last night, and one was wired up for testing. WOC is about 40 miles away, and their signals could be heard with headphones on table. After they quit KYW at Chicago about 170 miles east was heard. Every word could be plainly heard here. WMC at Memphis, Tenn., could also be easily heard and understood.
We find that this set does a great deal more than you claim for it. We took WEAR on our audion set last night; this being the Baltimore American Broadcasting station, and then cut in the Radiogem and got excellent results. After the Baltimore concert was over, we continued to use the audion set and about ten o'clock were listening to WEAF—New York—and a little later we disconnected the audion set entirely and hooked up the Radiogem, very clearly hearing both piano music and announcement of name of station and its location.
You claim a radius of 20 miles over your "Radiogem" is sometimes a possibility. You should adhere to the truth. I constructed one for my mother, installed it with an aerial, and she listens not once in a while, but at her will, to Schenectady, Newark, New York, or Providence, R. I., and her home is Attleboro, Mass. **I can't give your set too much praise.**

(Names and Addresses on Request)

WANTED

Railway Postal Clerks

$1600 to $2300 Year

MEN—BOYS 18 or Over
Should Mail Coupon Immediately
Steady Work. No Layoffs. Paid Vacations
Common Education Sufficient
TRAVEL—SEE THE COUNTRY

COUPON

Franklin Institute, Dept. A182, Rochester, N. Y.

Sirs: Send me without charge, (1) specimen Railway Postal Clerk Examination questions; (2) list of government jobs now obtainable. (3) Send list of examination places.

Name .....

Address .....

RADIUM ★ STAR ★ MAP

"IT SHINES AT NIGHT"

Stars are marked so that they shine at night; constellations are indicated by radiant lines. Used and endorsed by leading colleges and universities. Sample Star Group free. 4 ft. map $8.50. Send for one today. (2541)

C. W. SUNDELL, 645 Ontario St., Oak Park, Ill.

ELECTRICAL HANDBOOK

We have prepared a pocket size note book for practical men. Contains drawings and diagrams of electrical machines and connections; over 200 formulas, with problems worked out.
THE BURGESS BLUE BOOK contains drawings for Motor Starters Controllers, Transformers, Reversing Switches, Lighting Circuits, Calculations include Electrical Mathematics, Units, Resistance, Wire Gauge Rules, Ohm's Law, Unknown Resistances, Dynamo Troubles. Also Alternating Current Calculations, finding Impedance, Frequency, Speeds, Power Factor, Formulas for Transformers. Price only $1.00 postpaid on money back guarantee.
AGENTS WANTED. Write for special proposition to agents; can make $10.00 and more a day easy work.
THE BURGESS COMPANY, Consulting Electrical Engineers
745 East 42nd St. Radio Apparatus and Supplies Chicago

Digitized by Google
Original from UNIVERSITY OF CHICAGO

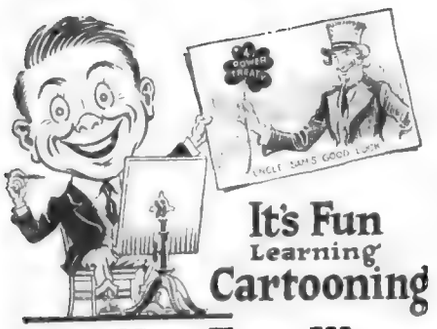

It's Fun Learning Cartooning This New Easy Way

IT'S all like a fascinating game—this new home-study method of learning cartooning. You start with the basic principles of cartoon-making. Then you learn the little tricks of originating cartoon-ideas, the secrets of action, expression, and exaggeration. You progress rapidly through serious cartooning, comics, caricaturing, sport and animated cartooning until almost before you realize it you are drawing striking cartoons that SELL. Many students of this method have sold enough work while taking their courses to pay for them many times over!

Over $100 a Week

Learn cartooning this easy way. Never has the demand for cartoons been so great. Today magazines, newspapers, advertisers and movies use them by the thousands. No matter how poorly you draw now, you can quickly qualify for one of the attractive positions in this fast-growing business.

Just think of earning $3,000 to $20,000 a year for this work that is play. Successful cartoonists often get $25 to over $100 for single cartoons. Then there is the joy of the work itself—the thrill of seeing your own cartoon-ideas in print.

Send For Free Book

Mail coupon today for our handsomely illustrated book which is crammed full of up-to-date interesting facts about cartooning. It gives you an outline of the whole field of cartooning, describes the opportunities for you in this business, and explains in detail all about this new method which makes cartooning so pleasant to learn. Send for it today!



WASHINGTON SCHOOL OF CARTOONING
Room 269
1113-15th Street, N. W.
Washington, D. C.

Washington School of Cartooning
Room 269, 1113-15th St., N.W., Washington, D.C.

Please send me your Free Book on Cartooning, and details of your home-study method.

Name .....
(Please write plainly)

Address .....

City .....State.....

ELECTRIC SOLDERING IRON
$2.28
EVERY RADIO FAN has been looking for this iron for both radio and home use. Operates on A.C. or D.C. current.
GUARANTEED one year. Sent anywhere in U.S. or Canada Parcel Post prepaid on receipt of money order for $2.28.
FANS Send 2c stamp for our list of RADIO BARGAINS
RADIO BARGAINS
17 N. LA SALLE ST - CHICAGO

STAMMER NO MORE
Kill the *fear* of stammering. Re-education the
The widely famed Hatfield Method fully
outlined in an accurate, dependable, worth-
while book—"HOW TO STOP STAMMERING." It
inspired thousands. Free copy today.
INSTITUTE, 109 N. Dearborn, Chicago, Ill.

"This here Jupiter's a re-*mark*-able Planet, ain't it?"

"Go on," said Ameena. "Tell us more."

Sir Isaac seemed embarrassed. "Well to tell you the truth," he said hesitantly, "I don't really know very much about Jupiter. You see I've never really had occasion, up to now, to——"

"Right," interrupted Tubby. He had no wish to be hard on his friend, especially before a girl. "What's the difference? We'll soon be there an' see it for ourselves. . . . When *do* we land, perfessor?"

Sir Isaac looked worried again.

"At our present velocity I calculate we should enter the Jovian atmosphere about 10.15 P. M. tonight, but——"

"Very good, *in*-deed, perfessor."

"But I dare not maintain this velocity," Sir Isaac finished.

"Why not? Ain't we in a hurry?"

"We *are* in a hurry certainly," Sir Isaac conceeded. "But, as you know, the more haste the less speed sometimes. We are now in the region of Minor Planets. More than eight hundred of these little worlds have been discovered and listed, even by those inefficient astronomers of Earth. *I* have never given the subject much attention—except in the case of 'Hector Servadac'—and in *that* story——"

"*We* ain't seen no Minor Planets yet," Tubby hastily interrupted.

Sir Isaac drew him and the girl to the side window.

"There are a dozen or so," he said simply.

Tubby made them out after a moment—very tiny half-moons gleaming among the stars. They were apparently moving upward as the vehicle fell past them, while all the stars appeared quite motionless.

"Some of these little worlds are only from a few hundred thousand to a million miles away from us," Sir Isaac added. "We could reach them with this velocity in a minute or two! They're all around us now—so you can understand what chances we're taking."

Tubby understood indeed; and when, a little later, he saw through the lower window a gleaming disc come into sight, grow to the size of the Moon, and sweep past them to one side and out of sight above them—all in the space of a minute—he was glad enough to have Sir Isaac reduce his speed. It gave the pursuing Mercurian vehicle a better chance to overtake them, of course but even that was the lesser of the two dangers.

The evening was a long one. Tubby and Sir Isaac played cards after dinner, with Ameena an interested spectator. They discussed their Mercurian pursuers a little—the other vehicle had not again appeared. Ameena retired about ten o'clock and Sir Isaac, shortly afterward, lay down at Tubby's feet on the floor of the instrument room.

Tubby faithfully kept watch until two in the morning. Jupiter was now considerably larger than the Moon appears from Earth—a silver disc with broad dark bands on it, and a huge red spot, like a dull red lantern gleaming from its lower hemisphere. The red spot winked and went out shortly after Tubby discovered it.

When Sir Isaac woke up, of his own accord, Tubby, too tired to ask any questions, fell asleep on the floor, wrapped up in a blanket from the vacant bed upstairs. He dreamed he was a railroad train and that Jupiter was flagging him with a red lantern. He wanted to stop, but couldn't. There was a terrible collision. . . .

Tubby opened his eyes to find Sir Isaac shaking him violently.

"All right," he protested, sitting up dizzily. "Lemme alone. What time is it? Ain't we there yet? Where's Ameena? "What's that red light comin' from?"

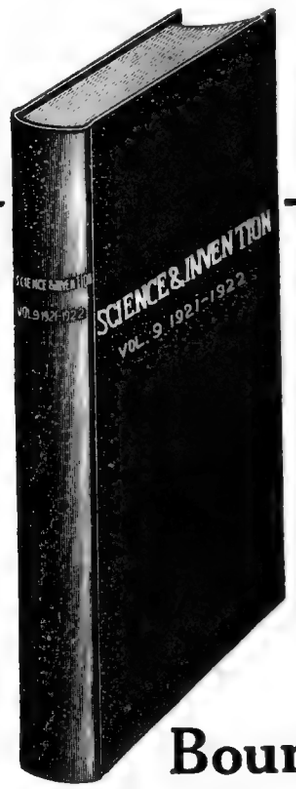

Bound Volume No. 9

May, 1921—April, 1922

CONTAINS

1200 Pages wth over 1500 Illustrations

and

Over 700 Articles by the Foremost American and Foreign Writers

We have also a limited amount of the following Bound Volumes of *Science and Invention* (Electrical Experimenter):

Vol. No. 6—May, 1918, to April, 1919.

Vol. No. 8—May, 1920, to April, 1921.

Each volume bound in stiff board covered with green vellum and gold stamped.

Price for vol. No. 9.....$2.25
Price for vol. 6 or 8..... 2.00

ALL THREE VOLUMES 6.00
Send Express Collect.

EXPERIMENTER PUBLISHING Co.
53 Park Place, N. Y.

Gentlemen:
Enclosed find $.....for which send me bound vol. of S. & I. No. 6 ( ), No. 8 ( ), No. 9 ( ), by express collect.

Name .....

Address .....

Town ..... ***State*** .....

Digitized by Google
Original from UNIVERSITY OF CHICAGO

Garage foreman at $75.00 a week

Positions like this are waiting for men who can fill them. And bigger jobs ahead. Automobile service-stations everywhere need high grade trained men. They want men who are not only good mechanics, but who know **shop management, repair methods, electrical work.** Get this knowledge in a three months complete course at the Michigan State Automobile School, in Detroit the Auto Center.

I can make you a big money man, whether you are now a mechanic or not. Are you mechanically inclined? Then you can succeed in this business. Not necessarily as a mechanic, but as a business man, with a **foundation** of mechanical training. The opportunity is simply unlimited. Over 13 million cars running. 400,000 were made in one month. The service business is enormous.

Write to me today for full information. I can fit you for a good position, or to run a business of your own, as I have thousands of others. Write right now.

A. G. ZELLER, President

MICHIGAN STATE AUTOMOBILE SCHOOL

(Endorsed by the Automobile Industry)

Box 669, 3729 Woodward Ave., Detroit, Mich.

Learn to Write
I TEACH BY MAIL
I can make a good penman of you at your home during spare time, no matter where you live or how poorly you write. My simplified system has shown thousands the way to good penmanship during the past twenty-five years—it CAN and WILL do the same for YOU.
My beautifully illustrated 32-page Book, "How to Become a Good Penman," FREE!
It contains many beautiful specimens of penmanship showing what others have accomplished by the **Tamblyn System,** with testimonials and general information about our courses. (Your name elegantly written on a card if you enclose stamp for postage.) Ladies taught as successfully as men. Write Today. Address
F. W. TAMBLYN,
424 Ridge Bldg., Kansas City, Mo., U.S.A.
F. W. Tamblyn

LEARN RADIO

Here's your opportunity. Radio needs you. Win success in this fascinating field. Trained men in demand at highest salaries. Learn at home, in your spare time.

Be a Radio Expert

I will train you, quickly and easily, to design, construct, install, operate, repair, maintain, and sell all forms of Radio apparatus. My new methods are the most successful in existence. Learn to earn

$1,800 to $10,000 a Year

FREE Wonderful, home-construction, tube receiving set, of latest design. Write for "Radio Facts" free. Engineer Mohaupt.

American Electrical Association
Dept. 69 4613 Ravenswood Ave., Chicago

CHARGE YOUR BATTERY

(RADIO OR AUTO) at HOME for a NICKEL
The HOMCHARGER
POPULARLY PRICED — PAYS FOR ITSELF
SEND FOR FREE BOOK — THE AUTOMATIC ELECTRICAL DEVICES CO. 116 W. THIRD ST. - CINCINNATI, OHIO.

THE TRAVELERS APPROACH JUPITER

It was just six o'clock. A lurid red glare was shining up through the lower window. The room was frightfully hot! Tubby, as soon as he was fully awake, stared down through the heavy glass pane. The dark surface of Jupiter, over which they were poised, stretched out as far as he could see in every direction. Directly underneath the window, like the huge mouth of a red-hot furnace, yawned a gap in the Jovian atmosphere from which lurid tongues of flame were licking upward into Space—venomous, scarlet-red tongues thousands of miles in length.

Tubby was awed as well as alarmed. They were dropping directly into the mouth of Hell!

"Don't be frightened," laughed Sir Isaac from behind Tubby's shoulder. "We're two million miles up yet and falling only at the rate of half a million miles an hour. That is the great red spot of Jupiter. I've always wondered just what it was. Those are tongues of flaming hydrogen. It proves conclusively that Jupiter is more like the Sun than any other Planet. Its surface is not solid on this side, and, as you see, it is internally heated to a very considerable degree."

While Tubby gazed, fascinated, Sir Isaac went on enthusiastically:

"Jupiter is partially self-luminous, which I have also always believed. And, because of its internal heat, the surface temperature is easily warm enough to sustain life, even out here so remote from the Sun."

"That looks absolutely *too* hot to live in," Tubby declared, gazing down into the crater of this mammoth volcano.

Sir Isaac laughed again; evidently he was in high spirits at this complete verification of his theories.

"Of course it's too hot on *this* side. I knew that, but I came around here to see the red spot. We had to follow it around, you see, because of the Planet's very rapid axial rotation. The surface, as I said, isn't solid. Nevertheless, since we know that Jupiter *is* inhabited, however much it would appear *not* to be, there must be at least a small portion of solid surface. We'll go around to the other side again and locate it."

"Like lookin' for land when flyin' over the ocean?" Tubby illustrated.

"Exactly."

Tubby rose to his feet.

"Very good, perfessor. Very good, *in*deed. You navigate us around, an' I'll go wake up Ameena. She mustn't sleep *all* the time. We got to eat."

PASSING ONE OF JUPITER'S SATELLITES

They passed fairly close to Satellite IV, which revolves around its mother globe at a mean distance of 1,162,000 miles. They were then having breakfast, and during the remainder of the meal Sir Isaac entertained them with a most interesting dissertation on the nine satellites of Jupiter.

They were all three dressed as on the evening before, though Ameena had discarded the overcoat. She resumed it after breakfast, however, for when they had passed around over the other hemisphere of Jupiter, beyond the flames of the "red spot," exposed again to the cold of Inter-planetary Space and warmed only by a very small, pale little Sun, the interior of the vehicle rapidly cooled off.

After breakfast, an observation of Jupiter through the lower window showed only dense, black cloud masses.

"Let's go down, perfessor," Tubby suggested. "Can't see nothin' up here through them clouds." He added gloatingly:

"I guess we beat them Mercurians in, all right."

They entered the Jovian atmosphere about eight o'clock—at an altitude of 1,400 miles—

(*Continued on page* 513)

Let an Experienced Newspaper Man Show You How to Break Into the Newspaper Field

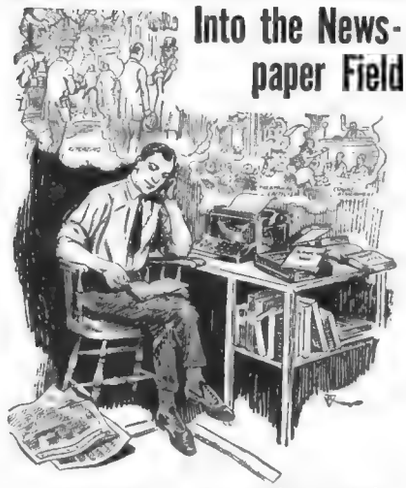

NEWSPAPER work offers countless opportunities for the young man or the young woman who really wants to amount to something. The history of Journalism shows innumerable instances where bright young Reporters have been graduated from newspaper staffs to high places in the industrial and political world. President Harding is an old newspaper man. Thomas W. Lamont, one of the senior partners of J. P. Morgan & Company, was a reporter on the New York Tribune. Senator Walter E. Edge of New Jersey was, and is, an editor; so is ex-Senator James K. Vardeman of Mississippi. Augustus Thomas, America's foremost playwright, was a reporter on the St. Louis Post Dispatch. Arthur Hopkins and Brook Pemberton, theatrical producers, were newspapermen. Arthur Woods, ex-police commissioner of New York, was a reporter. Newspaper work, in itself, is a field that offers unlimited opportunity—and it often leads to better things.

FASCINATING WORK
Salaries of $40 to $125 a week

There isn't any profession that offers the thrill that Journalism does and there is always room for a live, wide awake young fellow in this exciting field. Regular Reporters earn from $40 to $125 a week. Good deskmen on a daily paper are paid from $60 to $100 a week. A "Star" Reporter can always command his own salary.

Part Time If You Prefer

Hundreds of ambitious men and women make extra money by corresponding for newspapers or writing for magazines in their spare time. Many of the most successful reporters of today started in this way. If you have the ability to write, there is always a market for your efforts.

We Will Teach You Journalism At Home

Henry E. Brockmeyer, Assistant City Editor of the New York Evening Post, will give you a thorough training in Journalism in six short easy lessons. Mr. Brockmeyer is well qualified to teach you. He has trained hundreds of men and women, many of whom have, under his guidance, developed into front rank reporters or feature writers.

Mr. Brockmeyer's course in Practical Journalism will train you as the big papers train their staff reporters. The course is complete, authoritative, easy to understand. In it Mr. Brockmeyer has incorporated everything that his long experience of over thirty years in the newspaper field has taught him. It shows not only the way a newspaper is run, giving a detailed explanation of the reportorial and administrative staffs, with the duties of each, but it trains the student in every phase of Journalism, instructing him how to develop a "nose for news", how to write, how to prepare his copy and edit it for publication and drills into him the development of style, with countless references and actual examples.

The complete course comprises six comprehensive lessons just brimful of everything a reporter or correspondent must learn. And it's all interesting reading—more fascinating than any novel. You won't want to stop studying once you start.

Five Days Trial

So confident are we that it is just what you need to learn this profitable profession, that we will send it to you on five days' trial. If at the end of that time you do not feel that you have received more than your ten dollars' worth (the price of the complete course is only $10) you may return it to us at our expense and your money will be immediately refunded. We won't even ask you for an explanation—we guarantee to refund your money in full within twenty-four hours after receiving the lessons back.

Just pin a check, money order or ten dollar bill to your name and address and mail it to us. Then take five days after the course arrives to decide whether you want to keep it or not. You, alone, will be the judge. We know that you will find the course worth many times its price.

THE PRESS GUILD, Inc., 66 W. B'way, N. Y.

THE PRESS GUILD, Inc.,
66 West Broadway, New York City.

Enclosed please find $10 for which you are to ship me at once Henry E. Brockmeyer's complete course in Practical Journalism with the distinct understanding that if I return the course in five days my full $10 will be refunded and no questions asked.

(Name) .....

(Address) .....

(City) ..... (State) .....

Digitized by Google
Original from UNIVERSITY OF CHICAGO

THESE DEALERS CARRY

"Consolidated" Patterns and E.I.Company 25c. Books

See Full Page Ads on Pages 486 and 488

Abilene, Kans.
Union Elec. Co.
Albany, Ga.
Lonsbergs Book House
Akron, O.
Radioart Supply Co.
Albany, N. Y.
Havens Elec. Co.
Ignition Service Supply Co
Cooper & Hutchkiss
Kimball Bros.
Peoples Radio Store
Standard Elec. Co.
Wanger Bros.
Amsterdam, N. Y.
Anderson Elec. Co.
Allentown, Pa.
Hess Bros.
Buchman Book Store
Altoona, Pa.
Altoona Elec. Supply Co.
Anthony, Kans.
LeRoy Highbanks Rad Co.
Astoria, L. I.
Astoria Radio Shop
Atchison, Kans.
Low & Blythe Co.
Atlanta, Ga.
Capital Elec. Co.
Millers Book Store
Atlantic City, N. J.
Paramount Radio Co.
Eastern Hdwe. & Sup. Co.
Sport Shop
Just Elec. Co.
Sea Coast Radio Co.
Auburn, Me.
G. L. Foss
Baltimore, Md.
Jos. A. Becker
Jos. M. Zamoiski
Wilbur Elec Co.
Bacharach Razin Co.
W. W. Hentzchel
S. B. Berkowich
Joel Gutman
Herdas Elec.
Little Joes Dept. Store
C. D. Kellert
J. Meyer
Murdock Co.
E. I. Rosenfeld & Co.
Batavia, N. Y.
H. P. Smith
Bethlehem, Pa.
Lehich Radio Co.
Billings, Mont.
Torgerson Bros.
Birmingham, Ala.
Interstate Elec. Co.
Bluefield, W. Va.
Burgess Elec. Co.
Boston, Mass.
Atlantic Radio Co.
Cutter & Wood Supply Co.
Seth Fuller Co.
International Radio Corp.
Lewis Elec. Supply
F. D. Pitts Co.
Williams Book Stores
J. B. Hunter & Co.
James H. Jones, Inc.
Samuel J. Beckwith
Chandler & Farghuar Co
A. P. Merchant Co.
Eugene Proctor Co., Inc.
Radio Sales & Service Co.
Farrington & Clark
Berman Radio
Bridgeport, Conn.
Morison Radiophone Parts
Flynn & Power
Conn. Radio Supply Co.
Brooklyn, N. Y.
Bklyn. Radio Serv. Co.
O. Olsen
Tollner Elec. Co.
Bklyn. Radio Center
Bobs Radio Service
Bklyn Elec. Lamp & Nov.
Globe Radio & Bat. Shop
Haag & Vince Co.
G. Kleinteich
C. G. Rosewall
J. Streiff
Denmarks
American Phon. Exch.
Arlington Radio Service
Barneys Radio Shop
Bengo Elec. Co.
J. D. Cunningham
Delta Elec. Co.
H. A. Dietz
Duckmans Music Store
Kelley & Feist
Halpern Elec. Co.
Kensington Radio
E. C. & H. B. Lagerholm
G. Moskowitz
G. Scharff Sons
H. Schur & Son
Victor Radio Sport Shop
Walker Elec. Co.
Breuer Bros.
20th Century Radio Co.
M. Ulrich
B. Haupt
David M. Isaac
Starr Radio
Buffalo, N. Y.
McCarthy Bros. & Ford
Robertson Cataract
O. Ulbrich Co.
Burlington, N. J.
Burlington Elec. Co.
Butte, Montana
Montana Elec. Co.
Cambridge, Mass.
Clapp-Eastham Co.
University Book Store
Canton, Ill.
Frank White & Bros.
Camden, N. J.
Neisner Bros.
Carrollton, Mo.
Carrollton Radio Shop
Centerville, Ia.
H. E. Luther
Champagne, Ill.
H. C. Swanell & Son
Charlestown, W. Va.
John R. Koch
Charlestown, S. Car.
S. C. Radio Shop
Charlotte, N. C.
Smith Novotoy Elec. Co.
Caroline Radio Co.
Chester, Pa.
Neisner Bros.
Chicago, Ill.
Harry Alter & Co.
Barawik Co.
Beckley-Ralston Co.
Chicago Radio App. Co.
Elec. Appliance Co.
Inland Elec. Co.
Marshall-Field & Co.
A. C. McClurg & Co.
Montgomery Ward & Co.
Newark Elec. Co.
Henry Paulson & Co.
Sears-Roebuck & Co.
Chicago Cut Rate Book
Community Book Store
Izenstark Radio Co.
Follett Book Co.
McArthur Elec. Co.
P. O. News Co.
Max Stein
E. J. Stringos
Fireside Radio Co.
Cincinnati, O.
Midwest Radio Co.
Milnor Elec. Co.
Reuter Elec. Co.
Cleveland, O.
Radio Electric Shop
Radio Eng. & Sales Co.
H. Lesser & Co.
Oliver C. Schroeder
Radio Sales & Rep. Co.
Columbus, O.
Hall Elec. Co.
Coraopolis, Pa.
T. C. O'Donovan
Cumberland, Md.
J. A. Fulton & Co.
Dallas, Texas
Huey & Philip Hdwe. Co.
Southwest Radio Sup. Co.
Radio Equip. Co.
Denton, Tex.
Evers Hdwe. Co.
Denver, Colo.
Electrical Auto App. Co.
Pratt Book Store
Reynolds Radio Co.
Des Moines, Ia.
H. W. King
Iowa Radio Co.
Detroit, Mich.
Federal Elec. Supply Co.
Twentieth Century Radio Co.
Crowley Milner Co.
McCaulay Bros.
Detroit Elec. Co.
Wolverine Radio Co.
Northwestern Radio Co.
Duluth, Minn.
Kelley Duluth Co.
Easton, Pa.
F. & W. Grand Stores
E. Orange, N. J.
Essex Radio Shop
United Radio & Sport Shop
Elizabeth, N. J.
H. Richmond & Son
Elizabeth Elec. Sup. Co
Eureka, Ill.
Klaus Radio Co.
Fergus Falls, Minn.
Grande & Sether
Far Rockaway, L. I.
Dunlap Sptg. Goods Co.
Scientific Radio Co., Inc.
Flushing, L. I.
The Electric Shop
Ft. Worth, Tex.
H. C. Meacham Co.
Galveston, Tex.
Galveson Wireless Sup. Co.
Gardner, Mass.
Gardner Hdwe. Co.
Gloucester, N. J.
Lenny's Variety Store
Granite City, Ill.
Rosenberg Dept. Store
Great Bend, Kans.
Great Bend Radio Co.
Greensburg, Pa.
H. Hamilton
Hamilton, O.
Radio Co.
Hartford, Conn.
Elec. Sup. & Equip. Co.
F. & W. Grand Stores
G. Fox & Co.
Havana, Cuba
Diamond News Co.
Liberia de Jose Albele
Helena, Mont.
Van Blaricom Co.
Hoboken, N. J.
International Book Store
Egans Radio
Holyoke, Mass.
Haskell Elec. Co.
Independence, Mo.
The Melodian Co.
Hackensack, N. J.
Wurtz & Fuchs
Jacksonville, Fla.
Southern Elec. Co.
Holt Elec. Co.
Jamestown, N. Y.
Willis Switch & Inst. Co.
Jamaica Plain, Mass.
Conrad Radio Co.
Jamaica, L. I.
Scientific Radio Co., Inc.
Merrick Elec. Co.
Jersey City, N. J.
Arrow Elec. Co.
M. Schlein
Guarantee Elec. Co.
Johnson City, Tenn.
Bishop Elec. Co.
Johnstown, Pa.
W. T. Grant Co.
Joliet, Ill.
Joliet Book & Sta. Co.
Kansas City, Mo.
Vulcanizers Supply Co.
Donaldson Radio Co.
Lancaster, Pa.
Radio Outfit. & Sup. Co.
Lawrence, Mass.
Schwarzenberg, W.
Los Angeles, Cal.
Leo J. Meyberg
S. California Elec. Co.
West Radio Elec. Co.
Radio Concert & Equip.
Natick Book Store
Brode Elec. Co.
Lewiston, Montana
Chas. Williams
Lock Haven, Pa.
Burkett Bros.
Louisville, Ky.
Sutcliffe Co.
Lowell, Mass.
G. A. Hill Co.
Lyons, Kans.
R. I. Case
Macon, Ga.
J. W. Burke Co.
Memphis, Tenn.
Street Elec. Co.
McKeesport, Pa.
F. C. Wampler & Son
Milwaukee, Wis.
Julius Andrae & Co.
Dewey Sport Goods Co.
Badger Radio Co.
Minneapolis, Minn.
Jacob Andressen Co.
Findley Elec. Sup. Co.
Nagell Hdwe. Co.
Reinhard Bros. Co., Inc.
Sterling Elec. Co.
Peerless Elec. Co.
Missoula, Mont.
Missoula Elec. Sup. Co.
Montgomery, Ala.
Alabama Radio Mfg. Co.
R. P. Reeves
Nashville, Tenn.
Zibart Bros.
Newark, N. J.
Bamberger & Co.
Bassett Radio Sup. Co.
Davis Elec. Co.
Eddies Wireless Ex.
Bannister & Pollard
Essex Mfg. Co.
W. T. Grand Co.
United Elec. Sup. Co.
Friedmans Music Shop
Mt. Vernon, N. Y.
Stephens Shop
New Brunswick, N. J.
Schneider Bros.
The Elec. Shop
New Orleans, La.
Interstate Elec. Co.
Newport, R. I.
Geo. H. Chase
New Haven, Conn
W. W. Gale & Co.
New York City
Fenno & Co.
Frank Radio Co.
Fremont Radio Co.
J. J. Kelleher
David Killoch & Co.
Liberty Radio Co.
R. H. Macy & Co.
Manhattan Elec. Sup.
Overland Radio & Equip Co.
Peerless Light Co.
Radio Specialty Co.
Stanley & Patterson
Viking Radio Co.
The Winchester Store
Army & Navy Dist. Co.
Chamberlain Elec. Co.
Economy Radio
Elec. Service Eng. Co.
Goldfinger Bros.
Gimbel Bros.
R. G. Haslinger
Herbert & Huesgen
Allied Radio Co.
J. Belmuth
J. H. Bunnell & Co.
Butler Bros.
Carnahan & Dalzell, Inc.
Bway. Radio Corp.
P. M. Dreyfuss Co., Inc.
Delta Elec. Co.
Fordham Radio Spec. Co.
F. & W. Grand Stores
J. L. Lewis & Co.
Lowe Motor Sup. Co.
Rova Radio Stores
Live Wire Elec. Co.
Marks Radio
Modelis—8 Stores
Phillips Sport Shop
Wehman Bros.
A. & A. Elec. Co.
Acme Radio Co.
Am. Elec. Tech. App.
Atlas Elec. Supply Co.
Atlas Radio Co.
Bergmaier Bros.
Franklin Radio Shop
J. Gabler
Globe Radio Shop
Hygrade Elec. Co.
International Radio Store
J. Kelleher
Marlen Hdwe. Co.
Nassau Radio Co.
Times Sq. Auto Sup. Co.
Triggers
Ace Elec. Co.
A. & P. Radio Co.
Baker & Taylor Co.
Borough Elec. Co.
Combia Elec. Co.
J. Edelson
Keystone Battery Service
S. S. Kresge & Co.
Langers Radio Store
A. Marcus
G. H. Masten & Co.
Mentz Store
Milbro Radio & Elec. Co.
Radio & Mech. Trad. Corp.
Radio Parlor
Radiophone Equip. Co.
New Eng. Elec. Spec. Co.
Rialto Elec. Shop
St. Marks Radio Co.
K. R. Schullstrom
F. E. Silverman
Woelfer
M. Worksman
Perfection Radio
Portlandt Radio
James Gear
A. J. Goldman
T. Eaton & Co.
Cross Radio Co.
Progressive Book Store
S. Astor
M. & T. Elec. Co.
Borough Elec. Co.
Marvel Elec. Sup. Co.
O. R R.
A. E. Zimmerman
Sam Astor
Davidson Radio Co.
Van Auto Supply Co.
Mogul Elec. Co.
Brunswick Supply Co.
Stuyvesant Radio Co.
Oscars Radio
Fordham Sup. Co.
Int. News Co.
M. H. Elec. Co.
The Heights Radio Sup. Co.
Eclipse Elec. Co.
Fordham Radio Co.
Crescent Radio Co.
Terminal Rad. & Mus. Shop
United Anchor Tire Co.
Inter City Radio Co.
Josephson
Redfon Corp.
Greenwich Radio Co.
H. Goldstein
Isador Fajans, Inc.
Grand Radio
M. Rubin
Haines & Co.
Madison Hdwe. Store
American Radio Co.
American Elec. Test. Co.
Electrical Eng. & Con. Co.
Niagara Falls, N. Y.
H. Messersmith & Sons
Norristown, Pa.
E. M. Law
Oakland, Cal.
Warner Bros.
E. M. Sargent Co.
Omaha, Nebr.
Wolfe Elec. Co.
Onset, Mass.
W. C. Spring
Passaic, N. J.
J. L. David
Simon Bros.
Passaic Radio Shop
Perth Amboy, N. J.
Smerling, J.
Amboy Lighting Co.
Amboy Radio
Paterson, N. J.
Federal Radio & Elec. Co.
Pawtucket, R. I.
Delancey Felch & Co.
Peoria, Ill.
Peoria News Stand
Philadelphia, Pa.
Gimbel Bros.
H. C. Roberts El. Sup. Co.
Sayre Level Radio Co.
Goetz Music Stores
F. & W. Grand Stores
E. P. Noll & Co.
G. W. Snell Co.
Neisner Bros.
Schimmel Elec. Co.
Radio Sales Co.
John Wanamaker
Phoenix, Ariz.
Nielson Radio Sup. Co.
Poughkeepsie, N. Y.
C. P. Raymond
Pittsburgh, Pa.
Goldsmith & Son Co.
Ludwig Hommel & Co.
Gain-a-Day Elec. Co.
Liberty Incan. Sup. Co.
Pitts Radio & App. Co.
U. S. Radio Co. of Pa.
Doubleday Hill Co.
Pittsfield, Mass.
W. T. Grant Co.
Plainfield, N. J.
H. E. Gayle Hdwe. Co.
Plattsburgh, N. Y.
H. E. Atwater
Portland, Me
Chisholm Bros.
Portland, Oreg.
E. L. Knight Co.
Hynson Elec. Co.
Hylands Old Book Store
Pottstown, Pa.
Pottstown Radio Sup. Co.
Princeton, N. J.
Princeton Cycle Shop
Providence, R. I.
B. & H. Supply Co.
The Shepard Co.
R. I. Elec. Equip
The Outlet Co.
Boston Store
Reading, Pa.
F. & W. Grand Stores
Rochester, N. Y.
Hickson Elec. Co.
Rochester Elec. Sup. Co.
Wheeler Green El. Sup. Co.
Eastman Radio Co.
R. Schmidt & Co.
E. C. Sykes & Co.
Neisner Bros.
Miller Drug & Elec. Co.
Ridgewood, L. I.
Ridgewood Radio Shop
Rock Island, Ill.
H. E. Gelhart & Co.
Reardsley Specialty Co.
Valle Co.
St. Joseph, Mo.
Empire Elec. Co.
Mannschrecks Book Stores
St. Louis, Mo.
The Benwood Co.
Linze Elec. Supply Co.
Foster Book & Cigar Co.
St. Paul, Minn.
North-West Elec. Eq Co.
Premier Radio Mfg. Co.
Pioneer Elec. Co.
St. Paul Book & Sta. Co.
Crist Book Shop
San Francisco, Cal.
Richter, Conrad
Schenectady, N. Y.
Albany St. Radio Store
Seattle, Wash.
F. B. Wilson
Stamford, Conn.
Arthora
Stillwater, Okla.
Stillwater Elec. Shop
Syracuse, N. Y.
Grant's Alexander Sons
Hughes Radio Corp.
M. H. Salmon Elec. Co.
Toledo, O.
Kuebler Radio Co.
W. J. Nagel Elec. Co.
Trenton, N. J.
Fleron & Son, Inc.
Radio Chain Stores
Troy, N. Y.
L. H. Cooper & Son
Tyler, Tex.
R. E. Bryan
Union Hill, N. J.
N. W. Friedman
Uniontown, Pa.
Frederick Piano Co., W. F.
Utica, N. Y.
Dent, Co., M. F.
Olds Book Store
Utica Elec. App. Co.
Utica Elec. Sup. Co., Inc.
Waco, Tex.
Jackson's Radio Eng. Lab.
Washington, D. C.
Continental Elec. & Sup. Co.
Radio Auto Sup. Co.
Wartertown, Wis.
D. & F. Kusel Co.
Watertown, N. Y.
F. A. Empsall & Co.
W. Hoboken, N. J.
The Heraco Exchange
W. New York, N. J.
W. N. Y. Heraco
Wheeling, W. Va.
Gee Electric Co.
Wapakoneta, Ohio
Heine & Nagel Elec. Co.
Waupaca, Wis.
Waupaca Radio Sales Co.
Wausau, Wis.
Janke, Kurth Co.
Wilkes-Barre, Pa.
Foster Radio & Elec. Co.
Wilmington, Del.
L. P. Moore
Wilmington Elec. Spec. Co.
Worcester, Mass.
Neisner Bros.
Williamsport, Pa.
Wilhelm Book Store
Yonkers, N. Y.
Knepfer, F.
Westchester Elec. Eq. Co.
York, Nebr.
Bullocks
Youngstown, Ohio
Robert F. Phillips

Order direct from these dealers. If your dealer cannot supply you, send us his name and address

233 Fulton Street, New York City

The Consrad Co INC.

Publishers of Consolidated Patterns
Sales Agents for E. I. Co. Books

Digitized by Google Original from UNIVERSITY OF CHICAGO

RHAMSTINE*

Electric Soldering Iron

For Home or Laboratory

Specially designed for radio fans and experimenters. Attractively finished in nickel; heating element Nichrome resistance wire; soldering tip; when worn out, can be quickly and cheaply renewed. Complete with 6 ft. cord, two piece plug, and self-fluxing solder. Used with either D.C. or A.C. Guaranteed one year. And like all Rhamstine* products, quality is combined with low price

$2.50 Postpaid Complete with Cord, Plug and Solder

You've always wanted an electric soldering iron; you need one for radio work; and here's your opportunity to get one specially adapted to the purpose. The Rhamstine* name guarantees quality and satisfaction.

Send only $2.50 and we'll send it post paid; or if you prefer, we'll send it Parcel Post, C.O.D.

J. THOS. RHAMSTINE*

*Maker of Radio Products

2160 East Larned St., Detroit, Mich.



MIRACO GETS 'EM 1500 MILES AWAY

At the low prices shown below you get the efficiency of sets costing three times as much.
These radio frequency receivers—pick up stations over 1500 miles away under good conditions—everywhere. Operate either on DRY CELLS or storage battery. Cabinets of solid mahogany and workmanship the finest throughout. Order direct or send for bulletin.

Two tube outfit, as shown above, headphones only $29.50
Four tube outfit for loudspeaker or headphones 54.50

DEALERS—AGENTS
Write for proposition quickly—its a winner.

THE MIDWEST RADIO COMPANY
809 Main St. Cincinnati, Ohio



"Read'em" Binding Posts

With Knobs That Won't Come Off

Anyone can "read 'em." All popular styles—Antenna, Ground, Fones, A and B Battery plus and minus—abbreviations of different names engraved on knobs. Ask your dealer for "Read 'em" the kind for real Radio fans. If your dealer does not have them write direct.

The Marshall-Gerken Co.
Manufacturers
Dept. G. Toledo, Ohio

W.T.501 DETECTOR TUBE

$2

For tube sets, use our special Adaptor, 75c extra. To convert crystal sets into tube sets, use special socket, 40c extra.

RADIO RESEARCH GUILD
Radio Research Guild
Newark, N. J.

SIGNAL

SIGNAL RADIO

Signal Radio Apparatus has long endured strenuous service by government, professional, and commercial users, *as well as by beginners.* Costs no more than experimental kind. Send for Catalog of complete sets, parts and accessories

SIGNAL ELECTRIC MFG. CO., 1911 Broadway Menominee, Mich.

Around the Universe

(*Continued from page* 511)

a depth of air strata that surprised even Sir Isaac. Inky blackness surrounded them for a time. At 110 miles they emerged into daylight. Later all the clouds swept away. The pale Sun shown through the side window, rising over the horizon—for it chanced to be early morning on this portion of the mighty Planet—shortly after dawn of a clear, frosty-looking Jovian day.

"Looks awful chilly out," Tubby remarked dubiously.

"Yes," agreed Sir Isaac. "We would be freezing in here now if it were not for our friction in passing through the atmosphere. I have shut off our heating apparatus. . . . It will be much warmer down below, however. The internal heat of Jupiter warms its lower stratas of air."

At an altitiude of 25,000 feet they could distinguish quite plainly the Jovian landscape over which they were passing horizontally—a barren land that looked as though it might be thick black water and mud. It seemed to boil very sluggishly in spots. Here and there it appeared firmer—and there were curious vegetable growths as near like two hundred foot mushrooms as anything else Tubby could think of.

JOVIAN CITIES APPEAR

The landscape was changing constantly. Now they came over a barren, almost rocky land, with enormous trees like pines and cedars. Half an hour later the forests began occasionally to be dotted with cities—mammoth buildings rising in terraces two thousand feet into the air. . . . Everything seemed built on the same gigantic scale.

They selected, quite at random, one of the largest of the cities; and descended in an open space nearby. It was 9.50 A. M. when they came to rest upon the surface of Jupiter—a flight from Mercury, smallest major planet of the solar system, to Jupiter the largest of exactly 34 hours and 5 minutes.

THE SKY PARTY MEET THE GREAT MOGUL

The audience with the Great Mogul of Jupiter—who came riding out of the city with his Wise Men on an enormous animal—like a queer-looking elephant with broad, very flat feet—took place about 12 o'clock noon Earth Eastern time, though it was by then late afternoon of the Jovian day.

It may seem remarkable that so great a dignitary would go to his visitors rather than bidding them come to him. The answer however, is obvious to any thinking student. Tubby and Sir Isaac had flatly refused to allow themselves to be carried; and since gravity on the surface of Jupiter is more than 2½ times that of the Earth, they could hardly stand on their feet, much less walk!

The Great Mogul was a towering giant some fifteen feet tall, with his Counsellors in proportion. A robe of richly-colored cloth fell in folds to his feet. There were ropes of enormous gems about his neck—that is to say they might have been considered gems, though they looked more like little gargoyles moulded out of red and green putty and his braided white beard hung down his chest to his waist.

(*To be continued.*)

NEW CAMERA NEEDS ONLY 10-MILLIONETH OF SECOND

Through an apparatus operated by revolving mirrors, Dr. J. A. Anderson, a member of the staff of Mount Wilson Observatory, can take a photograph with an exposure of one ten-millionth of a second.

562 page RADIO BOOK only $1

Compiled by
HARRY F. DART, B.S.E.E.
Formerly with the Western Electric Co., and U. S. Army Instructor of Radio

Technically edited by
F. H. DOANE

Just off the press

THE greatest book on Radio ever written. Price only $1. Filled with sound, practical, tested information for every radio fan, from beginner to hard-boiled owl. Written, compiled and edited by radio experts of national reputation.

Every page tells you something useful. And there are 562 pages! More than 150 illustrations and diagrams! Note this partial list of contents:

Different types of receiving and sending hook-ups, electrical terms, condensers, oscillating circuits, coupled circuits, induction coils, antenna systems, electric batteries, generators and motors, protective devices, crystal detectors, arc generators, transmitters, filters, wavemeters, radio experiments, International and Morse codes, commercial receiving sets, tables and data, radio transmitting and broadcasting stations (with call letters), Radio License Regulations, etc.

A pocket course in RADIO

You may dip into this I. C. S. Radio Handbook at random, or hunt up special information you want, or read it right through. It's interesting—fascinating—profitable! Hundreds of suggestions for helping you get more pleasure out of Radio. Will save you from wasting money on things that won't work. Money back if not satisfied.

Send $1 to-day and get this 562-page I.C.S. Radio Handbook before you spend another cent on parts.

International Correspondence Schools
Box 6202-C
Scranton, Penna.

I enclose One Dollar. Please send me—postpaid—the 562-page I C S Radio Handbook. It is understood that if I am not entirely satisfied I may return this book within five days and you will refund my money.

Name .....

Address .....

Mail the coupon TO-DAY

FREE

RADIO CATALOG

Of Standard Quality Parts
AT REDUCED PRICES

Our Guarantee Protects You

Write for our Catalog No. 100

GREAT LAKES RADIO CO.
136 W. LAKE STREET, CHICAGO, ILL.

Insure your copy reaching you each m[illegible] by subscribe to Science and Invention—$3 Experimenter Publishing Co., 53

Digitized by Google

Original from UNIVERSITY OF CHICAGO

The Proper Finish Makes New Furniture Harmonize With the Old

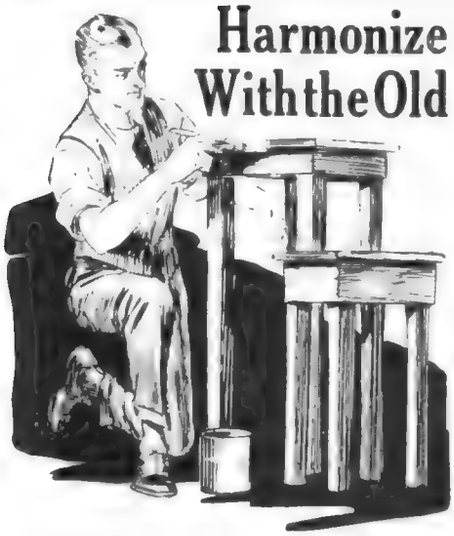

SMALL odd pieces of modern furniture add greatly to the attractiveness of every home. You, yourself, can easily make them for your family. There is no particular trick to constructing porch swings, tables, telephone sets, etc. You can give your work a beautiful finish with

JOHNSON'S WOOD DYE

Johnson's Wood Dye is very easy to apply—it goes on easily and quickly, without a lap or a streak. It penetrates deeply bringing out the beauty of the grain without raising it—dries in 4 hours and does not rub off or smudge. Made in fourteen beautiful shades.

FREE-This Book on Home Beautifying

This Book tells how to finish wood in artistic stained and enameled effects. Gives practical suggestions on making your home artistic, cheery and inviting. Tells just what materials to use and how to apply them. Includes color card—gives covering capacities, etc. Use coupon below.

S. C. JOHNSON & SON, Dept. SI 9.
Racine, Wis. (Canadian Factory—Brantford)
Please send me free and postpaid your Instruction Book on Home Beautifying and Wood Finishing.
The best dealer in paints here is.....
.....
MY NAME .....
MY ADDRESS .....
CITY & STATE .....

Dr. Hackensaw's Secrets

(*Continued from page* 504)

second your wheel must revolve 350 times per second! You surely cannot obtain such a speed as that!"

"Certainly I can. It is just a matter of gearing. Many small wheels in machinery travel more than 350 revolutions per second. But I have a plan that will enable me to run this wheel at a much lower speed. Do you notice the wheel itself revolves over a very deep excavation?"

"Yes, I was wondering what that deep hole was for."

"That is to enable me to increase the diameter of the wheel without increasing it."

"What?" cried Silas, puzzled.

"To be plain, there are serious objections to having the wheel too large, as it would tend to fly apart at the high speed of revolution. On the other hand it must not be too small or the dizzy whirling motion might kill the passengers. So I have devised the following method. I have a very long and very strong chain wound on a windlass anchored to the rock itself. The free end of this chain passes through the axle of my Ferris wheel, up through a hollow spoke and is there attached to the bottom of the car. This chain therefore, encased in a swivelled tubing to avoid twisting, can be gradually let out as the wheel increases in speed. The centrifugal force makes the car move away from the wheel, but it is held by the chain. Gradually as I let the chain out the car describes larger and larger circles. In this manner with a small wheel revolving at a moderate speed, I can obtain the same effect as with a large wheel, and without the attending disadvantages. I use electricty for my motive power and use some ball-bearings, but wherever possible, in order to reduce friction I use a stream of compressed air for the bearings—a little invention of my own."

"I suppose you have to aim your car ahead of the moon," remarked Silas.

SEVEN FACTORS TO CONJURE WITH

"The problem is by no means so simple as that," retorted the doctor. "As a matter of fact, I don't aim anywhere near the moon. Seven factors have to be taken into consideration in aiming the car. First there is the rotation of the earth. The earth revolves on its axis every day. A body at the equator if shot off from the earth would have this centrifugal speed of 1,000 miles per hour in a straight line tangent to the earth. But I see you don't understand. Here is a diagram that will help you. When a body, which is revolving in a circle, is suddenly allowed to fly off, it flies off at a tangent. Thus in the diagram, a body released at either, A, B, C or D will fly off in the direction of the arrow For the same reason, the direction my car will take will depend largely on the time of the day at which it is released. If released at noon this speed of one thousand miles per hour will be in exactly the opposite direction to what it would be if the car were released at midnight.

"The second factor is similar and depends upon the speed of the earth in its revolution around the sun Here too, the car will fly off at a tangent to the orbit, at a speed of nine miles per second, the direction depending on the day of the year and the time of the day. The third factor of course depends on my revolving wheel. From this, too, [illegible] will fly off at a tangent, its dire[illegible]g upon its position on the w[illegible]d."

[illegible]ed Silas puzzled, "How [illegible] in three different direc-

Send for FREE story

Interesting, illustrated folder "How to get Greater Desk Efficiency" shows how to keep your desk cleared for action. Thousands of Kleradesks are giving entire satisfaction. Saves time locating, distributing or sorting papers. Takes less space than a tray. Sent FREE trial.

Kleradesk

ROSS Gould Co
309 N. 10th
ST. LOUIS

Mailing Lists

Will help you increase sales

Send for FREE catalog showing details covering names of your best prospective customers. Counts and prices are given on thousands of different Mailing Lists.

99% Guaranteed by refund of 5¢ each

ROSS-Gould Co 309 N 10th Street St. Louis

No Sun to Point the Way

Can't always depend on "Old Sol" to lead you right. Carry one of the nine styles of

TAYLOR COMPASSES

Your dealer has them and will quote prices.

Taylor Instrument Companies
Rochester, N. Y.

There's a *Taylor* or *Tycos* Thermometer for Every Purpose.

E-5

Electrical Engineering men with training are in demand. For more than a quarter of a century this school has been training men of ambition and limited time for the electrical industries. Condensed course in Electrical enables graduates to secure good positions and promotions. Theoretical and Practical Electricity Mathematics, Steam and Gas Engines and Mechanical Drawing. Students construct dynamos, install wiring and test electrical machinery. Course with diploma complete

In One Year

Over 3000 men trained. Thoroughly equipped fireproof dormitories, dining hall, laboratories, shops.

Free catalog. 31st year begins Sept. 26, 1923

BLISS ELECTRICAL SCHOOL
108 TAKOMA AVE., WASHINGTON, D. C.

MAKE MONEY AT HOME

YOU CAN earn $1 to $2 an hour writing show cards at home in your spare time. Quickly and easily learned by our new simple "Instructograph" method. No canvassing or soliciting. We show you how, guarantee you steady work at home, no matter where you live, and pay you cash each week. Full particulars and booklet free. Write to-day.

AMERICAN SHOW CARD SYSTEM LIMITED
Authorized and Fully Paid Capital, One Million Dollars
110 Adams Bldg Toronto, Canada.



LATHES

9 to 18-inch Swing

List price $135.00 and up according to size. When ready to buy, send for Lathe Catalog and prices.

W. F. & John Barnes Co.
442 Ruby Street
ROCKFORD, ILLINOIS

PROTECT YOUR TUBES

Trade "Vac-Shields" Mark

Stop Howling, Prevent Electro-Static Noises. Make DX Tuning easy, and protect tubes from damage.

Shipped direct from our laboratories Postpaid on receipt of $1.00 or C.O.D., $1.15

Orange Research Laboratories
41 N. 16th Dept. 12 East Orange, N. J.

Digitized by Google Original from UNIVERSITY OF CHICAGO

The Standard "All-American" Transformers

Radio and Audio Frequency

now being used in radio sets manufactured by leaders in the industry.

These manufacturers have expended a great deal of time and money in the testing of transformers to give best results. They can not afford to take chances. Their preference of "All-American" Transformers is your guide to real satisfaction.

Ask your dealer to show you "All-American" Transformers.

Radio Frequency Transformer

Audio Frequency Transformer

Free Offer

Book of Hook-Ups containing twenty-five successful circuits. Send 2c stamp to cover postage.

RAULAND MFG. CO.
200 No. Jefferson St., Chicago, Ill.

It's Easy To Build Things with a Junior Bench Saw



Does your ripping, mitering, grooving, rabbeting, tenoning, sanding, grinding and many other operations with surprising ease and accuracy. Top 10"x13". Saws 1½" stock. Dadoes ⅝"x⅝". Machine built entirely of metal. Driven by ¼ or 1/3 h. p. motor. Portable. Attaches to any light socket. Extremely accurate.

Descriptive circular tells many things of interest to workers in wood and soft metals.

W. & J. BOICE, Dept. S. I. 9, Toledo, Ohio

EARN MONEY AT HOME

YOU can make $15 to $60 weekly in your spare time writing show cards. No canvassing or soliciting. We instruct you by our new simple Directograph system, pay you cash each week and guarantee you steady work. Write for full particulars and free booklet.

WEST-ANGUS SHOW CARD SERVICE LIMITED
Authorized Capital $1,250,000.00
67 Colborne Building Toronto, Can.

CHARGE YOUR OWN BATTERY

You can do it—without removing your battery or even disconnecting terminals. The Valley Battery Charger will end your battery troubles. Plugs in on lamp socket; clamps to battery. Cannot overcharge or harm battery. Price $18.00. *Send for booklet.*

Valley Electric Company
Department S. ST. LOUIS, MO.

DEAFNESS IS MISERY

I know because I was Deaf and had Head Noises for over 30 years. My invisible Antiseptic Ear Drums restored my hearing and stopped Head Noises, and will do it for you. They are Tiny Megaphones. Cannot be seen when worn. Effective when Deafness is caused by Catarrh or by Perforated, Partially or Wholly Destroyed Natural Drums. Easy to put in, easy to take out. Are "Unseen Comforts." Inexpensive. Write for Booklet and my sworn statement of how I recovered my hearing.

A. O. LEONARD
Suite 369, 70 5th Avenue -- New York City

LEARN WATCH REPAIRING

You can learn by our modern and original system of instruction every part of the Watch Repairing Trade at home as good or better than at a shop. You can earn money while learning and secure a well paying position or start in business after completing our course of instruction. Good watch repairers are always in demand and earn from $30 to $65 per week. For particulars apply to the

MILWAUKEE SCHOOL OF WATCH REPAIRING. 168 Mason St., MILWAUKEE, WIS

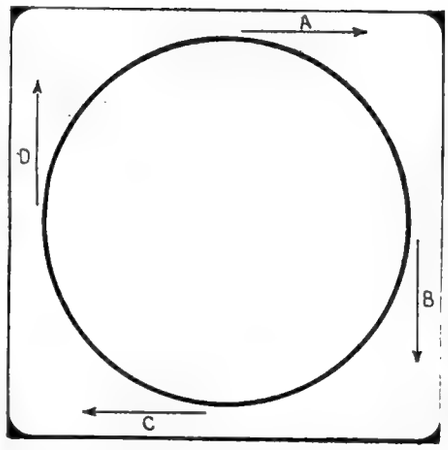

Diagram Showing How a Revolving Body Released at A, B, C, or D Will Fly Off at a Tangent

"These three tangents are all straight lines. When a body is acted upon by three such forces it takes a diagonal course—the average of the three. This is what is known as the law of the composition of forces.

"The next three factors are the attraction exerted on the car by the earth, by the moon, and by the sun. These attractions change as the car moves, hence these forces would each move the car along a curved line. When all six forces are combined the path of the car will also be a curve. The seventh and last important factor to consider is the resistance of the air. The car's flight will be greatly retarded when passing through our atmosphere. Hence this, too, must be allowed for in aiming the car.

"How long will it take your car to reach the moon?"

"The distance is about 240,000 miles. At seven miles per second the speed would be about 25,000 miles per hour. In other words we should reach the moon in less than 10 hours if this speed were maintained. As however the speed continually decreases, owing to the earth's pull backwards, until the car has reached the neutral spot between the earth and the moon and there slowly increases again owing to the increasing attraction of the moon, the calculation of the time required for the trip is rather complicated. I allow for four days, which ought to be more than sufficient. I am running no chances, however, but am taking enough provisions and liquid air to last me for a month."

THE MOON CAR

"Doctor," said Silas, "I notice that your car has accommodation for two passengers. May I ask whom you are sending?"

"I am sending no one."

"You, yourself, are going, then? But how will you get back from the moon?"

"I don't know. The probabilities are that I shall never get back. But I have a wireless apparatus on board capable of sending radio messages from the moon. I have over a month's supply of air, water and provisions. Even if I pay for the trip with my life, I hope to be able to send home descriptions of inventions I see there, and that will far out-balance any scientific research work I could accomplish on the earth."

"When do you start?"

"I start on Thursday of next week."

"Doctor," cried Silas excitedly. "I am going with you!"

"I thought as much," replied Doctor Hackensaw, shaking the reporter warmly by the hand.

And thus these two men, as much for the interests of science as for the love of adventure, cooly resolved to risk their lives in one of the most novel and exciting enterprises ever undertaken by man.

(Don't Miss the Next Installment.)

Now

FREE

Let me send you this great book. Learn all about the wonderful electrical industry and how you can easily learn to earn $3,500 to $10,000 a year.

BE A CERTIFICATED Electrical Expert

EARN $70 to $200 A WEEK

No matter what kind of work you are doing now, or how much you earn, electricity *offers you more*—a better job and bigger Pay is waiting for you. Trained Electrical Experts (not common screw driver electricians) are in great demand at the *highest salaries ever known*. The opportunities for advancement and a real success are amazing. The enormous growth of the electrical industry snaps up men *faster than they can be trained*.

EASY TO GET $3,500.00 to $10,000.00 A YEAR

I will train you at home in your spare time to earn this fine big pay. In just a few short months you will be ready for a wonderful job that I will help you get. Lack of education or experience doesn't bar anyone. My simplified, up-to-the-minute, easily learned course, backed up with my 20 years of engineering experience, guarantees your success.

—Outfit Free—
Electrical Tools and Material

I will give you free a whole outfit of electrical tools, material, measuring instruments and a real electric motor—not toys, but the real things, such as *no other school* has ever offered before. I will start you right in after your first few lessons doing practical work, in a practical way—work that will pay you extra money while you are learning and from $3,500 to $10,000 a year when you are trained.

SATISFACTION GUARANTEED

I don't merely promise you these things—I *guarantee them*. I send you a signed bond guaranteeing to return your *whole* tuition fee—*every penny* you pay me—if you are not 100% satisfied after finishing my course.

Mail Coupon Now--Save $45.50

Send me this coupon and I will mail you a $45.50 credit check, (for limited time only). My big illustrated book and the "Vital Facts of the Electrical Industry," including my Free Outfit Offer. Mail the coupon today while the special reduced price is in effect.

L. L. COOKE, Chief Engineer
Chicago Engineering Works
Dept. 526 CHICAGO

L. L. COOKE, Chief Engineer
Chicago Engineering Works
Dept. 526, 2150 Lawrence Ave., Chicago, Ill.

Send me free and without obligation on my part, your book "How to Become an Electrical Expert," your Free Outfit Offer, Proof Lesson, and all particulars of your course, including the $45.50 Credit Check.

Name .....

Address .....

Occupation .....

Digitized by Google Original from UNIVERSITY OF CHICAGO

Opportunity Ad-lets

YOU will find many remarkable opportunities and real bargains in these columns. It will pay you to read and investigate the offerings made every month by reliable firms, dealers and amateurs from all over the country. No matter what you may be seeking, whether supplies, automobile accessories, the opportunity to make money, or anything else, you will find listed here the best and most attractive specials of the month.

Advertisements in this section twelve cents a word for each insertion. Name and address must be included at the above rate. Cash should accompany all classified advertisements unless placed by an accredited advertising agency. No advertisement for less than 10 words accepted.

Ten per cent. discount for 6 issues, 20 per cent. discount for 12 issues. Objectionable or misleading advertisements not accepted. Advertisements for the November issue must reach us not later than September 15.

The Circulation of Science and Invention is over 160,000 and climbing every month

EXPERIMENTER PUBLISHING CO., INC., 53 Park Place, New York City, N. Y.

Agents Wanted

Salesmen interviewing auto owners: $2 to $5 hour, extra. New patented accessory. Capital unnecessary. Manager, 319 Quincy Bldg., Denver, Colorado.

Formulas, Trade Secrets—Different, dependable. Catalog free. D. Thaxly Co., Washington, D. C.

Agents—Best seller; Jem Rubber Repair for tires and tubes; supersedes vulcanization at a saving of over 800 per cent; put it on cold. It vulcanizes itself in two minutes, and is guaranteed to last the life of the tire or tube; sells to every auto owner and accessory dealer. For particulars how to make big money and free sample, address Amazon Rubber Co., Dept. 601, Philadelphia, Pa.

Agents—$4.25 Profit on every sale of Nibco Service Set. Needed in every home and building. Get particulars quick. A. F. Silver-Chamberlin Company, Clayton, N. J.

Big money and fast sales. Every owner buys gold initials for his auto. You charge $1.50; make $1.35. Ten orders daily easy. Write for particulars and free samples. American Monogram Co., Dept. 71, East Orange, N. J.

Insyde Tires in your old casings give from 3 to 5 thousand miles more service. Positively prevent punctures and blowouts. Used over and over again. Low priced. Big money saver. Agents wanted. Write for terms. American Accessories Co., B 784, Cincinnati, Ohio.

Agents—90c an hour to advertise and distribute samples to consumer. Write quick for territory and particulars. American Products Co., 9719 American Bldg., Cincinnati, Ohio.

Make $25 to $50 week representing Clows' Famous Philadelphia Hosiery, direct from mill—for men, women, children. Every pair guaranteed. Prices that win. Free book "How to Start" tells the story. George Clows Company, Desk 27, Philadelphia, Pa.

Success in Business and Personal Affairs! Read character by handwriting and features. Conlin System. Low price for entire course. Write. H. E. Conlin, Dept. G, 21 St. John's Place, Buffalo, N. Y.

Men's Shirts. Easy to sell. Big demand everywhere. Make $15.00 daily. Undersell stores. Complete line. Exclusive patterns. Free samples. Chicago Shirt Manufacturers, Franklin & VanBuren, Factory, 115, Chicago.

Wonderful Invention—Eliminates all needles for phonographs. Saves time and annoyance. Preserves records. Lasts for years. 12,000,000 prospects. $15.00 daily. Free sample to workers. Everplay, Desk 97, McClurg Bldg., Chicago.

We want Salesmen and Agents, either whole or side line, to sell our low priced radio books to the trade. Excellent proposition for live wires. The E. I. Company, Publishers, 233 Fulton Street, New York City.

Greatest Sensation! Eleven Piece toilet article set selling like blazes at $1.75 with $1.00 dressmakers shears free to each customer. Spring rush on. Foster Reid Co., 28 Winslow Bldg., Station C, Chicago.

Sell Tailoring—the quickest selling, most profitable line in the selling field. Our one-price line shows more than 100 all-wool fabrics for tailored-to-measure suits and overcoats all at one amazing low price. Every order pays you good profit, cash in hand. Tailoring experience not necessary. We furnish handsomest selling outfit and most effective selling helps. Write at once. Goodwear Chicago, Inc., Dept. 545, Chicago.

Write and learn how to start profitable business without capital or experience. Silvering mirrors, refinishing **auto headlights,** tableware, plating. Outfit furnished. International Laboratories, Dept. 25, 309 Fifth Ave., New York.

Earn big money fast applying gold initials to autos. **Every** owner buys—$1.35 profit on $1.50 sale—particulars and samples free. Write quick. Lithogram Co., Dept. 19, East Orange, N. J.

Only one sale a day means $200 per month! Five sales, $1,000 per month! Marvelous new adding machine. Retails $15. Work equals $350 machine. Adds, subtracts, multiplies, divides automatically. Speedy, accurate, durable, handsome. Five-year guarantee. Offices, stores, factories, garages, buy one to dozen. A fortune for live agents. Write quick for protected territory and free trial offer Lightning Calculator Co., Dept W., Grand Rapids, Mich.

Big Fast Profits For Agents. Repeater Six Fuse Plugs sell on sight wherever there is electricity. Do away with lighting troubles. Welcomed everywhere. Get details. Sample 25c. Moss-Schury Manufacturing Company, Inc., 18 A Detroit, Mich.

Agents: Big Profits, no competition. Make $7.00 to $15.00 daily selling our beautiful Scripture Text Calenders. Agents now selling from 10,000 to 50,000 yearly. Write now. Messenger Publishing Co., Dept. 141, 311 West Superior St., Chicago, Ill.

$60—$200 a week. Genuine Gold Letters for store windows. Easily applied. [illegible] sides. Liberal offer to general agents. Metallic [illegible] B, North Clark, Chicago.

Agents Wanted—(Continued)

Sell Madison 'Better Made" Shirts direct from our factory to wearer. No capital or experience required. Easily sold. Big profits. Write for Free Samples. Madison Mills, 503 Broadway, New York.

Agents—$15 a day—Easy, quick Sales—Free Auto—Big weekly bonus — $1.50 premium Free to every customer. Simply show our Beautiful, 7-piece, Solid Aluminum Handle Cutlery Set. Appeals instantly. We deliver and collect. Pay daily. New Era Mfg Co., 803 Madison St., Dept. 88D, Chicago.

Agents—Big returns, fast office seller; particulars and samples free. One Dip Pen Co., 12 Daily Record Bldg., Baltimore, Md.

Rummage Sales make $50.00 daily. We start you. Representatives wanted everywhere. Wholesale Distributors, Dept. 32, 609 Division Street, Chicago.

$10 daily silvering mirrors, plating and refinishing lamps, reflectors, autos, beds, chandeliers by new method. Outfits furnished. Write Gunmetal Co., Ave. D, Decatur Ill.

Earn $10 daily silvering mirrors, plating and refinishing metalware, chandeliers, bedsteads, headlights. Outfits furnished. N. Decie Laboratories, 1133 Broadway, New York.

Agents—Our soap and toilet article plan is a wonder; get our free sample case offer. Ho-Ro-Co., 119 Locust, St. Louis.

American Made Toys

Manufacturers on large scale, also homeworkers, wanted to manufacture Metal Toys and Novelties. Millions needed of Barking Dogs, Wag-Tail Pups, Wild Animals, Automobiles, Indians, Cow-Boys, Baseball Players, Cannons, Toy Soldiers, Crowing Roosters, Statues of Liberty, Miniature castings of Capital, Bathing Girl Souvenirs and others. Unlimited possibilities. Guaranteed Casting forms furnished manufacturers at cost price from $5.00 up, with complete outfit. No experience or tools necessary. Thousands made complete per hour. We buy goods all year and pay high prices for finished goods. Cash on Delivery. Contract orders placed with manufacturers. Catalog and information free. Correspondence invited only if you mean business. Metal Cast Products Co., 1696 Boston Rd., New York.

Chemistry

"Popular Chemistry" magazine. "The Experimenter's monthly." Six month's trial, 45c. A. Wright Laboratory, Caldwell, New Jersey.

Learn Chemistry at Home. Dr. T. O'Conor Sloane, noted educator and scientific authority, will teach you. Our home study correspondence course fits you to take a position as chemist. See our ads on pages 489 and 511 of this issue. Chemical Institute of New York, 66 W. Broadway, New York City.

Your chemical problem solved and working process furnished for Five Dollars. Write me. W. Stedman Richards, Consulting Chemist, Box 2402, Boston, Mass.

Correspondence Courses

Used Correspondence courses and educational books bought and sold. Attractive prices. Educational Service, 1003 Park, Piqua, Ohio.

Dollars Saved. Used correspondence courses of all kinds sold, rented and exchanged. List free. (Courses bought.) Lee Mountain, Pisgah, Alabama.

Duplicating Devices

"Modern" Duplicators save Time, Labor and Money. Gets Business. Reproduces Typewritten or penned letters, Drawings, Lessons, Music, Menus, Bids, Notices, Specifications, Maps or anything in one or more colors. Prints two per minute. Special Sale On. 30 Days' Free Trial. $2.25 up. Booklet Free. B. J. Durkin-Reeves Co., Pittsburgh, Pa.

Photo Developing

Special Trial Offer. Any size Kodak film developed for 5c prints 3c each. Overnight service. Get a free Auto. Ask for details. Roanoke Photo Finishing Co., 255 Bell Ave., Roanoke, Va.

Photoplays, Stories, Etc.

Wanted. Men and women ambitious to make money writing Stories and Photoplays. Send for wonderful Free Book that tells how. Authors' Press, Dept. 131, Auburn, N. Y.

Books

Free—Upon request will send you my literature illustrating the following books. Astrology, Character, Clairvoyance, Concentration, Healing, Hypnotism, Magnetism, Mediumship, Personal Magnetism, Personality, Physiognomy, Salesmanship, Seership, Success, Sex, Will, Yogi Philosophy, Gazing Crystals, etc. A. W. Martens, E.E. 6, Burlington, Iowa.

"Lights, Colors, Tones and Nature's Finer Forces," Including Vibrations; Adic-Auras; Electro-Magnetons, Cololights; Radio; Coming Inventions, 270 pages. Satisfaction Guaranteed; $2.00, Circulars Free. Stevens Research Laboratories, 242 Powell Street, San Francisco, Calif.

Perpetual Motion, by Percy Verance. A history of the efforts to discover same from earliest days to the present, together with a scientific discussion regarding the possibility of its ultimate achievement. Profusely illustrated, 357 pages. Price postpaid, $2.00. The Enlightenment Specialty Co., 305 Fourth St., Edwardsville, Ill.

Diseases and Their Innate Healer. Book 25 cents Arthur Stevens, Wauseon, Ohio.

Send for New Illustrated Catalog of Books on Mechanical Subjects Free. Spon & Chamberlain, 122 S Liberty Street, New York.

Hypnotism—Controls self and others. Wants gratified. Ten easy methods, $1.10. "Mindreading" (any distance) Wonderful, $1.10. Science Institute, SE1014 Belmont, Chicago.

Experimental Electricity Course in 20 Lessons. By S. Gernsback and H. W. Secor, E.E. A course of the theory and practice of Electricity for the Experimenter. Every phase of experimental electricity is treated comprehensively in plain English. New experiments are described and explained and nearly every application of Electricity in modern life is given. 160 pages—400 illustrations. Flexible cloth cover, 75c. postpaid. Stiff cloth cover, $1.25, postpaid. Experimenter Publishing Co., Book Dept., 53 Park Place, New York City.

How to Make Wireless Sending Apparatus. 100 pages—88 illustrations. Written and published entirely for the wireless enthusiast who wants to make his own radio apparatus. Contains more information on "how to make it" than any other book we know of. Paper bound, 35c postpaid. Experimenter Publishing Co., Book Dept., 53 Park Place, New York City.

How to Make Radio Frequency Amplifiers. This book is for the more advanced amateur, showing the construction of the Radio Frequency Amplifying Transformer and giving complete constructional data. It shows the application of Radio Frequency to amplifying units that the amateur may already possess and gives 15 hook-ups showing practically every use Radio Frequency Amplifying Transformers can be put to. 32 pages, 15 illustrations; bound in beautiful two-color cover. Prepaid 25c. The E. I. Company, 233 Fulton St., New York City.

Major Armstrong's New Epoch-Making Invention Will Solve Your Loop Antenna Problem. The New Armstrong Super-Regenerative Circuit is a means now that is made possible with two vacuum tubes and an indoor loop antenna to receive broadcasting music up to 100 miles distant. Our engineering department has compiled a pamphlet that gives an exposition of the theory of operation with full working directions, etc. A large blue-print is included with the pamphlet. Your dealer cannot supply you with these pamphlets. Send us 25c and we will mail you this wonderful exposition prepaid. Tell your dealer to ask us for our proposition. The E. I. Company, 233 Fulton St., New York City.

Wireless Course in 20 Lessons. By S. Gernsback, A. Lescarboura and H. W. Secor, E.E. Tells you everything you want to know about "Wireless"—theory, practice and history. A clear, concise course on every phase of this subject. 160 pages—350 illustrations, 30 tables. Stiff cloth cover, $1.75 postpaid. Experimenter Publishing Co., Book Dept., 53 Park Place, New York.

How to Make Wireless Receiving Apparatus. 100 pages—90 illustrations. Only strictly modern radio apparatus are described in this book and the illustrations and descriptions are so clear and simple that no trouble will be experienced in making the instruments. Paper covered, 35c postpaid. Experimenter Publishing Co., Book Dept., 53 Park Place, New York City.

Science and Invention Bound Volume No. 9, May 1921-April 1922; contains 1200 pages with over 1500 illustrations and over 700 articles by the foremost American and Foreign writers. We have also a limited amount of the following Bound Volumes of Science and Invention (Electrical Experimenter) Vol. No. 6—May 1918 to April 1919; Vol. No. 7—May 1919 to April 1920; Vol. No. 8—May 1920 to April 1921. Each volume bound in stiff board covered with green vellum and gold stamped. Price for Volume No 9—$2.25. Price for volume No. 6, 7 or 8—$2.00. All four volumes $7.00, sent express collect. Experimenter Publishing Co., 53 Park Place, New York City.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

Business Opportunities

Stop Plodding! Be Successful. Operate a Tire Repair Shop. Make big profits in any locality. We teach you and furnish complete equipments $100 up. Book of Opportunity free. Haywood's 1312 South Oakley Avenue, Chicago.

Make money with your camera. P. Lancaster, Box 967, Los Angeles.

Dollars yearly in your spare time. Indoors or outdoors I'll show you how. Particulars free. S. I. Metz, 313 East 89th, New York.

Will pay cash for sole right to novelty idea or invention that retails for 10 cents. Address Lock Box 66, Station F, New York City.

Join National Institute Inventors, 8 E. 14th St., New York City, strong protective membership society. Will secure, develop, manufacture, market patents. Dues, $10. Booklet free.

Sell us your spare time. You can earn Fifteen to Fifty dollars weekly writing show cards at home. No canvassing; pleasant profitable profession, easily, quickly learned by our simple, graphic block system, artistic ability unnecessary; we instruct you and supply work. Wilson Methods, Limited, Dept. J, Toronto, Canada.

You can have a business-profession of your own and earn big income in service fees. A new system of foot correction: readily learned by anyone at home in a few weeks. Easy terms for training, openings everywhere with all the trade you can attend to. No capital required or goods to buy, no agency or soliciting. Address Stephenson Laboratory, 18 Back Bay, Boston, Mass.

Make Money at Home. Part or spare time, casting metal toys. Particulars free. New Specialty Co., 448, E. 79th St., New York.

Exchange

Sacrifice: Electrical, telephone and photographic goods, tools, magic set, coins, stamps, encyclopedia applied Electricity. Hawkins Guides, magazines. B. Howorth, Normal, Memphis, Tenn.

Ford Owners

Sport Cars. Fast, saucy, hug the turns and stick to the road—make you glad you're a Ford owner. Can easily be built by aid of life size "Red-i-Kut" patterns and picture instructions. The "Pal" system delivered complete with pressed metal streamline tail for $6.40. Garage men make big money building them. Send for prospectus on making sport cars—Jiffy Tops and Gosum windshields. Kuempel Co., 1100 Kuempel Bldg., Guttenberg, Iowa.

For Inventors

Get your own patents. Application blanks, complete instructions $1. Cutting Bros., Campbell, Calif.

Before or after filing your application for patent, it will pay you to read over my "Inventors Advisor No. 4." Free for asking. Write: M. Labiner, Registered Patent Attorney, 3 Park Row, New York.

Your Chemical problem solved and working process furnished for Five Dollars. Write me. W. Stedman Richards, Consulting Chemist, Box 2402, Boston, Mass.

Patents Marketed. 10 per cent commission; send description, 45 Guerrero St., San Francisco, Cal.

Inventor's Educator. 900 Mechanical Movements. 50 Perpetual Motions. How to procure and sell patents. Mechanical Movements greatly assist Inventors, suggest new ideas. Explains how to select an attorney and avoid Patent Sharks. Price $1.50. Postage free. Fred G. Dietrich, Co., 601 Ouray Building, Washington, D. C.

Formulas

Moneymaking Books, Plans, Formulas. Catalog Free. Ideal Book Shop, 5501-E, North Robey, Chicago.

Formulas—All kinds—Household receipts, beverages, chemical magic, instructive, amusing. Tests made and taught by mail. Eighteen years' experience. Universal Laboratories, Newark, Delaware.

For the Photographer

Have You a Camera? Write for free sample of our big magazine, showing how to make better pictures and earn money. American Photography, 465 Camera House, Boston 17, Mass.

Kodak + Hospital, Camera Exchange. Used cameras sold, bought, exchanged. Expert and Reliable Camera Repairing a Specialty. Send your broken Camera. Will write you cost. Reasonable. Turner, 1679 Ave. A., N. Y.

Games and Entertainment

Tricks, Puzzles, Jokes, Magical Apparatus, Plays. Stage Supplies, Mind-Reading, Acts and Sensational Escapes. Send 10c for 160-page illustrated 1922 professional catalogue. Oaks Magical Co., Dept. 519, Oshkosh, Wis.

Greatest mind reading act ever sold. Not a toy. Easily mastered. Cannot be detected. Postpaid for $1.00. The Benwills Co., Box 797, Macon, Ga.

Instruction

Used correspondence courses bought and sold. Bargain catalogue 1000 courses free. Students' Exchange, Dept. 4, 47 West 42d St., New York.

Learn Chemistry at Home. Dr. T. O'Conor Sloane, noted educator and scientific authority, will teach you. Our home study correspondence course fits you to take a position as chemist. See our ads on pages 489 and 511 of this issue. Chemical Institute of New York, 66 W. Broadway, New York City.

Languages

World-Romic System, Masterkey to All Languages. Primers, 23 languages, $1.94 each language: English, French, German, Italian, Portuguese, Spanish. Pronunciation—Tables. 102 languages, 30c each language. Languages Publishing Company, 8 West 40th Street, New York.

Health

Enjoy Health Through Right Eating. Literature free. The Apyrtropher, 1910 No. Harding Ave., Chicago, Ill.

Free to Men—Information of a scientific nature that has brought physical vigor and happiness to thousands. No charge; no obligation. Enclose stamp for reply. C. I. Wood & Co., Colorado Springs, Colorado.

Help Wanted

We want Salesmen and Agents, either whole or side line to sell our low priced radio books to the trade. Excellent proposition for live wires. The E. I. Company, Publishers, 233 Fulton Street, New York City.

Detectives Earn Big Money. Travel. Excellent opportunity. Great demand everywhere. Experience unnecessary. Particulars free. Write, American Detective System, 1968 Broadway, N. Y.

Be a Mirror Expert. $3 to $10 a day; spare time home at first; no capital; we train, start you making and silvering mirrors French method. Free prospectus. W. R. Derr, Pres., 26 McKinley St., Baldwin, N. Y.

Vacancies Constantly. U. S. Government positions. $95—$250 month. Men—Women, 18 up. Steady. Vacations. List positions free. Write today sure. Franklin Institute, Dept. A-24, Rochester, N. Y.

Be a Detective: Excellent opportunity; good pay; travel. Write C. T. Ludwig, 1417 Westover Bldg., Kansas City, Mo.

Make Money in spare time mailing letters. Rare opportunity now. Men, send addressed envelope for special plan. Normande R, 147 W. 23d St., New York.

Earn $110 to $250 monthly, expenses paid, as Railway Traffic Inspector. Position guaranteed after 3 months' spare time study or money refunded. Excellent opportunities. Write for Free Booklet G-57, Stand. Business Training Inst., Buffalo, N. Y.

All men, women, boys, girls, 17 to 60, willing to accept Government positions, $117-$190, traveling or stationary, write Mr. Ozment, 293, St. Louis, Mo., immediately.

Silvering Mirrors, French plate. Easily learned, immense profits. Plans free. Wear Mirror Works, Excelsior Springs, Mo.

Earn $25 Weekly, spare time, writing for newspapers, magazines. Experience unnecessary; details free. Press Syndicate, 566-5 St. Louis, Mo.

$100 to $300 a Week. Men with slight knowledge of motors who can reach car owners can earn $300 weekly without making a single sale. If they can also make sales their profits may reach $25,000 yearly. Only proposition of its kind ever offered. V. P. Phillips, 1908 Broadway, New York.

Improved Made Toys

We show you how to earn big money easily with our casting forms making Whistling Birds, Wild Animals, Crowing Roosters, Automobiles, Baseball Players, Statue of Liberty, Indians, Toy Soldiers, Cowboys, Barking Dogs, Wag Tail Pups, Miniature castings of Capitol, Bathing Girl Souvenirs and others. No experience necessary. We furnish you with molds and necessary outfit from $3.50 up. We buy large quantities of finished goods at highest prices. Spot cash. Send for catalogue and information free. The Improved Metal Casting Co., 342 East 145th St., New York.

Machinery and Tools

Concrete Building Block Machines and Molds. Catalogue free. Concrete Machine Co., 305 South Third St., St. Louis, Mo.

Mail Order Business

$50 week evenings—I made it. Mail Order business; booklet for stamp tells how. Sample and plan, 25c. Free 12 articles worth $3. A1 Exp. Scott, Cohoes, N. Y.

Miscellaneous

Questions Answered. $1.00 each, any subject. If answer impossible, money returned. Dept. 2, 31 N. E. 14th Street, Miami, Florida.

Real Airplane Propellers. New 8 ft. Beautiful finish, bright copper tips, decorate your den, $5.00 ea. Crated from Middletown, Penna. Air Transport Co., L. I. City, N. Y.

Buy your cigars direct, 50 Aromor prepaid, $1.50. Money back if dissatisfied. Agents wanted. Havana Smokehouse, Homeland, Ga.

Electro plating Generators. Make money doing plating work. Priced reasonable. Terms if desired. Write Clarence Hobart, Troy, Ohio.

Don't Incorporate. Organize any enterprise under common law; any capital; transact business any state; no corporation taxes; no personal liability; raise capital; Booklet free. Herbert Company, 9 Rand McNally Building, Chicago.

Springs, made to order. Wright Bros. Spring & Wire Works, 5616 Huron St., Chicago.

Pecan-Orange Groves. Easy Terms. Dept. I, Suburban Orchards Co., Oceansprings, Miss.

Special Financial Service. Obtain capital. Any Amount. Banking connections in United States and Europe. Incorporate your business. Sell Stock. Keep control. Transact any business, anywhere. Avoid personal liability. Low cost for Expert Services, all corporation supplies, engraved stock certificates, etc. Lists of Investors, Here and Abroad. Write for full information. Advice Free. Registrar and Trustee Co., Rochester, N. Y.

Motion Picture Business

$35 Profit Nightly. Small capital starts you. No experience needed. Our machines are used and endorsed by Government institutions. Catalog free. Atlas Moving Picture Co., 470 Morton Bldg., Chicago, Ill.

Patent Attorneys

Patent applications filed on partial payment plan. Trade-marks; copyrights, Milo B. Stevens & Co., 892 F St., N. W., Washington, D. C.

Inventors—Send for form "Evidence of Conception" to be signed and witnessed. Form, fee schedule, information free. Lancaster and Allwine, 242 Ouray Bldg., Washington, D. C.

Millions spent annually for ideas! Hundreds now wanted! Patent yours and profit! Write today for free books—tell how to protect yourself, how to invent, ideas wanted, how we help you sell, etc. 212 Kresge Bldg., American Industries, Inc., Washington, D. C.

Patents. Send for free booklet. Highest references, Best results. Promptness assured. Send model or drawing for examination and opinion. Watson E. Coleman, Patent Attorney, 624 F Street, Washington, D. C.

Inventors write me about patents. My fees payable monthly. Booklet free. Frank Fuller, Washington, D. C.

Patents Secured. Prompt service. Avoid dangerous delays. Send for our "Record of Invention" form and Free Book telling How to obtain a Patent. Send sketch or model for examination. Preliminary advice without charge. Highest References. Write Today. **Jacobi & Jacobi,** 418 Ouray Bldg., Washington, D. C.

Herbert Jenner, Patent Attorney and Mechanical Expert, 624 F Street, Washington, D. C. I report if patent obtainable and exact cost. Send for circular.

Lacey Patent-Sense. "The book the inventor keeps." Free. See page 503.

Patents Procured, Trade Marks Registered. A comprehensive, experienced, prompt service for the protection and development of your ideas. Preliminary advice gladly furnished without charge. Booklet of information and form for disclosing idea free on request. Richard B. Owen, 130 Owen Bldg., Washington, D. C., or 2278-T Woolworth Bldg., New York.

Inventors! Record invention legally before disclosing to others. Our Invention Record and Data Sheet shows how. Sent free and valuable information given on patent procedure, costs, etc. Report on patentability includes copies of patents nearest your idea. O'Connell & O'Connell, 400 Jenifer Building, Washington, D. C.

Monroe Miller, Ouray Building, Washington, D. C.; patent attorney, mechanical and electrical expert. Best quality of work and results. Moderate charges.

Patents—Prompt, personal, efficient service by an attorney-at-law skilled in all branches of Patent Practice. Over 18 years' actual experience; full information upon request. B. P. Fishburne, 330 McGill Bldg., Washington, D. C.

Inventors. Send sketch or model of invention for opinion concerning patentable nature and exact cost of patent. Book, "How to Obtain a Patent," sent free. Tells what every inventor should know. Established twenty-eight years. Highest references, prompt service, reasonable charges. Chandlee & Chandlee, 441 Seventh Ave., N. W., Washington, D. C.

"Inventors' Guide" free on request; gives valuable information and advice for all who have original ideas or improvements. Frank Ledermann, Registered Attorney and Engineer, 15-E Park Row, New York.

Edward C. Sasnett, formerly a Principal Examiner U. S. Patent Office, Personal Service, 531 McGill Bldg., Washington, D. C.

H. F. Lowenstein, Registered Patent Attorney, Radio Expert, 825 McLachlen Building, Washington, D. C.

Patents

Unpatented ideas can be sold. I tell you how and help you make the sale. Particulars free. Write W. B. Greene, Jenifer Building, Washington, D. C.

Inventions Commercialized. Patented or unpatented. Write Adam Fisher Mfg. Co., 205 St. Louis, Mo.

Patents For Sale

Investigate No. 1,460,821 just issued. Revolutionizes its kind. For sale reasonable to first party. T. J. Morris, 507 N. 11th St., Richmond, Va.

Brush's Pad for cleaning and spotting any garments, etc. No. 1,224,581 for $16,000.00. C. B. Twyford, 617 Bailey, Zanesville, Ohio.

Personal

Exchange interesting letters with new friends. Write Dolly K. Gray, Box 186, Denver, Colorado.

Exchange Cheery Letters with New Friends. Write Betty Lee, Inc., 4254 Broadway, New York City. Stamp appreciated.

Exchange jolly letters with new friends. Lots fun! Send stamp. Era Moore, Box 908, Jacksonville, Fla.

Exchange letters with new friends everywhere. Pleasant pastime, particulars free. Smith, Box 1167Y, Denver, Colo.

Lonely Hearts, join our Club, be happy; correspondence everywhere; many wealthy, descriptions, photos free. Standard Club, Box 609, Grays Lake, Ill.

All famous "Beauty Parlor" secrets for 50c. J. Mello, 376 Central St., Lowell, Mass.

Your Horoscope. Business, Changes, Social, Matrimonial prospects. Send birthdate and 10 cents (stamps) for remarkable test reading. Zanya, G-202, West 105th St., New York.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

SENSATIONAL SALE

TYPEWRITERS with a 5 Year Guarantee FREE TRIAL Before You Buy

This is the famous L. C. Smith typewriter which has set the world's standard for quality and service for over twenty years. It has every late style feature and modern operating convenience. Comes to you with everything complete; tools, cover, operating book and instructions—nothing extra to buy. You cannot imagine the perfection of this beautiful rebuilt typewriter until you have seen it. We do the most perfect rebuilding known to the industry. We have sold thousands of these perfect late style machines at this bargain price and every one of these thousands of satisfied customers had this beautiful, strictly up-to-date machine on five days' free trial before deciding to buy it. These typewriters will write as clean cut and as perfect a letter as quickly and easily as any typewriter you can buy at any price. We send it to you F. O. B. Chicago for five days' free trial. It will sell itself, but if you are not satisfied that this is the greatest typewriter you ever saw, you can return it at our expense. You won't want to return it after you try it, for you cannot equal this wonderful value anywhere.

Send TODAY For Details

The supply on this offer is limited, the price will probably be raised when next advertisement appears, so don't delay. Fill in the coupon today. There is no red tape to our free trial and easy payment plan. We employ no salesmen. It is the greatest typewriter opportunity you will ever have. Don't send us a cent. Get the coupon in the mails today—here.

Smith Typewriter Sales Co., 303-360 E. Grand Ave., Chicago
Send me without obligation your FREE book of valuable typewriter information and sensational Special Sale Bulletin.

Name.....

Street Address.....

City.....*State*.....

PIMPLY SKIN made WELL

When a few applications of this wonder working lotion has cleared faces of ***pimples, blackheads, acne eruptions*** on the face or body, ***enlarged pores, oily or shiny skin,*** you can realize why CLEAR-TONE has been tested and approved in over **100,000 Test Cases.**

The simplicity of the treatment, *The Story of How I Cured Myself* are all explained in my free booklet. Write for your copy today and learn of the results gotten by thousands of men and women.

E. S. GIVENS
168 CHEMICAL BLDG. KANSAS CITY, MO.

SEX

Facts other sex books don't dare discuss are plainly told in **"Where Knowledge Means Happiness."** Creates a new kind of married love. One reader says: *It contains more real information than all other sex books put together.*

From "Where Knowledge Means Happiness"

Sent in plain cover, *by return mail,* for $1.00, cash, money order, check or stamps

Copyright 1921
Dept. 39 COUNSEL SERVICE, 257 W. 71st St. N.Y.

$1.00

SEXUAL KNOWLEDGE

320 Pages ILLUSTRATED Cloth
By Winfield Scott Hall, M.D., Ph.D.

SEX FACTS MADE PLAIN

What every young man and
Every young woman should know
What every young husband and
Every young wife should know
What every parent should know

Table contents and commendations on request

Postpaid. Mailed in plain wrapper.
AMERICAN PUB. CO., 945 Winston Bldg., Philadelphia

ARE YOU SELF-CONSCIOUS?

Embarrassed in company, lacking in self-control? Let me tell you how you can overcome these troubles.
VERITAS, Desk 15, 1400 Broadway, New York City

OLD FIELD NATURES Own Cured
TOBACCO gives more enjoyment. No bite
Direct from Grower. Sample 10cents
Mailing Co. Paducah, Ky

Motorcycles—Bicycles

Don't buy a Bicycle Motor Attachment until you get our catalogue and prices. Shaw Mfg. Co., Dept. 6, Galesburg, Kansas.

Office Devices

Save half on office Machines, Equipment, Addressers, Multigraphs, Duplicators, Dictaphones. Pruitt Company, 172 North Wells, Chicago.

Phonographic Supplies

Build Your Phonograph. Quality phonoparts. Famous Serenado Motors. Also original Perfection Motors. Electric Motors, tonearms, reproducers, amplifiers, case material, accessories. Free blueprints and building instructions. Big Saving. Wonderful results. Prompt delivery. Catalog mailed for ten cents. Hoosier Mfg. & Supply Company, 321 Baldwin Block, Indianapolis, Indiana.

Printing

150 each Letterheads; Envelopes, $1.50. Jacobus Service, Irvington, New Jersey.

Lowest prices all kinds printing. Long Run Specialties, Journal Printing Co., Tallapoosa, Ga.

Salesmen Wanted

$742 Last Month for Beck of Buffalo introducing latest advertising plan; nothing else like it; every merchant wants it; easy sales; no deliveries; no collections; specialty salesmen write quick for offer. National Adv. Service, P.O. Box 43, La Grange, Ind.

Short Stories, Manuscripts Wanted

Earn $25 Weekly Spare Time writing for newspapers, magazines. Experience unnecessary; details free. Press Syndicate, 566 St. Louis, Mo.

Short Stories, poems, plays, etc., are wanted for publication. Literary Bureau, 165 Hannibal, Mo.

Song Poems Wanted

Write the Words for a Song. We compose music. Our Chief of Staff wrote many big song-hits. Submit your song-poem to us at once. New York Melody Corp., 412 Romax Bldg., New York.

Prominent London Music Publisher is open for available songs by American Writers, Amateur or Professional; songs judged on merit—not Writers' reputations. For further particulars, write to American representative, Jack Mahoney, Dept. I. 145 West 45th St., New York.

Stamping Names

Make $19 a Hundred stamping names on keychecks. Send 25c for sample and particulars. Ex Kaytag Co., Cohoes, N. Y.

Stamps and Coins

Stamps—20 Unused. All different. Free. Postage 3c. Mention paper. Quaker Stamp Co., Toledo, Ohio.

California Gold, quarter size, 27c; half-dollar size, 53c. Columbian nickel and catalogue, 10c. Norman Schulz, Box 146. Colorado Springs, Colo.

Typewriters

Typewriters sold on payments. Free trial. Payne Company, Rosedale, Kansas.

Ventriloquism

Ventriloquism taught almost anyone at home. Small cost. Send 2c stamp today for particulars and proof. Geo. W. Smith, Room M-747, 125 N. Jefferson Ave., Peoria, Ill.

Wireless

Attention! 50 Vacuum Tube Hook-Ups. The greatest collection of Vacuum Tube Circuits ever brought under two covers at such insignificant cost. These diagrams will be found in the great "Rasco" catalogue which contains raw materials and parts in a greater profusion than any other catalogue. 15c in stamps or coin will bring the catalogue to you. Radio Specialty Company, 100 Park Place, New York City.

Boys, don't overlook this! The "Rasco" Baby Detector. Greatest detector ever brought out with molded base. Fully adjustable. See former advertisements in this publication or our catalogue. Detector with Galena Crystal complete, 50c; the same Detector with Radiocite Crystal, 75c, prepaid. Send for yours today. Radio Specialty Co., 100 Park Place, New York City.

Radio Generators—500 Volt 100 Watt $23.50. High Speed Motors—Federal Phones $5.50—Battery Chargers $12.50. Motor Specialties Co., Crafton, Pittsburgh, Penna.

Motors—G.E. ¼ HP., $16.50—½ HP., $29.50—5 HP., $98.50. Generators—8 Volt 10 Amp. $15.00—32 Volt 500 Watt $29.50. Write for Catalog. Motor Specialties Co., Crafton, Pittsburgh, Penna.

How to Make Wireless Sending Apparatus. 100 pages—88 illustrations. Written and published entirely for the wireless enthusiast who wants to make his own radio apparatus. Contains more information on "how to make it" than any other book we know of. Paper bound, 35c postpaid. Experimenter Publishing Co., Book Dept., 53 Park Place, New York City.

Wireless—(Continued)

Experimental Electricity Course in 20 Lessons. By S. Gernsback and H. W. Secor, E.E. A course of the theory and practice of Electricity for the Experimenter. Every phase of experimental electricity is treated comprehensively in plain English. New experiments are described and explained and nearly every application of Electricity in modern life is given. 160 pages—400 illustrations. Flexible cloth cover, 75c. postpaid. Stiff cloth cover, $1.25 postpaid. Experimenter Publishing Co., Book Dept., 53 Park Place, New York City.

Wireless Course in 20 Lessons. By S. Gernsback, A. Lescarboura and H. W. Secor, E.E. Tells you everything you want to know about "Wireless"—theory, practice and history. A clear, concise, course on every phase of this subject. 160 pages—350 illustrations, 30 tables. Stiff cloth cover, $1.75, postpaid. Experimenter Publishing Co., Book Dept., 53 Park Place, New York City.

How to Make Wireless Receiving Apparatus. 100 pages—90 illustrations. Only strictly modern radio apparatus are described in this book and the illustrations and descriptions are so clear and simple that no trouble will be experienced in making the instruments. Paper covered. 35c postpaid. Experimenter Publishing Co., Book Dept., 53 Park Place, New York City.

How to Make Wireless Sending Apparatus. 100 pages—88 illustrations. Written and published entirely for the wireless enthusiast who wants to make his own radio apparatus. Contains more information on "how to make it" than any other book we know of. Paper bound, 35c, postpaid. Experimenter Publishing Co., Book Dept., 53 Park Place, New York City.

The How and Why of Radio Apparatus, by H. W. Secor, E. E. This newest book on radio matters fulfills a distinct gap in wireless literature in that, while the treatment is made as understandable and as free from mathematics as possible, it at the same time incorporates a wealth of technique and instruction for the Radio Amateur—the Radio Operator—the Installation and Designing Expert—as well as teachers and students of the subject in general. A very broad field has been covered by the author, at the same time giving a great deal of information not found in other text books. If you are engaged in any branch of the Radio or allied arts at all you will surely need this latest contribution to radio literature, which is destined to be found on every radio man's book shelf before long. A glance at the following list of chapters gives but a very scant idea of the extensive and useful radio knowledge provided in its text The Induction Coil; The Alternating Current Transformer; Radio Transmitting Condensers; The Spark Gaps; Radio-Transmitting Inductances; Radio Receiving Tuners; Radio Receiving Condensers; Detectors; Telephone Receivers; Radio Amplifiers; Construction of a Direct Reading Wavemeter and Measurement of Inductances; Appendix containing very useful tables, covering all subjects treated in this very unusual book. This newest of Radio Works, cloth bound in Vellum de Luxe, Gold Stamped and Hand Sewed, has 160 pages. Size of book 6x9 inches. The How and Why of Radio Apparatus. Postpaid, $1.75. Experimenter Publishing Co., Book Dept., 53 Park Place, New York City.

Experimental Electricity Course in 20 Lessons. By S. Gernsback and H. W. Secor, E.E. A course of the theory and practice of Electricity for the Experimenter. Every phase of experimental electricity is treated comprehensively in plain English. New experiments are described and explained and nearly every application of Electricity in modern life is given. 160 pages—400 illustrations. Flexible cloth cover, 75c. postpaid. Stiff cloth cover, $1.25 postpaid. Experimenter Publishing Co., Book Dept., 53 Park Place, New York City.

Wireless Course in 20 Lessons. By S. Gernsback, A. Lescarboura and H. W. Secor, E.E. Tells you everything you want to know about "Wireless"—theory, practice and history. A clear, concise, course on every phase of this subject. 160 pages—350 illustrations, 30 tables. Stiff cloth cover, $1.75, postpaid. Experimenter Publishing Co., Book Dept., 53 Park Place, New York City.

How to Make Wireless Receiving Apparatus. 100 pages—90 illustrations. Only strictly modern radio apparatus are described in this book and the illustrations and descriptions are so clear and simple that no trouble will be experienced in making the instruments. Paper covered, 35c, postpaid. Experimenter Publishing Co., Book Dept., 53 Park Place, New York City.

Wireless Course in 20 Lessons. By S. Gernsback, A. Lescarboura and H. W. Secor, E.E. Tells you everything you want to know about "Wireless"—theory, practice and history. A clear, concise course on every phase of this subject. 160 pages—350 illustrations, 30 tables. Stiff cloth cover, $1.75, postpaid. Experimenter Publishing Co., Book Dept., 53 Park Place, New York.

How to Make Wireless Sending Apparatus.—100 pages—88 illustrations. Written and published entirely for the wireless enthusiast who wants to make his own radio apparatus. Contains more information on "how to make it" than any other book we know of. Paper bound, 35c, postpaid. Experimenter Publishing Co., Book Dept., 53 Park Place, New York City.

How to Make Radio Frequency Amplifiers. This book is for the more advanced amateur, showing the construction of the Radio Frequency Amplifying Transformer and giving complete constructional data. It shows the application of Radio Frequency to amplifying units that the amateur may already possess and gives 15 hook-ups showing practically every use Radio Frequency Amplifying Transformers can be put to. 32 pages, 15 illustrations; bound in beautiful two-color cover. Prepaid 25c. The E. I. Company, 233 Fulton St., New York City.

Major Armstrong's New Epoch-Making Invention Will Solve Your Loop Antenna Problem. The New Armstrong Super-Regenerative Circuit is a means now that is made possible with two vacuum tubes and an indoor loop antenna to receive broadcasting music up to 100 miles distant. Our engineering department has compiled a pamphlet that gives an exposition of the theory of operation with full working directions, etc. A large blue-print is included with this pamphlet. Your dealer cannot supply you with these pamphlets. Send us 25c and we will mail you this wonderful exposition prepaid. Tell your dealer to ask us for our proposition. The E. I. Company, 233 Fulton St., New York City.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

CIRCULATION 60,000 COPIES

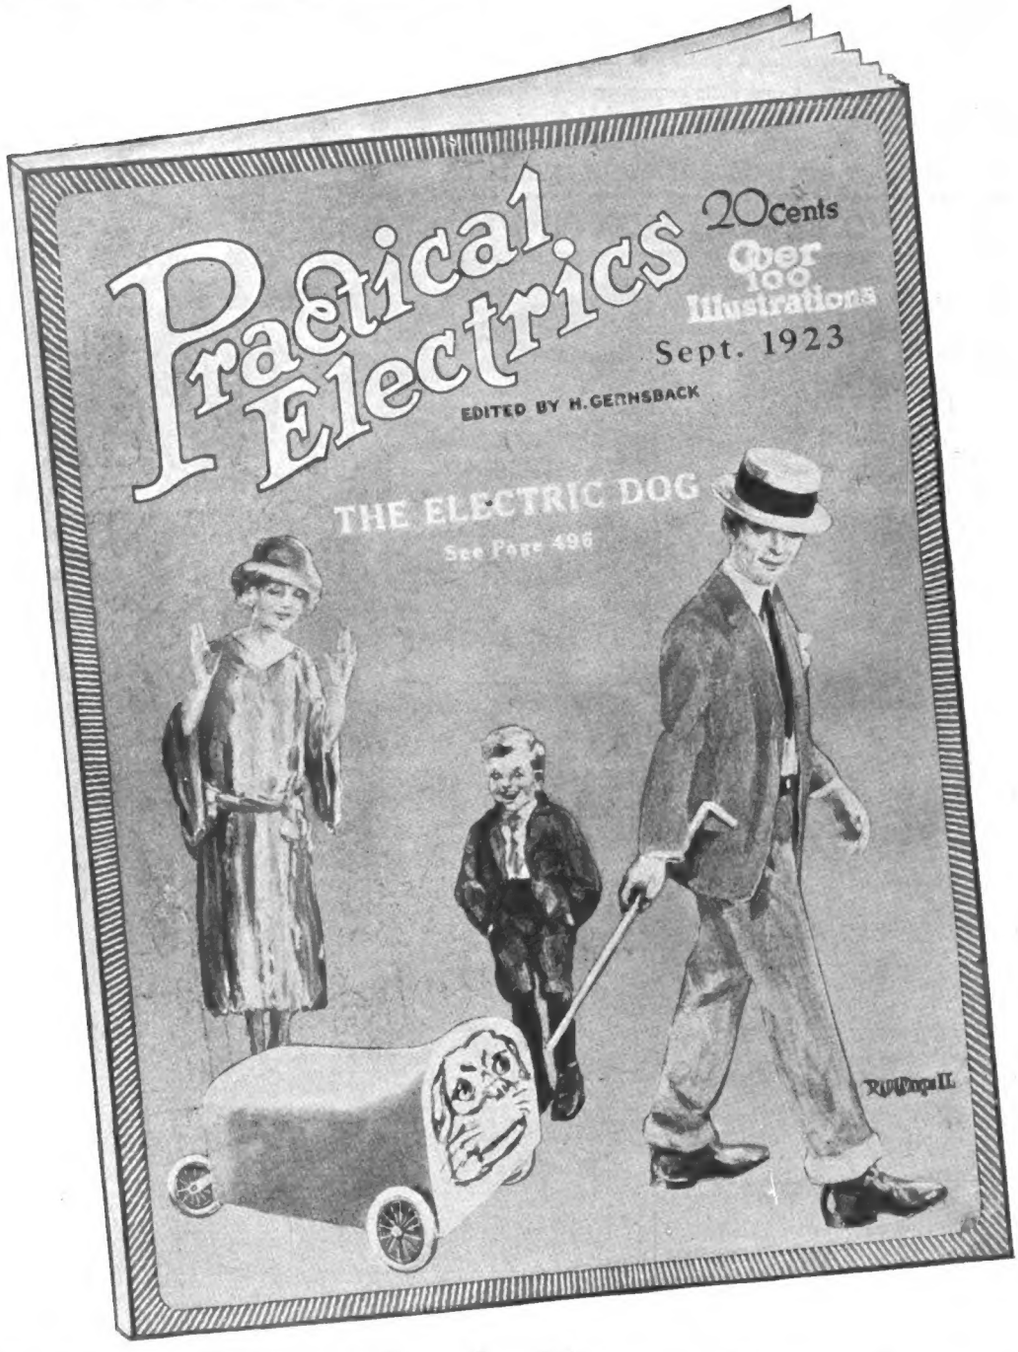

This magazine is edited by
H. GERNSBACK
also Editor of
RADIO NEWS
and
SCIENCE *and* INVENTION

100 Articles
Over
100 Illustrations

FOR SALE AT ALL NEWS STANDS

20c. the Copy
$2.00 a Year
Canada and Foreign
$2.50 a Year

SEND FOR
FREE
SAMPLE COPY
TODAY

See Coupon Below for SPECIAL OFFER

"The Electrical Magazine for Everybody"

PRACTICAL ELECTRICS is probably the most novel magazine of its kind ever conceived. It is personally edited by H. Gernsback, editor of SCIENCE & INVENTION and RADIO NEWS. Mr. Gernsback, who founded the old "Modern Electrics" as well as the "Electrical Experimenter," knows thoroughly what his readers want and have wanted for many years. PRACTICAL ELECTRICS, the 100% electrical magazine eclipses the best that was in "Modern Electrics" and "Electrical Experimenter."

Electricity covers such a tremendous field that the man who does not keep abreast with it does himself a great injustice. PRACTICAL ELECTRICS covers that field from every angle. It is written in plain every-day language that all can understand. It portrays the entire electrical development of the month faithfully in non-technical language. It caters to everyone interested in electricity, be he a layman, an experimenter, an electrician or an engineer—each will find in this magazine a department for himself and plenty more.

The September issue now on the news-stands contains 48 pages and over 100 different articles and over 100 illustrations, with an artistic cover in three colors. Professor T. O'Conor Sloane, Ph.D., is associate editor of the magazine.

INTERESTING ARTICLES IN SEPTEMBER "PRACTICAL ELECTRICS"

Magnet-tricks — The Electric Dog
Thermo-Couple Pyrometer, By Clyde J. Fitch
Electric Damper Regulator, By George G. McVicker
Toy Motors — Small Transformers
Repairman's Test Panel, By B. M. Blount
Sending Pictures by Wire (concluded from August issue) By Noel Deisch
Electrolytic Rectifiers
Storage Battery for Demonstrations.
Single Unit Million Volt Transformers, By D. F. Miner
Artificial Lightning Experiments — Gigantic Insulator

PRIZES

This magazine offers a number of prizes, as follows:

Our $50.00 Prize Contest for Junior Electricians and Electrical Experimenters includes as its elements simplicity, as great a degree of novelty as possible, and practicability.

An interesting $100 prize contest is announced, for best new uses for old spark plugs.

Also a new prize contest giving four prizes amounting to $37.50 for the best account of an odd electrical experience.

$3.00 for the best article on Elec-Tricks, the new department.

$3.00 for the best "short-circuit," the semi-humorous department.

In addition to this, the magazine pays high prices for all electrical experiments, electrical articles, etc.

See Current Issue for Full Details.

This issue also contains articles by some of the greatest electrical writers, workers and students. The magazine will prove a revelation to any one interested in electricity.

Every issue besides its many other features contains the following departments:

"New Things Electric"
"Experimental Electrics"
"Electrical Digest"
"Junior Electrician"
"Elec-Tricks"
"Motor Electrics"
"Short Circuits"

"How and Why" (Questions and Answers.)

Make all checks payable to: "Practical Electrics Co."

PRACTICAL ELECTRICS CO., 53 Park Place, New York

S. I.-9-23

SPECIAL OFFER

Gentlemen:

Although your regular price is $2.00 per year, you will accept my subscription at $1.75 per year (Canada and foreign $2.25). I enclose the money herewith and I have written my name and address in margin below.

Digitized by Google
Original from UNIVERSITY OF CHICAGO

"BUILD YOUR OWN" WITH "RASCO" PARTS!

THE Radio Specialty Company—"RASCO" for short—now in its third year, is unquestionably the oldest and most unique radio parts supply house in the United States, if not in the whole world. This Company makes a specialty of small orders. No order is too small to get immediate and prompt attention. The reason is simple: 80% of our orders are small.

The reputation of this house was built upon service. Ask any of your radio acquaintances what they think of "RASCO" service, "RASCO" promptness. Thousands of unsolicited testimonials are in our files, to prove that we serve the public as it has never been served in radio merchandise before. Be sure to get our great 68-page catalog, containing over 500 different parts. Catalog contains over 300 illustrations. "WE CAN ONLY DISAPPOINT YOU ONCE." Try us with a 50c. order and make us prove what we say. Prices include delivery to your door.

Order direct from this page. We pay all transportation charges. All goods sent prepaid in 24 hours.

NOTE BIG PRICE REDUCTIONS THIS MONTH | **Money refunded if goods do not satisfy**

LOOP AERIAL

The loop aerial you have been waiting for. Made entirely of well seasoned hard wood. Complete with all parts and base; No. 22 enameled wire used. Total height of loop 36", 2 feet on the side; loop is 10 convolutions. Can be put together by anyone in less than 5 minutes. Satisfaction guaranteed.
R-2600, Two foot loop aerial, complete....$1.15

STORAGE BATTERIES

New! New! New! Two volt, 40 ampere hour storage battery for use with WD11, 12, and U.V. 199 tubes. Don't keep on buying dry cells continuously. This storage battery will pay for itself in two months. Only best materials used. Guaranteed for 2 years. You can connect up to 6 dry cell tubes on a single one of these batteries. Can be recharged for a few cents. Hard rubber container encased in impregnated wood case. Due to low price and large weight of batteries, shipped express collect.
R-2400, Two volt, 40 ampere hour storage battery, size 2¼x8x9" $4.25
R-640, Six volt, 40 ampere hour storage battery, size 4¾x7¼x9" 8.75
R-660, Six volt, 80 ampere hour storage battery, size 6x7x9¼" 11.00

WOOD CABINETS

Highest grade mahogany cabinets made. Best hand rubbed finish. Top is hinged. Front of cabinet rabbetted to fit panel. Price delivered to your door; no panel included in these prices. Entire cabinet made of ⅛" well seasoned stock.
R-714, Wood cabinets, panel size 7"x14"..$3.35
R-718, Wood cabinets, panel size 7"x18".. 3.60
R-724, Wood cabinets, panel size 7"x24".. 4.40
R-710, Wood cabinets, panel size 7"x10".. 2.60
R-712, Wood cabinets, panel size 7"x12".. 3.00
R-721, Wood cabinets, panel size 7"x21".. 3.90

CARDBOARD TUBING

Only seamless tubing made in United States. Perfectly seasoned. Heavy wall. (I.D.—Inside Diameter. O.D.—Outside Diameter. L.—Length).
R-6600, 3" I.D., 3⅛" O.D. x 7" L. .....$.30
R-6601, 3⅛" I.D., 3⅜" O.D. x 7" L. ..... .35
R-6602, 3⅛" I.D., 3⅜" O.D. x 6" L. ..... .25
R-6603, 3¾" I.D., 4" O.D. x 5" L. ..... .27
R-6604, 4" I.D., 4¼" O.D. x 5" L. ..... .35
R-6605, 2⅝" I.D. 3" O.D. x 2⅜" L. ..... .15

"RASCO" BEZELS

The finest Bezel on the market. Best brass mesh used. The Bezel comes entirely nickle plated. Will improve looks of your panel 100 per cent. Outside diameter 1". Can be used on ⅛" or 3-16" panel.
R-1700, Rasco nickeled bezel
Each .....$.15

FORMICA PANELS
Clearance Sale.



This sheeting is positively the best grade on the market. High Finish on both sides. Too well known to require much explanation. Due to the fact that we are discontinuing these particular sizes, this material is now offered practically at cost. Prices are about 40 per cent lower than our catalogue list.
Note also that we ship these panels prepaid. This alone amounts to a considerable saving.
R-350, 6"x12"x3-16" thick, each.....$1.50
R-351, 6"x18"x3-16" thick, each..... 1.60
R-352, 9"x12"x3-16" thick, each 1.75
R-353, 12"x18"x3-16" thick, each 4.00
R-354, 6½"x19½"x3-16" thick, each..... 1.90
R-355, 6"x7½"x3-16" thick, each ..... .85
R-356, 6"x14"x3-16" thick, each 1.60
R-357, 6"x4"x3-16" thick, each ..... .65

MELOTONE LOUD SPEAKER

The best popular loud speaker on the market. Has tuned feature the same as all "Rico" phones. Fibre horn, heavy metal base, five foot cord. Nickle gooseneck. Greatest tuned loud talker. Compares favorably with most expensive speakers. Size overall 14½"; horn length 11¾"; bell 6⅝"; total height 9".
R-255, Melotone Speaker.....$4.90

RICO TUNED RECEIVERS

No better phones made. Supersensitive. Awarded Radio News Laboratories Certificate of Merit. The only tuned phone on the market. Can be tuned for any intensity and sensitivity. Magnetic pole of phone is in mathematical center of diaphragm. "Turn the cap to tune."
R-2020, 2000 ohms, double head set $4.45
R-3030, 3000 ohms, double head set $5.50

"RASCO" LUBRICATED PANEL SWITCH

Our patent spring fork holds the switch handle always at a uniform tension. At the same time it insures best contact possible. New wiping contact covers every portion of the switch point. Double leaf blades used.
R-1921, "Rasco" Switch .....$.30

"RASCO" POSTS

R-650, Post made entirely of best black composition—8/32" screw—each .....$.08
R-202, Post has nickel-plated bottom part, each..... .08
Dozen, each style ..... .90



375

"RASCO" SWITCH POINTS

Nickel-plated and polished. The following have been found the most popular.
R-301, ¼"x1¼", 6/32" thread, doz.....$.18
R-302, 3/16" high, ¼" dia., 6/32" thread doz. ..... .18
R-303, 3/16"x3/16", 4-36" thread, doz.... .18
R-304, ¼" dia., ⅛" thick; shank 6/32" doz. ..... .18
R-305, ⅜" dia., 3/16" thick; shank 4/36", doz. ..... .18
R-306, 3/16" dia., 3/16" thick, shank 4/36 doz. ..... 18.
R-307, 3/16" dia., ⅛" thick; shank 4/36, doz. ..... .18
R-375, Switch Stop, ⅞" long, 4/36 thread, complete with nut, each ..... .18

"RASCO" SOCKETTES

Substitute for Vacuum Tube Socket. Four of these take one Vacuum Tube. Grasp tube firmly. Best contact possible. Take less room. Are better.
R-1550, Sockettes, nickeled, set of 4 .....$.25
R-1551 Sockettes, nickeled, set of 4 (to take WD-11 Tube) ..... .25
Note: Set of 4 sufficient to hold 1 Tube.

COPPER FOIL

Thinnest copper foil made, .001" thick. Comes 4" wide.
R-5025, Copper Foil, per ft. $.10
10-ft. length ..... .80

PHONEHORN

Fills a new and distinct want. Base consists of R-1310 Phonodapter described on this page into which fits a fine enameled fibre horn. Size of horn 12"; bell 6½". Slip Phonodapter end on a single telephone receiver and you have the lowest priced loud talker ever made. Mounted in your set or hung in corner of room it will bring sound all over the room. A most useful article. Welcome by all radio fans. R-1321 Phonehorn, prepaid $1.45

AUDIO FREQUENCY TRANSFORMERS



No better Transformer on the market. Highest class materials. Impregnated coils. Silicon steel stampings used. Save 50 per cent by assembling it yourself.
R-1100, A.F. Transformer, ratio 4¼ to 1 .....$2.00
R-1150, A.F. Transformer, ratio 6½ to 1 .....$2.00

RADIO FREQUENCY TRANSFORMERS

The best Radio Frequency Transformer developed so far. Designed for us by Mr. R. E. Lacault, Associate Editor of RADIO NEWS. Air core. Guaranteed to do the work. This Transformer brings in the long distances.
R-2800 Radio Frequency Transformer, size 1⅞"x2½" $1.50

MAGNET WIRE

The following come on 8-ounce spools:
R-2500, Double Cotton No. 18.....$ .50
R-2501, Double Cotton No. 20..... .60
R-2502, Double Cotton No. 22..... .75
R-2503, Double Cotton No. 24..... .85
R-2504, Double Cotton No. 26..... .95
R-2505, Double Cotton No. 28..... 1.15
R-2506, Double Cotton No. 30..... 1.65
The following come on 4-ounce spools:
R-2507, Green Silk No. 20.....$ .50
R-2508, Green Silk No. 22..... .55
R-2509, Green Silk No. 24..... .60
R-2510, Green Silk No. 26..... .65
R-2511, Green Silk No. 30..... 1.05
R-2512, Green Silk No. 32..... 1.30
R-2513, Green Silk No. 36..... 1.85
The following come on 8-ounce spools:
R-2514, Enameled No. 20.....$ .45
R-2515, Enameled No. 22..... .55
R-2516, Enameled No. 24..... .60
R-2517, Enameled No. 26..... .65
R-2518, Enameled No. 30..... .70
R-2519, Enameled No. 32..... .80
R-2520, Enameled No. 36..... 1.00

BRASS RODS

Sold in 6" lengths only
R-8032, Brass Rod, 8/32" thread, per length .....$.08
R-6032, Brass Rod, 6/32" thread, per length ..... .06
R-1425, Brass Rod, plain ¼" round, per length ..... .10
R-3616 Brass Rod, plain 3/16" round, per length ..... .06

"RASCO" NAME PLATES

The circular plate is our new Binding Post Name Plate. Diameter, ¾". These denominations: PHONES, GROUND, —, OUTPUT, "A" BATTERY —, "B" BATTERY —, LOUD SPEAKER, GRID, LOAD, "C" BATTERY —, AERIAL, +, INPUT, "A" BATTERY + "B" BATT +, LOOP, TICKLER, PLATE, "C" BATT +, FILAMENT.
R-6000 to 6019, Binding Post Name Plates, each denomination .....$.03
Dozen ..... .30

"RASCO" VERNIER

Cleverest vernier made. Can be used with any dial. Soft rubber ring engages dial. Does away with vernier condenser. We guarantee results. All metal parts moulded in best black composition. Nothing to come apart. Biggest hit of the season.
R-1450, Vernier .....$.30

REINARTZ SPIDERWEB COIL

Here is a very fine inductance for Reinartz circuit, 200-600 meters. 19 turns. Size 4½" diameter; 1½" center opening. Can be used in nearly all new circuits. Construction: double spider-web throughout. Coil is firm and will not fall apart as is case with many inferior makes. A few of these coils will work wonders in your set.
R-2650 Spider-web Reinartz coil $1.15

PHONODAPTER

The Phonodapter will fit any phone. Metal tube fits any standard phonograph. Make your phonograph a loud talker. Fits Columbia, Victor and Sonora phonographs. Is made entirely of pure soft rubber with brass tube inserted.
R-1310 Phonodapter ..... $. 95

DOUBLE PHONODAPTER

The Double Phonodapter fits all phonographs and will take any standard double head set, thereby making your phonograph a loud talker. Made of cast metal, nickel plated and highly polished. Has three generous soft rubber bushings.
R-1320 Double Phonodapter ..... $. 95

"RASCO" CORD TIP JACKS

Take the place of binding posts on instruments or panel. Cord tip firmly gripped by jack. Made of brass, highly nickel-plated and polished. Screw to attach lead wire. No soldering necessary.
R-1500, Cord Tip Jack, each.....$.15

LITZ WIRE

R-323, equals No. 25 B&S, per foot .....$.02
R-890, equals No. 28 B&S, per foot ..... .01
R-891, equals No. 21 B&S, per foot ..... .03
R-892, equals No. 20 B&S per foot ..... .04
Discounts of 10 percent in 100-ft. lots.

UNIVERSAL BEARING

THE bearing to hold variometer and variocoupler rotors. Total length of bearing 2¼". Outside shaft, 1¼". Length of thread 1". Length of threaded sleeve, ¾".
R-1375, Bearing .....$.25

PANEL MOUNTING VARIABLE CONDENSERS

This condenser presents the latest word in precision mechanics. Plates, washers, and all other parts are accurately machined. Positively no better condenser on the market. Shafts ¼". Save from 40% to 60% by assembling condenser yourself. A child can do it in a few minutes spare time. Capacities guaranteed.
R-1111 11 plate condenser, .00025 mfd....$1.10
R-2121 21 plate condenser, .0005 mfd..... 1.22
R-4343 43 plate condenser, .001 mfd..... 1.50

The "Rasco" Catalog

CONTAINS 75 VACUUM TUBE HOOK-UPS, 300 ILLUSTRATIONS 500 ARTICLES, 68 PAGES

All Armstrong Circuits: These important circuits are explained clearly, all values having been given leaving out nothing that could puzzle you.

Just to name a few of the Vacuum Tube circuits: The V.T. as a detector and one-step amplifier; Armstrong circuits; one-step radio frequency amplifier and detector; three stage audio-frequency amplifier; short wave regenerative circuits; 4-stage radio frequency amplifiers; radio and audio frequency amplifier; inductively coupled amplifier; Armstrong superautodyne, etc.

Catalog mailed only upon receipt of **15 Cents in Stamps or Coin.**

Rasco Trade Mark

RADIO SPECIALTY CO.

100 Park Place - - - New York City

Only Exclusive Original Exclusive
R in U. U n. House in U. S.

Factories E E , Elkridge, Md.

DEALERS
Get Our Special Proposition

Digitized by Google
Original from UNIVERSITY OF CHICAGO
THE PERIODICAL PRESS, NEW YORK

ENGINEERS

JUST OUT

A $10,000 MASTER SET ON LATEST ENGINEERING

AUDELS ENGINEERS AND MECHANICS GUIDE 1
ENGINE PRINCIPLES VALVE SETTING PUMPS
AUDELS ENGINEERS AND MECHANICS GUIDE 2
CORLISS UNIFLOW PUMPING CONTRACTORS ENGINES
AUDELS ENGINEERS AND MECHANICS GUIDE 3
LOCOMOTIVE MARINE TURBINE ENGINES INDICATORS
AUDELS ENGINEERS AND MECHANICS GUIDE 4
GASOLINE OIL ENGINES PRODUCERS AVIATION
AUDELS ENGINEERS AND MECHANICS GUIDE 5
STEAM FUEL ECONOMY BOILER CONSTRUCTION
AUDELS ENGINEERS AND MECHANICS GUIDE 6
FIRING OIL BURNERS STOKERS REPAIRS
AUDELS ENGINEERS AND MECHANICS GUIDE 7
PIPE FITTING HEATING REFRIGERATION ELEVATORS
AUDELS ENGINEERS AND MECHANICS GUIDE 8
WIRING AND ELECTRICAL REFERENCE ILLUSTRATED
ENGINEERS AND MECHANICS GUIDES
QUESTIONS ANSWERS AND ILLUSTRATIONS
LOOK WITHIN

AUDEL'S ENGINEERS & MECHANICS GUIDES

4750 pages—8754 Illustrations—Pocket Size—Flexible Binding

$1 Per Month

Every Engineer, Mechanic and Electrical Worker will welcome this new Master Set. It will answer your problems. It will help you with your daily work. A sure source of advancement and higher pay. Complete up-to-date information that is thoroughly and easily explained on every branch of **Modern Engineering and Electrical Practice.**

A dollar a month is all it costs to have in your possession all the latest information on engineering.

$12 Complete

THE GUIDES TELL YOU ALL ABOUT

Theory, Practice and Operation of ALL Steam Engines, Valve, Motions, VALVE SETTING; CORLISS ENGINES, UNIFLOW and POPPET VALVE ENGINES, LOCOMOBILES—Locomotive—Marine Engines; Turbines; Rotary Engines—the Indicator—Lubrication—PRACTICAL MANAGEMENT. How to use Indicator—GAS, OIL and DIESEL ENGINES—Aeroplanes, Aviation—HOW TO SELECT AN ENGINE. STEAM ENGINE DESIGN. Theory and Construction of ALL Steam Boilers; Heat-Combustion; Fuel and Flue Gas Analysis—CO_2 Recorders—Characteristics of Boilers—Materials. Boiler Construction—Mechanical Stokers—Oil Burners—Setting—Chimneys—Mechanical Draught—HOW TO SELECT A BOILER. BOILER DESIGN based on A. S. M. E. BOILER CODE—OPERATION of Steam Boilers—Pipes and Pipe Fitting—Heating and Ventilation—Refrigeration—Cooling Towers—Condensers—Distilling Apparatus—Elevators—Cranes and Hoisting Machinery—Ropes and Cables—Splicing—Compendium of Practical Electrical Engineering—Ready Reference Index, covering entire field of Modern Electricity.

SHIPPED TO YOU FREE!

Not a cent to pay until you see the books. No obligation to pay unless you are satisfied. Send coupon now—**today**, and get this new **Master Set** for **Engineers** and see if it is not worth $100 to you. Pay only $1.00 a month.

Theo. Audel & Co., 72 Fifth Ave., New York City. Please submit me for free examination, Audel's **Engineers and Mechanics Master Set** in 8 volumes. If Satisfactory I agree to send you $1 within seven days, and to further mail you $1 each month until $12 is paid.

Name.....

Occupation.....

Employed by.....

Home Address.....

S.I. Sept.

Digitized by Google

Original from UNIVERSITY OF CHICAGO

Not a Toy **Not a Fad--A Proven Scientific Instrument**

Health-Vigor-Success-

By means of Marvelous-VIOLET RAYS

Use it Yourself at Home

FREE Book

offer FREE this wonderful book de- ng the marvelous, strange new force, t Rays. Explains in simple words and es how Violet Rays revitalizes every nd works apparent miracles in helping ercome pain and sickness.

Practicing physicians and plain home folks explain in this book how Violet Rays has made them well, strong and happy. 60 pages, illustrated with actual photographs, scientific charts and diagrams. It's FREE.

A Proven Aid To BEAUTY

Brings natural, magnetic beauty of health, no dieting, exercises or drugs. Home treatments save money.

Acts Instantly—No Delay, No Waiting

t Rays work at once, you feel results immediately. et Rays is the finest thing I ever used to relieve con- n in any part of the body, and to relieve pain. Treatments are so pleasant that all my patients like it," writes Dr. Duncan, Kewanee, Ill. You can use it at home and get equally good results yourself.

e New Way—No Medicines

without drugs or cine, it's scientific, after the cause, that's it gets results. Note ist of ailments Violet Rays treats successfully, and many others. Success in Business and Social affairs depends on health, it is in your easy reach.

Check Your Ailment Below for Free Advice

Here is a partial list of ailments successfully treated with Violet Rays:

Catarrh	Eye Disease	Nervousness	Sore Throat
Chilblains	Falling Hair	Neuralgia	Sprains
Colds	Hay Fever	Neuritis	Tonsilitis
Constipation	Headache	Paralysis	Whooping Cough
Deafness	Goitre	Piles	
Earache	Insomnia	Rheumatism	Asthma
Eczema	Lumbago	Skin Diseases	

end FOR NEW FREE BOOK

EVEALS MARVELOUS SCIENTIFIC METHODS

ins how Nikola Tesla discovered Violet Rays, how it works, t heals. Tells what doctors and plain folks accomplish in ering pain, disease and nervous troubles. Shows charts of n body, explains where pains start, how to banish them. d FREE for a limited time only, to introduce Violet Rays.

Representatives

Men and women, without experience, earn liberal profits in spare time showing Violet Rays to neighbors. Proves results demonstration, sells on sight. Wholesale price and per- nt territory to representatives.

VI-REX ELECTRIC CO., 326 WEST MADISON ST. DEPT. 49 CHICAGO

Please send me without any cost or obligation your free book describing your VI-REX Violet Ray Outfits, and details of your free trial offer.

Name .....

Address .....

City ..... *State* .....

Digitized by Google
Original from UNIVERSITY OF CHICAGO